





## FOAM-TITE® DS-C2 SEALING PRODUCTS

TESTED TO NAFS

### Why Use DS-C2?



- » Reduces air & water infiltration
- » Eliminates the need for welding or sealing mitered joints
- » Reduces inventory
- » Standard colours: black & beige
- » Custom order colour: grey
- » Reduces operating force
- » Reduces labour installation & costs
- » Easy insertion, excellent retention
- » UV stable

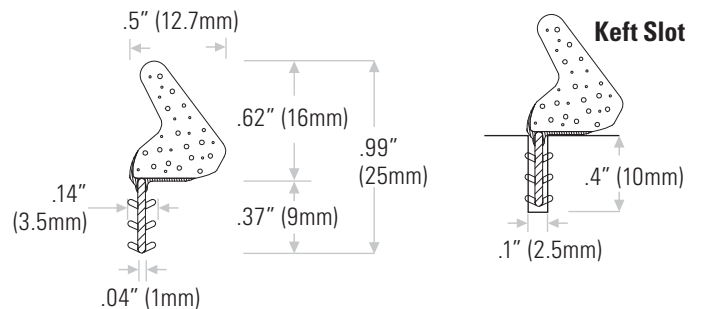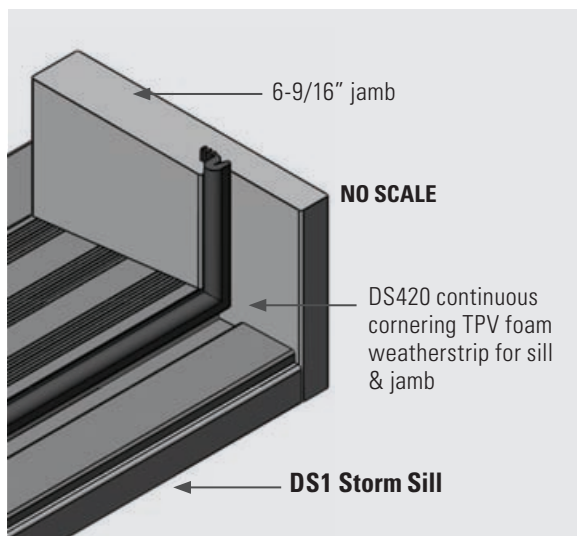

**DS420BL500** Black

**DS420BEIGE500** Beige

Available in 500 ft (152.4m) coils or 1000 ft (304.8m) per carton




**DS419BL1000** Black

**DS419BEIGE1000** Beige

Available in 1000 ft (304.8m) coils.

**Custom order, call for manufacturing time**




**Keft Slot**

**DS436BL1500** Black

**DS436BEIGE1500** Beige

Available in 1500 ft (457.2m) coils.

**Custom order, call for manufacturing time**



**Keft Slot**

**DS437BL1500** Black

**DS437BEIGE1500** Beige

Available in 1500 ft (457.2m) coils.

**Custom order, call for manufacturing time**