






DraftSeal® DSS11 & DSS66 Series (DS Silicone)

Self Adhesive Jamb Weatherstrip Door Gasket Seal

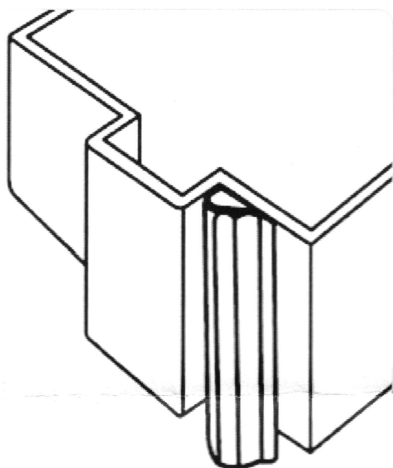

Also available in 306 ft. bulk coils.

Application Details for DSS11, DSS66, DS44 & DS55

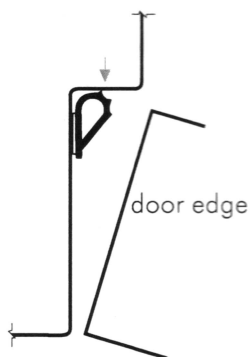

Alternate positioning for hinge jamb, strike jamb & header (door must be able to operate properly).

NO SCALE

DSS11 & DSS66 Installation Instructions

Storage And Application Instructions

Storage: All adhesive gaskets have a limited shelf life. These products must be used within 6 months of purchase & must be stored in a cool dry area, at ambient conditions (between 50° & 100° Fahrenheit [10° & 38° Celsius]) to ensure the uniformity and performance of the product.

Surface Preparation:

1. Surface must be free from dust, mold releases dirt, oil, and moisture for optimum bond strength.
2. Surface temperatures below 72°F will adversely affect bond strength. Be sure both parts are at room temperature or above before application.
3. Cleaning agents should be employed which do not leave a residue. Examples are: Alcohol wipe included or Acetone (proper safety practices should be adhered to as prescribed by the material safety data sheet).
4. A buffed or slightly roughened surface will usually increase bond strength.

Installation

- Step 1** » Remove approximately 36" of paper backing from the SILICONE GASKET strip-being careful not to touch with dirty or sweaty hands or drag adhesive in dust or dirt.
- Step 2** » Position SILICONE in rabbet of stop and press in place without stretching the SILICONE. Press each inch of length to activate all of the adhesive to the frame.
- Step 3** » Remove next 36" of paper backing repeating step B until entire length for head or jamb is installed. Do not install as one continuous piece-cut material at corners where head and jambs meet.



Tested in accordance with CAN/ULC S104, ASTM-E-152, CFSM, 43.7, NFPA 252, UBC 7-2-1994 (formerly UBC 43-2-1991), UL 10(b) LISTED FOR CANADA AND USA

Product listed by this by this symbol are labeled as GASKETING MATERIAL FOR USE ON LISTED STEEL FRAMES AND LISTED SWINGING TYPE FIRE DOORS OF THE HOLLOW METAL OR STEEL COVERED COMPOSITE TYPE RATED UP TO 1 ½ HOURS. These products have been listed and labeled as a result of testing done by Warnock Hersey certifying hat these gasketing products do not adversely affect the fire resistance of the door frame. Products are regularly checked under the follow-up factory inspection and certification service for manufacturing compliance service for manufacturing compliance with Warnock Hersey specifications. Contact A.K. Draftseal Ltd. For further information.

WARNING: INCORRECT SURFACE PREPARATION MAY RESULT IN INCOMPLETE SETTING OF ADHESIVE AND SEPARATION OF SEALPRENT GASKET FROM THE FRAME. It is not recommended that installation of adhesive backed materials take place after construction is completed, flooring material has been installed and the final cleaning has taken place.

Head Office & Manufacturing Centre - Vancouver, Canada

7470 Buller Avenue, Burnaby, B.C. V5J 4S5 Canada • info@theDSgroup.com

Ph: (604) 451-1080 • Fax: (604) 451-1140 • Outside Vancouver, BC use toll free numbers Ph: 1-888-520-9009 Fax: 1-800-567-2887

Branch Offices & Manufacturing Centres

Toronto, Canada & Los Angeles, USA

Eclipse Architectural® Corporate Showrooms

Vancouver & Toronto, Canada • Los Angeles, California & Honolulu, Hawaii USA

THE DS GROUP IS THE BRAND IMAGE OF A.K. DRAFT SEAL LTD.