

Industrial Product Catalog

United States

ECLECTIC
IN THE HOME & ON THE JOB PRODUCTS



E6000

E6000[®] PLUS

**AMAZING
GOOP**

**Shoe
Goo[®]**

**EXTREME
MOISTURE CURE**

SEALALL[®]
Gas & Oil Resistant

FAMOWOOD[®]

WT

TABLE OF CONTENTS



Page 3: About Eclectic Products LLC

United States Product Pages 4 - 17

Page 4 - 7: CARTRIDGE ADHESIVES: E6000, E6100, E6800, Extreme & FRP



Page 8: ADHESIVE: E6000 PLUS



Page 9: SPRAY & CARDED ADHESIVES: E6000 Spray Adhesive & Seal-All



Page 10 -11: WOOD FILLER: Famowood Original & Latex Wood Fillers



Page 12: WOOD FILLER: Wood-Tex Resin Based Wood Filler

Page 13: COATINGS: Famowood Glaze Coat & Amazing GOOP Coat-It

Page 14: CARDED ADHESIVES: Amazing GOOP

Page 15: CARDED ADHESIVES: Amazing GOOP II MAX, Amazing GOOP TRIM Repair & Shoe GOO

Page 16: INDUSTRIES SERVED

All packaging illustrates complete English and Spanish Translations.

PRODUCTS LISTED ARE INTENDED FOR DISTRIBUTION IN THE UNITED STATES OF AMERICA. EPI will not accept responsibility for goods improperly shipped to locations outside of the USA. Products listed comply with language and regulatory rules of the USA.



Who we are.

ECLECTIC

IN THE HOME & ON THE JOB PRODUCTS

Providing the best quality of products, goods and services... that is our goal each and every day as part of the Eclectic Products family. Our products continue to evolve as a result of our desire to find new solutions to fit consumer and professional tradesmen's needs. The powerful brands we offer - E6000, Amazing GOOP, Shoe GOO, Seal-All, Famowood and Glaze Coat - and the strength of our service performance and technical R&D abilities have made us a leader in the North American market. Our vertical integration from concept, to design, to production, to shipment, coupled with our ability to customize special product/order needs make us an outstanding partner.

OUR PRODUCTS ARE PROUDLY MANUFACTURED IN PINEVILLE, LOUISIANA We are also ISO Compliant with business and production practices. As the product tag lines indicate - our adhesive products **FIX WHAT OTHER GLUES SIMPLY CAN'T®** and **BONDS EVERYTHING SO YOU CAN CREATE ANYTHING®**. Our superior wood filler products have been **THE CHOICE OF PROFESSIONAL WOODWORKERS FOR 70+ YEARS.**

Eclectic Products specializes in adhesive/patch/coatings and repair products ranging from a 0.18 oz. tube to industrial sized totes and drums. We welcome your business and value partnerships forged with honesty and integrity.

TECHNICAL SERVICE

(800) 767-4667

Product information & use.
Where to purchase our products.

CUSTOMER SERVICE

(800) 349-4667

Order information

MANUFACTURING/WAREHOUSE

101 Dixie Mae Drive
PO Box 4450 (71361)
Pineville, LA 71360-3993

CORPORATE OFFICE

990 Owen Loop North
Eugene, OR 97402

EMAIL: info@eclecticproducts.com
WEBSITE: eclecticproducts.com



Our parent company.




Willamette Valley Company

Willamette Valley Company LLC is a leading-edge, privately-owned multinational corporation that manufactures and distributes a wide variety of custom products and services throughout the United States, Europe, Canada, Asia, and South America. While our roots are in the wood products industry and go back to our inception in 1952, our expertise and solutions now encompass innovative coatings, fillers, adhesives, robotics, parts, engineering, and specialties.

WVCO SPECIALIZES IN:

- Custom Robotics
- Custom CNC Machining
- Engineering
- Electrical Panel & PLC Programming
- Chemical & Equipment Research & Development
- Custom Solutions
- Manufacturing
- Service & Repair
- Replacement Parts

WVCO partners / subsidiaries:



E6000

Our E6000 family of industrial strength adhesives are tough, extremely flexible and highly versatile formulas. They are indispensable maintenance tools that allow the kind of permanent adhesion not found in silicones and rubber cements. Their strength in adhering most any types of materials make them universal repair adhesives.

E6000, E6100 and E6800 are non-flammable, vibration proof products that form a permanent bond. Use indoors or out.



SELF-LEVELING

E6000® PRO-GRADE ADHESIVE

E6000 is the self-leveling formula that is outstanding for bonding same or dissimilar materials with superior strength.

Sales Part # Size / Fill Type Case Pack Color

LOW VISCOSITY

| | | | | |
|---------|-----------|--------|---|-------|
| 244021* | 1 Gallon | Pail | 4 | Clear |
| 245031* | 5 Gallon | Bucket | 1 | Clear |
| 246041* | 55 Gallon | Drum | 1 | Clear |

MEDIUM VISCOSITY

| | | | | |
|---------|------------|------------------------|-----|-------|
| 230400 | 0.18 fl oz | Bulk | 500 | Clear |
| 230450 | 0.18 fl oz | 50 PC/Box | 3 | Clear |
| 231012 | 1.0 fl oz | Bulk | 12 | Clear |
| 230021 | 3.7 fl oz | Bulk | 12 | Clear |
| 230022 | 3.7 fl oz | Auto/Industrial Carded | 6 | Clear |
| 230025 | 3.7 fl oz | Bulk Display | 24 | Clear |
| 230031 | 3.7 fl oz | Bulk | 12 | Black |
| 232021 | 10.2 fl oz | Cartridge | 12 | Clear |
| 232031 | 10.2 fl oz | Cartridge | 12 | Black |
| 234061* | 1 Gallon | Pail | 4 | Clear |
| 235071* | 5 Gallon | Bucket | 1 | Clear |
| 236081* | 55 Gallon | Drum | 1 | Clear |

HIGH VISCOSITY

| | | | | |
|---------|------------|--------------|----|-------|
| 220011 | 3.7 fl oz | Bulk | 12 | Clear |
| 220015 | 3.7 fl oz | Bulk Display | 24 | Clear |
| 222011 | 10.2 fl oz | Cartridge | 12 | Clear |
| 224021* | 1 Gallon | Pail | 4 | Clear |
| 225031* | 5 Gallon | Bucket | 1 | Clear |
| 226041* | 55 Gallon | Drum | 1 | Clear |

* NOT AVAILABLE FOR SALE OR SHIPMENT INTO THE STATE OF CALIFORNIA.

⚠️ **WARNING:** This product can expose you to chemicals including perchloroethylene which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

E6000® SNIP TIP APPLICATORS

| Sales Part # | Size / Fill | Case Pack | |
|--------------|-------------|-----------|-------------------------|
| 0499210-B | Snip Tips | 100/bag | Fits 3.7 oz tubes |
| 0499910-B | Snip Tips | 100/bag | Fits 1.0 & 2.0 oz tubes |



NON-SAG

E6100® PRO-GRADE ADHESIVE

E6100 is the non-sag formulation that won't slump or run, allowing for maximum control in overhead and vertical applications.

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|-----------|-----------|-------|
| 252011 | 10.2 fl oz | Cartridge | 12 | Clear |
| 252031 | 10.2 fl oz | Cartridge | 12 | Black |
| 252041 | 10.2 fl oz | Cartridge | 12 | Gray |
| 252051 | 10.2 fl oz | Cartridge | 12 | White |
| 254021* | 1 Gallon | Pail | 4 | Clear |
| 255031* | 5 Gallon | Bucket | 1 | Clear |
| 256041* | 55 Gallon | Drum | 1 | Clear |

* NOT AVAILABLE FOR SALE OR SHIPMENT INTO THE STATE OF CALIFORNIA.

⚠️ **WARNING:** This product can expose you to chemicals including perchloroethylene which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

UV RESISTANT

E6800® PRO-GRADE ADHESIVE

E6800 provides ultra-violet resistance for marine and outdoor applications. It is an excellent insulator against water, corrosion from salt spray, bacteria, most chemicals and vibration. E6800 maintains its adhesive strength, even when submerged under water.

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|-----------|-----------|-------|
| 260011 | 3.7 fl oz | Bulk | 12 | Clear |
| 262011 | 10.2 fl oz | Cartridge | 12 | Clear |
| 264011* | 1 Gallon | Pail | 4 | Clear |
| 265011* | 5 Gallon | Bucket | 1 | Clear |
| 266011* | 55 Gallon | Drum | 1 | Clear |

* NOT AVAILABLE FOR SALE OR SHIPMENT INTO THE STATE OF CALIFORNIA.

⚠️ **WARNING:** This product can expose you to chemicals including perchloroethylene which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.



2X STRONGER
60X MORE FLEX
THAN POLYURETHANE ADHESIVES*

FORMULATED SPECIFICALLY
TO MEET HIGH PERFORMANCE
INDUSTRIAL REQUIREMENTS



COMMERCIAL APPLICATIONS



FLEET MAINTENANCE



MARINE MAINTENANCE



PLANT MAINTENANCE

PHYSICAL CHARACTERISTICS

| PHYSICAL CHARACTERISTICS - uncured material | | | |
|---|--|--|--|
| | E6000 Self-Leveling | E6100 Non-Sag | E6800 UV Resistant |
| Solids | 30% by weight/40% by volume | 30% by weight 40% by volume | 30% by weight 40% by volume |
| Density | 11.0 +/-0.1 lbs/gal | 11.0 +/-0.1 lbs/gal | 11.0 +/-0.1 lbs/gal |
| VOC | 2.0 grams/liter | 2.0 grams/liter | 2.0 grams/liter |
| Tack time | 5 minutes | 4 minutes | 5 minutes |
| Full cure time | 24 hours (thin film); 48-72 hours (thick film) | 24 hours (thin film); 48-72 hours (thick film) | 24 hours (thin film); 48-72 hours (thick film) |
| Storage | Store between 50 to 80 °F (10 to 27 °C) | Store between 50 to 80 °F (10 to 27 °C) | Store between 50 to 80 °F (10 to 27 °C) |
| Freeze/thaw stability | Stable, allow product to warm to room temperature before using | Stable, allow product to warm to room temperature before using | Stable, allow product to warm to room temperature before using |
| Colors Available | Clear, Black | Clear, White, Gray, Black | Clear |
| Viscosity | 50,000 cps (low) / 100,000 cps (medium) / 200,000 cps (high) | 100,000 cps | 100,000 cps |
| Shelf Life | 2 years (unopened) | 2 years (unopened) | 2 years (unopened) |

| PHYSICAL CHARACTERISTICS - cured material | | | |
|---|--|--|--|
| | E6000 Self-Leveling | E6100 Non-Sag | E6800 UV Resistant |
| Hardness | 80 Shore A | 80 Shore A | 80 Shore A |
| Tensile strength (ASTM D-412) | 3,500 lb/in ² | 3,800 lb/in ² | 3,500 lb/in ² |
| Elongation (ASTM D-412) | 900% | 900% | 900% |
| Chemical resistance | Excellent to water, dilute acids & dilute bases | Excellent to water, dilute acids & dilute bases | Excellent to water, dilute acids & dilute bases |
| Temperature range | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. |
| Paint-over time | 24 hours | 24 hours | 24 hours |
| UV resistance | Paint over or use E6800 | Paint over or use E6800 | Yes |
| Dielectric strength (ASTM D-149) | 400 V/mil. This is the maximum voltage that can be applied to a given material without causing it to break down. | 400 V/mil. This is the maximum voltage that can be applied to a given material without causing it to break down. | 400 V/mil. This is the maximum voltage that can be applied to a given material without causing it to break down. |

PRO-GRADE STRENGTH TO MOST ALL SURFACES

| ADHESION & FLEXIBILITY TEST RESULTS ASTM D-412 | | |
|---|------------------------|--------------|
| Adhesive | Tensile Strength (Psi) | % Elongation |
| E6000, E6100, E6800 | 2,703 | 1,088 |
| PL Premium | 949 | 18 |

| 180° Peel Strength Test - ASTM D 903 | | | | | |
|--------------------------------------|-----------|-----------|-----------|-----------|-----------|
| Adhesive | Glass | Steel | PVC | Birch | Aluminum |
| E6000, E6100, E6800 | 34 | 45 | 38 | 40 | 35 |
| SikaFlex 1A | 19 | 16 | 10 | 21 | 16 |
| SikaFlex 221 | 27 | 13 | 5 | 32 | 8 |
| SikaFlex 227 | 27 | 19 | 6 | 19 | 9 |
| SikaFlex 252 | 31 | 22 | 4 | 37 | 8 |
| PL Roof & Flashing | 7 | 15 | 5 | 22 | 4 |
| PL 200 | 6 | 18 | 11 | 29 | 14 |
| PL 375 | 25 | 31 | 26 | 22 | 24 |
| PL Premium | 22 | 19 | 15 | 21 | 15 |
| DAP SideWinder | 21 | 20 | 24 | 23 | 18 |
| Weld On 55 | 20 | 37 | 37 | 34 | 35 |
| Lord 320/322 | 31** | 29** | 30** | 31** | 28** |
| Lord 406/19 | 27** | 26** | 26** | 29 | 27** |

Avg. Max Load Measured in pli (pounds per linear inch) ** indicates that the tape was made very brittle and broke without the adhesive breaking.

E6000
OUTSTANDING ADHESION ON POROUS AND NON-POROUS SURFACES



EXTREME

PREMIUM SEALANT

EXTREME is a high performance polyether **MOISTURE CURE** sealant that is solvent-free and has instant grab. EXTREME has superior bonding strength, while also being more environmentally friendly than many other adhesives, with only 2% VOC. EXTREME IS COMPRISED OF 100% SOLIDS AND WILL NOT SHRINK.

EXTREME PREMIUM SEALANT

Sales Part # Size / Fill Type Case Pack Color
575012 10.1 fl oz Cartridge 12 White



SUPERIOR STRENGTH ON MOST SUBSTRATES

| ADHESION TEST RESULT | LAP SHEAR TEST | | | | ASTM D 3164-03 |
|--|----------------|--------|----------|--------|----------------|
| | PRODUCT | STEEL | ALUMINUM | PVC | |
| EcoGlue® EXTREME | 280.96 | 293.78 | 247.25 | 239.60 | |
| Eco-Bond HD 100 All Purpose | 162.23 | 228.28 | 118.94 | 147.32 | |
| Eco-Bond LD 50 Trim/Tub/Sink/Tile | 93.97 | 94.16 | 98.76 | 219.96 | |
| Sikaflex 1a | 65.30 | 65.07 | 46.43 | 65.30 | |
| Sikaflex 221 | 83.64 | 83.61 | 59.96 | 153.02 | |
| Sikaflex 227 | 78.41 | 62.86 | 50.67 | 199.01 | |
| Sikaflex 252 | 122.39 | 86.79 | 53.54 | 399.29 | |
| DAP Clear Flexible | 9.14 | 7.45 | 7.16 | 13.70 | |
| DAP SideWinder Siding/Window | 171.10 | 205.50 | 69.75 | 146.53 | |
| PL 200 | 14.77 | 12.19 | 8.55 | 43.55 | |
| PL Roof & Flashing | 187.71 | 156.47 | 89.12 | 204.77 | |
| PL 375 Heavy Duty | 77.31 | 70.44 | 53.97 | 116.84 | |
| PL Window Door & Siding | 169.99 | 114.42 | 70.29 | 195.29 | |
| Projects & Repair TiteBond GREEN choice | 85.00 | 40.45 | 44.89 | 304.85 | |
| Heavy Duty TiteBond GREENchoice | 89.06 | 62.76 | 51.60 | 294.46 | |
| Premium Polyurethane TiteBond GREENchoice | 302.27 | 205.77 | 132.41 | 183.24 | |
| Weatherproof SubFloor TiteBond GREEN choice | 60.64 | 29.39 | 24.56 | 651.06 | |
| Professional Drywall TiteBond GREEN choice | 112.21 | 86.24 | 98.95 | 593.45 | |
| Professional Cove Base TiteBond GREEN choice | 120.64 | 39.66 | 12.66 | 120.55 | |
| Avg. Max Load Measured in Psi (lbs. per square inch) | | | | | |



| PHYSICAL CHARACTERISTICS - uncured material | |
|---|---|
| Technology | Polyether Moisture Cure |
| Solids | 100% solids |
| Density | 1.39 (11.6/Gal) |
| VOC | Less than 2% |
| Tack time | 35 minutes (ASTM C-679) |
| Full cure time | 3 to 7 days, depending upon temperature, humidity and thickness. |
| Storage | Store in original unopened container and in a cool dry area. Protect container from heat and direct sunlight. Elevated temperatures will reduce shelf life. |
| Freeze/thaw stability | Will not freeze; allow product to warm to room temperature before using. |
| Color | White |
| Viscosity | 1,000,000 + cPs Brookfield RVF, TF spindle, 4 RPM, 70 °F (21 °C) |
| Odor | None |
| Application | Apply above 30 °F (-1 °C) |
| Solvent-Free | No solvents. Safe to use indoors or in confined spaces. No odor. No Prop 65*. No outgassing. |
| Skinning / Tack Time | Instant grab, and typically skins over in 35 minutes. |
| Interior / Exterior | Ideal for indoor / outdoor use. |
| Formaldehyde FREE | Yes. Contains no free phenol and/or urea formaldehyde resins. |
| Shelf Life | 2 years (unopened) |

| PHYSICAL CHARACTERISTICS - cured material | |
|---|--|
| Sag | Zero Slump (ASTM C-697) |
| Hardness | 45 +/- 5 Shore A (ASTM C-661) |
| Shear strength | 350+ PSI (ASTM D-1002) |
| Elongation | 300% (ASTM D-412) |
| Water resistance | Excellent, when fully cured |
| Temperature range | -40 to 200 °F (-40 to 93 °C) |
| Paint-over time | 24 hours |
| UV resistance | Excellent |
| Low Temperature Flex | -20 °F (-29 °C) pass 1/4" mandrel |
| Shrinkage | No measurable shrinkage after 14 days. |

ASTMs

ASTM C-920, Type S, Grade NS, Class 25, use NT, T, M, G, A and O Federal Specification TT-S-00230-C Type II, Class A • Corps of Engineers CRD-C-541, Type II, Class A Canadian Standards Board CAN 19, 13-M82



PREMIUM ADHESIVE



FIBER REINFORCED POLYMER (FRP) ADHESIVE is a unique NON-SAG PREMIUM adhesive. This adhesive will not sag, drip or run and is excellent for use in applications requiring vertical and horizontal hold. FRP Premium Adhesive is waterproof and withstands temperatures from between -40 and 150 °F / -40 and 66 °C allowing it to maintain its extreme bond and flexibility—even in extreme weather conditions! FRP dries clear and is paintable and sandable. This clear, fiber reinforced polymer adhesive is a premium no-sag formula. It's ideal for vertical applications. It bonds in cold weather too!

FRP PREMIUM ADHESIVE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|-----------|-----------|-------|
| 252012 | 10.2 fl oz | Cartridge | 12 | Clear |

WARNING: This product can expose you to chemicals including perchloroethylene which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

| PHYSICAL CHARACTERISTICS - uncured material | |
|---|---|
| Solids | 30% by weight, 40% by volume |
| Density | 11.0 +/- 0.1 lbs/gal |
| VOC | 2.0 grams/liter |
| Tack time | 4 minutes |
| Full cure time | Thin film: 24 hours Thick film: 48-72 hours |
| Storage | Store in dry area between 50 to 80 °F (10 to 27 °C) |
| Freeze/thaw stability | Stable, allow product to warm to room temperature before using. |
| Color | Clear (color matching available) |
| Viscosity | Non-sag: 1,000,000 cps |
| Non-flammable | Yes |
| Solvent | Perchloroethylene |
| Shelf life | 2 years (unopened) |

| PHYSICAL CHARACTERISTICS - cured material | |
|---|--|
| Hardness | 80 Shore A |
| Tensile strength | 3800 lb/in ² (ASTM D-412) |
| Dielectric strength | 400V/mil (ASTM D-149); this is the maximum voltage that can be applied to a given material without causing it to break down |
| Elongation | 900% (ASTM D-412) |
| Temperature range | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. |
| Chemical resistance | Excellent to water, dilute bases |

| STRENGTH TEST | | |
|----------------------------------|---|---|
| ADHESIVE | FRP VERTICAL ADHESIVE (non-load bearing columns) | Polyurethane Foam (capital material) |
| FRP VERTICAL ADHESIVE | 43 | 54 |
| PL Polyurethane* | 21 | 19 |
| PL-400 Construction Adhesive* | 36 | 25 |

180° Peel Test based on ASTM D 903 - November, 2007
Avg. Max. Load Measured in Lb. F/in. (pounds per square inch)

*Competitor products



E6000® PLUS



E6000® PLUS ADHESIVE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|---------------|
| 570110 | 0.9 fl oz | Carded | 6 | Crystal Clear |
| 570120 | 1.9 fl oz | Carded | 6 | Crystal Clear |

E6000 PLUS is formulated using a premium polymer technology, and offers virtually the same performance characteristics consumers LOVE with E6000...

WITH NO ODOR!

Its WATERPROOF formula and ALL-WEATHER PERFORMANCE make E6000 PLUS excellent for INDOOR and OUTDOOR applications! It can be used on most **ANY SUBSTRATE** and just about **ANY APPLICATION**. Other performance characteristics that make this a truly revolutionary adhesive:

- SOLVENT-FREE
- Crystal clear
- Superb UV RESISTANCE
- Paintable
- Remains flexible
- Self-levels
- Maintains its permanent bond strength
- Washer-dryer safe
- Acid-free
- Less than 3% VOCs

EXCELLENT ADHESION TO: Wood, Glass, Fabric, Ceramic, Gems, Metals, Marble, Fiberglass, Concrete, most plastics, lexan, plexiglass & much more!

E6000® SNIP-TIP APPLICATORS

| Sales Part # | Size / Fill | Case Pack |
|--------------|----------------------------------|-----------|
| 0499910-B | Fits 0.9 fl oz & 1.9 fl oz tubes | 100 bag |



ADHESIVES




E6000®

A multi-purpose super strong, permanent, water-based spray adhesive. No Odor. Easy Water Clean-Up. Interior/Exterior.

E6000® SPRAY ADHESIVE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|-----------------|-----------|-------------|
| 563011 | 4.0 fl oz | Shelf Pk/Bottle | 6 | Translucent |
| 562011 | 8.0 fl oz | Shelf Pk/Bottle | 6 | Translucent |
| 562012 | 8.0 fl oz | Bottle | 6 | Translucent |

| PHYSICAL CHARACTERISTICS | |
|---------------------------------------|---|
| Technology | Water-based formula |
| Density / Viscosity | 1.04 g/mL / <500 cps |
| VOC / Odor / Color | 0.005% / Odorless / Translucent white |
| Dry time | Varies by material and conditions |
| Storage | Store above 40 °F. |
| Freeze/thaw stability | Stable |
| Application temp | Best applied between 50 to 130 °F |
| Service temperature / heat resistance | 30 to 150 °F (-1 to 65 °C) |
| Solvent / Flammable | None / No |
| Shelf life | 2 years – ASTM D-478301 |
| Chemical resistance / pH: | None / 4 - 5 |
| Clean-up | Warm to hot water |
| Flexible / Paintable | Yes / Yes |
| Weight per gallon | 8.66 lbs/gal |
| Water resistance | Cured adhesive has good water resistance |
| UV resistance | Cured adhesive has adequate UV resistance |

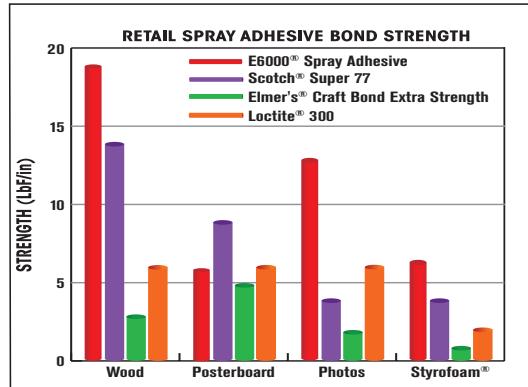

180° Peel Strength Test - ASTM D - 903



SEAL-ALL®

Seal-All is a super strong contact adhesive that sets in 2 - 3 minutes. It is a gas, oil and water resistant "repair kit in a tube"!

SEAL-ALL® AUTOMOTIVE ADHESIVE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 380011 | 1.0 fl oz | Carded | 6 | Clear |
| 380113 | 2.0 fl oz | Carded | 6 | Clear |
| 380115 | 2.0 fl oz | Carded | 72* | Clear |

*Packed 12 cases of 6

WARNING: This product can expose you to chemicals including acetaldehyde which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

PHYSICAL CHARACTERISTICS - uncured material

| | |
|-----------------------|--|
| Solvent | Methyl Ethyl Ketone (flammable) |
| Solids | 35% by weight, 24.3% by volume |
| Density | 7.86 lbs./gal |
| VOC | 410 gram/liter |
| Tack time | 2-3 minutes |
| Full cure time | Thin film: 2-3 hours; Thick film: 3-6 hours |
| Storage | Store in dry area between 50 and 80 °F (10 and 27 °C) |
| Freeze/thaw stability | Stable; allow product to warm to room temperature before using |
| Color | Clear |
| Viscosity | 3,000 cps |
| Shelf Life | 2 years (unopened) |

PHYSICAL CHARACTERISTICS - cured material

| | |
|---------------------|---|
| Hardness | 90 Shore A |
| Tensile strength | 7250 lb/in² (ASTM D-412) |
| Elongation | 25% (ASTM D-412) |
| Temperature range | -40 to 150 °F (-40 to 66 °C) |
| Paint-over time | 8 hours |
| UV resistance | None; paint over for UV resistance |
| Chemical resistance | Excellent to water, oil, gasoline, alcohol, dilute acids and dilute bases |

A premium Wood Filler/Patch product made from real wood! Won't crack or shrink. Can be sanded and drilled without popping.
Easy to stain or paint. Interior or exterior use.




WARNING: This product can expose you to chemicals including wood dust and crystalline silica which are known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

FAMOWOOD® ORIGINAL WOOD FILLER COLORS



Colors are approximate.

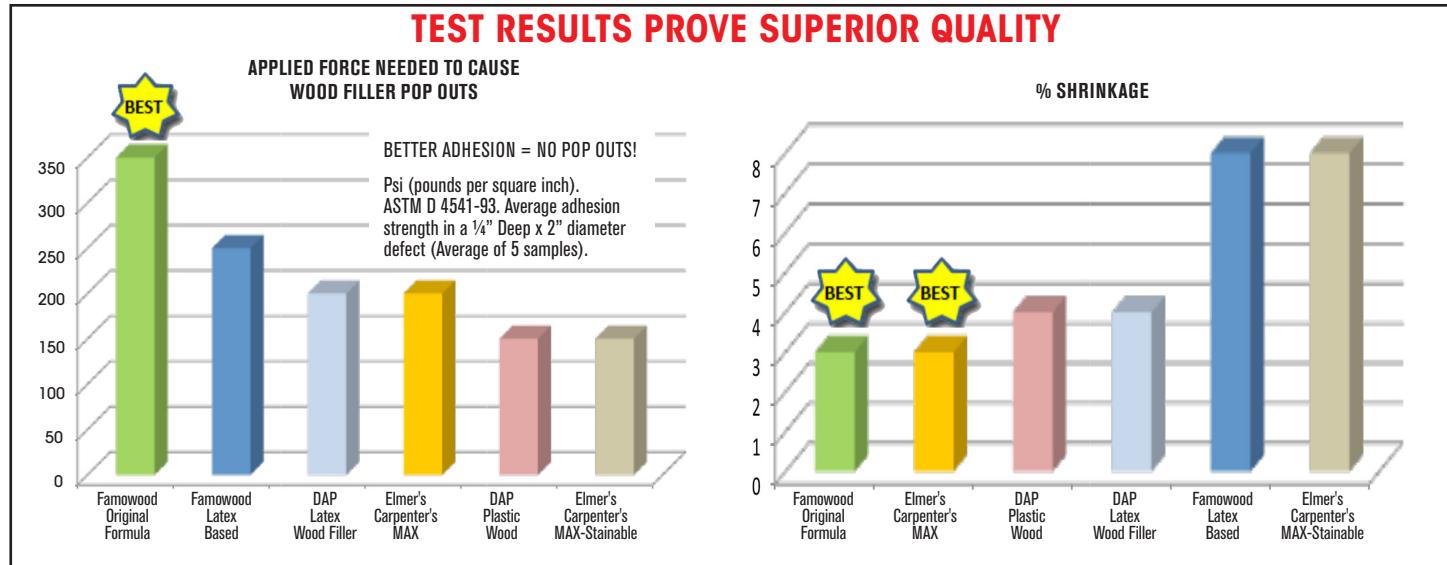

| | 1/4 PINT 6 OZ NET WT CASE PACK: 6 | PINT 24 OZ NET WT CASE PACK: 12 | QUART 45 OZ NET WT CASE PACK: 12 | GALLON - 12 LBS, 10 OZ NET WT CASE PACK: 4 | 5 GALLON CASE PACK: 1 | DRUM |
|----------------|---|---------------------------------------|--|--|-----------------------------|----------|
| Alder | 36141100 | 36021100 | 36011100 | 36001100 | 36051100 | n/a |
| Ash | 36141102 | 36021102 | 36011102 | 36001102 | 36051102 | 36061102 |
| Birch | 36141106 | 36021106 | 36011106 | 36001106 | 36051106 | 36061106 |
| Cedar | 36141108 | 36021108 | 36011108 | 36001108 | 36051108 | n/a |
| Cherry | 36141110 | 36021110 | 36011110 | 36001110 | 36051110 | 36061110 |
| Fir | 36141116 | 36021116 | 36011116 | 36001116 | 36051116 | n/a |
| Mahogany | 36141122 | 36021122 | 36011122 | 36001122 | 36051122 | 36061122 |
| Maple | 36141124 | 36021124 | 36011124 | 36001124 | 36051124 | 36061124 |
| Natural/Tupelo | 36141126 | 36021126 | 36011126 | 36001126 | 36051126 | 36061126 |
| Oak/Teak | 36141128 | 36021128 | 36011128 | 36001128 | 36051128 | 36061128 |
| Pine | 36141130 | 36021130 | 36011130 | 36001130 | 36051130 | 36061130 |
| Red Oak | 36141134 | 36021134 | 36011134 | 36001134 | 36051134 | 36061134 |
| Walnut | 36141142 | 36021142 | 36011142 | 36001142 | 36051142 | 36061142 |
| White | 36141144 | 36021144 | 36011144 | 36001144 | 36051144 | 36061144 |
| White Pine | 36141148 | 36021148 | 36011148 | 36001148 | 36051148 | 36061148 |
| White Glaze | 36141152 | 36021152 | 36011152 | 36001152 | 36051152 | 36061152 |

| Wood Filler | Stain Quality |
|-------------------------------------|---------------|
| FAMOWOOD ORIGINAL FORMULA | Stains Well |
| FAMOWOOD LATEX BASED | Stains Well |
| DAP Plastic Wood | Stains Well |
| Elmer's Carpenter's MAX - Stainable | Stains Well |
| DAP Latex Wood Filler | Resists Stain |
| Elmer's Carpenter's MAX | Resists Stain |

| PHYSICAL CHARACTERISTICS | |
|--------------------------|---|
| Solids | 76% ± 1.0% (by weight) |
| Density | 11.5 - 12.5 lbs/gal |
| Storage | Store between 45 to 85 °F (7 and 29 °C) |
| Freeze/thaw stability | None; do not freeze |
| Vehicle | Nitrocellulose Lacquer |
| Shelf life | 1 year |

WOOD FILLERS

Latex based Wood Filler/Patch. Offers the same outstanding performance of Original Famowood, but has very low odor and can be cleaned up with water!



WARNING: This product can expose you to chemicals including wood dust which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

FAMOWOOD® LATEX WOOD FILLER COLORS



Colors are approximate.

FAMOWOOD® vs. TIMBERMATE™ AND WOODWISE®

BEST

| WOOD FILLER TRAITS | FAMOWOOD® | TIMBERMATE™ | WOODWISE® |
|--------------------|-----------|----------------|-----------|
| Adhesion | BEST | Third | Second |
| Shrinkage | LEAST | Second | Third |
| Ease of Knifing | EASIEST | Hardest | Runniest |
| Cracking | LEAST | Second | Third |
| Fall Out | No | Yes | NO |
| Sandability | BEST | Third | Second |
| Dry Time | SHORTEST | Second | Third |
| Heat Gun Care | Yes | Yes, will burn | Yes |

The most favorable trait is GRAY,
 Middle favorable trait is SOFT GRAY,
 Least favorable trait is WHITE.

| | 1/4 PINT 6 OZ NET WT CASE PACK: 12 | PINT 24 OZ NET WT CASE PACK: 12 | 1 GALLON 12 LBS, 10 OZ NET WT CASE PACK: 4 | 5 GALLON CASE PACK: 1 | DRUM |
|---|--|---------------------------------------|--|--------------------------|----------|
| Birch | 40042106 | 40022106 | 40002106 | 40052106 | 40062106 |
| Cherry/Dark Mahogany | 40042112 | 40022112 | 40002112 | 40052112 | 40062112 |
| Fir/Maple | 40042118 | 40022118 | 40002118 | 40052118 | 40062118 |
| Golden Oak | 40042152 | 40022152 | 40002152 | 40052152 | 40062152 |
| Natural | 40042126 | 40022126 | 40002126 | 40052126 | 40062126 |
| Oak | 40042128 | 40022128 | 40002128 | 40052128 | 40062128 |
| Red Oak | 40042134 | 40022134 | 40002134 | 40052134 | 40062134 |
| Walnut | 40042142 | 40022142 | 40002142 | 40052142 | 40062142 |
| White | 40042144 | 40022144 | 40002144 | 40052144 | 40062144 |
| White Pine | 40042148 | 40022148 | 40002148 | 40052148 | 40062148 |
| DESCRIPTION | SALES PART # | SIZE FILL | RACK HOLDS | | |
| Wood Filler Counter Display (Display only) | 0530005 | Net Wt 6 oz (1/4 Pint) | 55 (10 facings -- 5 deep) | | |

| PHYSICAL CHARACTERISTICS | |
|--------------------------|--|
| Solids | 82% ± 2.0% (by weight) |
| Density | 15.0 - 16.0 lbs/gal |
| Storage | Store between 45 to 85 °F (7 to 29 °C) |
| Freeze/thaw stability | Stable three to five freezes; allow product to warm to room temperature before using |
| Color(s) | Birch, Cherry/Dark Mahogany, Fir/Maple, Golden Oak, Natural, Oak, Red Oak, Walnut, White, White Pine (10 colors) |
| Shelf life | 1-1/2 years |

Wood-Tex®

A resin-based wood filler, Wood-Tex Wood Filler has been used in plywood and furniture industries for years because of its smooth application properties. Used to repair defects in plywood, furniture, laminated beams, cabinet work and other woodworking applications. It molds like putty and is consistent, uniform, waterproof and fast-setting with minimal shrinkage. Made with genuine wood flour and can be sanded, stained, sawed, planed or drilled like real wood.



WARNING: This product can expose you to chemicals including wood dust, crystalline silica, titanium dioxide and carbon black which are known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov

WOOD-TEX® WOOD FILLER COLORS



PHYSICAL CHARACTERISTICS

| | |
|------------------------------|--|
| Solids | 75% ± 1.0% (by weight) |
| Density | 12 - 13 lbs/gal |
| Viscosity | 440,000 to 550,000 cps |
| Storage | Store between 45 to 85 °F (7 to 29 °C) |
| Vehicle | Nitrocellulose Lacquer |
| Volatile content | 12.69% ± 0.07% (VOC 215 g/L) |
| Freeze/thaw stability | None; do not freeze |
| Color(s) | Cherry/Dark Mahogany, Fir/Maple, Natural/Ash, Red Oak, Walnut, White Pine (6 colors) |
| Shelf life | 1 year |

| | PINT NET WT 1.25 LBS (0.567 kg) CASE PACK: 12 | QUART NET WT 2.50 LBS (1.130 kg) CASE PACK: 4 | 1 GALLON NET WT 10.0 LBS (4.54 kg) CASE PACK: 4 | 5 GALLON NET WT 57.5 LBS (26.14 kg) CASE PACK: 1 | DRUM |
|----------------------|---|---|---|---|----------|
| Cherry/Dark Mahogany | 34021012 | n/a | n/a | 34051012 | n/a |
| Fir/Maple | 34021018 | 34011018 | 34001018 | 34051018 | 34061018 |
| Natural/Ash | 34021026 | 34011026 | 34001026 | 34051026 | n/a |
| Red Oak | 34021034 | 34011034 | 34001034 | 34051034 | n/a |
| Walnut | 34021042 | n/a | n/a | 34051042 | n/a |
| White Pine | 34021048 | 34011048 | 34001048 | 34051048 | n/a |



COATINGS



A pour-on 2-part epoxy coating that leaves a high gloss finish. Ideal for tables, bar tops, benches and hundreds of other projects. Excellent for protecting and preserving!

GLAZE COAT® HIGH GLOSS COATING

| Sales Part # | Size / Fill | Case Pack | Color |
|--------------|--------------|-----------|-------|
| 5050060 | 1 Pint Kit | 6 | Clear |
| 5050080 | 1 Quart Kit | 4 | Clear |
| 5050110 | 1 Gallon Kit | 2 | Clear |



| PRODUCT BENEFITS | |
|-------------------------|--|
| Self-leveling | Minimal spreading |
| High build epoxy | Just one pour equals 70 coats of varnish |
| Versatile | May be used on any non-waxy substrate |
| Easy to Use | No measuring errors; easy 1:1 mixing ratio |
| Shelf life | 1 year |

| PHYSICAL CHARACTERISTICS | |
|--------------------------------|--|
| Solids | 100% |
| Non-volatile content | 97% |
| Tack free time | 12 hours @ 70 °F |
| Cure time | 72 hours (depending on temperature) |
| Mixing ratio | 1 to 1 volume |
| Pot life (working time) | 15 minutes @ 70 °F |
| Color | Clear |
| Elongation | 15% |
| Tensile strength | 450 psi |
| Tear strength | 200 psi |
| Shear strength | 200 psi |
| Compressive strength | 800 psi |
| Compressive strain | 75% |
| Shore hardness | 85D |
| Weight/gallon | Part A (Resin): 9.63 / Part B (Hardener): 7.93 @ 77 °F (ASTM D-1475) |



A marine epoxy sealer designed for extra fast, extra durable repairs and protection. Impact resistant, abrasion resistant and waterproof. Ideal for repairing/bonding/protecting fiberglass, wood aluminum and more.

AMAZING GOOP® COAT-IT® EPOXY SEALER

| Sales Part # | Size / Fill | Case Pack | Color |
|--------------|-------------|-----------|-------|
| 5400040 | 2.0 lb Kit | 2 | Gray |
| 5400060 | 8.0 lb Kit | 2 | Gray |

| PHYSICAL CHARACTERISTICS | |
|------------------------------------|---|
| Coverage 2 lb kit | Covers approximately 20 sq. ft. depending upon the porosity of the surface and thickness applied. |
| Coverage 8 lb kit | Covers approximately 80 sq. ft. depending upon the porosity of the surface and thickness applied. |
| Heat deflection temperature | 116°F (ASTM D648-264 psi) |
| Bond strength | 2,020 psi (mild steel to mild steel) |
| Elongation | 1.35% |
| Flexural strength | 8,460 psi |
| Flexural modulus | 319,000 psi |
| Tensile strength | 6,180 psi |
| Tensile modulus | 457,000 psi |
| Barcol hardness (GY1-935) | 79 |
| Lubricity | High lubricity in marine applications - slides over rocky or abrasive surfaces |



All purpose adhesive designed to adhere to virtually any surface so you can **FIX WHAT OTHER GLUES SIMPLY CAN'T®**.
Forms a permanent bond, has extreme flexibility and is paintable. Use indoors or out.



AMAZING GOOP® ALL-PURPOSE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 140231 | 1.0 fl oz | Carded | 6 | Clear |
| 140232 | 1.0 fl oz | Carded | 12 | Clear |
| 140233 | 1.0 fl oz | Carded | 72* | Clear |
| 140240 | 1.0 fl oz | Bulk | 12 | Clear |
| 140211 | 3.7 fl oz | Carded | 6 | Clear |

*Packed 12 cases of 6

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



AMAZING GOOP® PLUMBING

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 150011 | 3.7 fl oz | Carded | 6 | Clear |

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

AMAZING GOOP PHYSICAL CHARACTERISTICS

| Uncured material | |
|----------------------------|--|
| Solvent | Toluene, Petroleum distillates (flammable) |
| Solids | AMAZING GOOP: 45% by weight, 42% by volume |
| Density | AMAZING GOOP: 7.4 lbs/gal |
| VOC | AMAZING GOOP: 475 gram/liter |
| Tack time / Full cure time | 2 - 3 minutes / Thick film: 48-72 hours |
| Storage | Store in dry area between 50 to 80 °F (10 to 27 °C) |
| Freeze/thaw stability | Stable; allow product to warm to room temperature before using |
| Viscosity | AMAZING GOOP: 100,000 cps |
| Shelf Life | 2 years (unopened) |
| Cured material | |
| Chemical resistance: | Excellent to water, dilute bases |
| UV resistance: | Amazing GOOP All-Purpose, Household, Plumbing: None. Paint-over for UV resistance. Amazing GOOP RV, Marine, Automotive: Yes |
| Hardness / Elongation | 80 Shore A / 900% (ASTM D-412) |
| Dielectric strength: | 400 V/mil (ASTM D-149) |
| Tensile strength: | 3800 lb/in ² (ASTM D-412) |
| Paint-over time: | 24 hours |
| Service Temperature | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. |

*Proposition 65: this product contains no Prop 65 listed materials as identified by the State of California.



AMAZING GOOP® HOUSEHOLD

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 130011 | 3.7 fl oz | Carded | 6 | Clear |

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



AMAZING GOOP® MARINE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|-----------|-----------|-------|
| 170011 | 3.7 fl oz | Carded | 6 | Clear |
| 172012 | 10.2 fl oz | Cartridge | 12 | Clear |

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



AMAZING GOOP® AUTOMOTIVE

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 160011 | 3.7 fl oz | Carded | 6 | Clear |

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



AMAZING GOOP® AUTOMOTIVE & RV

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 161021 | 2.0 fl oz | Carded | 6 | Clear |

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.



SNIP-TIP APPLICATORS

| Sales Part # | Size / Fill | Case Pack |
|--------------|----------------------------------|-----------|
| 0499210-B | Fits 3.7 fl oz tubes | 100/bag |
| 0499910-B | Fits 1.0 fl oz / 2.0 fl oz tubes | 100/bag |



ADHESIVES



AMAZING GOOP® II MAX

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 142100 | 2.0 fl oz | Carded | 6 | Clear |

WARNING: This product can expose you to chemicals including perchloroethylene which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.



AMAZING GOOP® TRIM REPAIR

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 144100 | 1.0 fl oz | Carded | 6 | Clear |

WARNING: This product can expose you to chemicals including perchloroethylene which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

| AMAZING GOOP II MAX & TRIM REPAIR PHYSICAL CHARACTERISTICS - uncured material | |
|---|--|
| Solids | 30% by wt: 40% by volume |
| Density / VOC | 11.0 +/-0.1 lbs/gal / 2.0 grams/liter |
| Tack time / Full cure time | 5 minutes / 24 hrs. (thin film); 48-72 hrs. (thick film) |
| Storage | Store between 50 to 80 °F (10 to 27 °C) |
| Freeze/thaw stability | Stable, allow product to warm to room temperature before using |
| Viscosity | Amazing GOOP II Max - 100,000 cps Amazing GOOP Trim Repair - 50,000 cps |
| Shelf Life | 2 years (unopened) |
| Hardness / Elongation (ASTM D-412) | 80 Shore A / 900% |
| Tensile strength (ASTM D-412) | 3,500 lb/in ² |
| Cured material | |
| Chemical resistance: | Excellent to water, dilute acids & dilute bases |
| Temperature range: | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. |
| UV resistance: | Amazing GOOP II Max - Yes Amazing GOOP Trim Repair - None paint-over for UV resistance. |
| Dielectric strength: (ASTM D-149) | 400 V/mil. This is the maximum voltage that can be applied to a given material without causing it to break down. |



Repair & protect boots, shoes, gloves & more – permanently! **Rebuild, Protect and Repair.**

Shoe Goo®

| Sales Part # | Size / Fill | Type | Case Pack | Color |
|--------------|-------------|--------|-----------|-------|
| 110400 | 0.18 fl oz | Bulk | 500 | Clear |
| 110231 | 1.0 fl oz | Carded | 6 | Clear |
| 110233 | 1.0 fl oz | Carded | 72* | Clear |
| 110011 | 3.7 fl oz | Carded | 6 | Clear |
| 110212 | 3.7 fl oz | Carded | 12 | Black |

*Packed 12 cases of 6

WARNING: This product can expose you to chemicals including toluene which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.

SHOE GOO PHYSICAL CHARACTERISTICS

Uncured material

| | |
|-----------------------------------|--|
| Solvent | Toluene, Petroleum distillates (flammable) |
| Solids | SHOE GOO: 46% by weight, 42% by volume |
| Density | SHOE GOO: 7.5 lbs/gal |
| VOC | SHOE GOO: 466 gram/liter |
| Tack time / Full cure time | 2 - 3 minutes / Thick film: 48-72 hours |
| Storage | Store in dry area between 50 to 80 °F (10 to 27 °C) |
| Freeze/thaw stability | Stable; allow product to warm to room temperature before using |
| Viscosity | SHOE GOO: 170,000 cps |
| Shelf Life | 2 years (unopened) |

Cured material

| | |
|------------------------------|--|
| Chemical resistance: | Excellent to water, dilute bases |
| UV resistance: | None paint-over for UV resistance. |
| Hardness / Elongation | 80 Shore A / 900% (ASTM D-412) |
| Dielectric strength: | 400 V/mil (ASTM D-149) |
| Tensile strength: | 3800 lb/in ² (ASTM D-412) |
| Paint-over time: | 24 hours |
| Temperature range: | Ideal application temperature range is 50 to 90 °F (10 to 32 °C). However, fully cured adhesive can withstand temperatures from -40 to 180 °F (-40 to 82 °C) intermittently. |

*Proposition 65: this product contains no Prop 65 listed materials as identified by the State of California.

INDUSTRIES SERVED



INDUSTRIAL OEM

(Furniture & cabinet manufacturing, rubber & wood flooring installation and repair, garment manufacturing, trailer manufacturing, plant maintenance, hotel/apartment maintenance, fleet maintenance, etc)

INDUSTRIAL DISTRIBUTORS/ SUPPLY HOUSES

(Plastic, rubber & hose suppliers, wood flooring suppliers, trailer maintenance, HVAC suppliers, etc)

HARDWARE/ HOME IMPROVEMENT STORES

CRAFT

MASS MERCHANTS

FARM & RANCH

EXTREME VALUE RETAILERS

CONVENIENCE-STORES

AUTOMOTIVE

SHOE CARE

MARINE

ORDER INFORMATION (800) 349-4667 • EMAIL: orders@eclecticproducts.com

TECH SUPPORT (800) 767-4667 • EMAIL: info@eclecticproducts.com

602 05-2019