

**"Electronic warning systems
are not as effective in
preventing burglaries
when used without a
strong physical barrier."**

A strong, physical deterrent is the best way to prevent today's criminals from breaking in. Modern criminals are fast and efficient and often require no longer than three minutes to complete their burglary. This means electronic alarm systems are not as effective when used without a strong physical deterrent.

Exit Security Bars are manufactured using durable steel and designed for easy installation and easy operation on a daily basis.

Manufacturer's Warranty

A one-year warranty for defects in materials or workmanship covers all products of Exit Security, Inc., provided defective product/part is returned within one year of sale. Manufacturer will not be responsible for damage from improper use or modification to product. Improper installation of product voids warranty.



Patent No. 4,667,992

Exit Security, Inc.

P.O. Box 8276 • Fort Worth, TX 76124


TOLL FREE (800) 446-6775

Shipping Hotline (817) 222-0303

Fax (817) 831-6063


www.exitsecurity.com

YOUR FIRST LINE OF DEFENSE AGAINST FORCED ENTRY

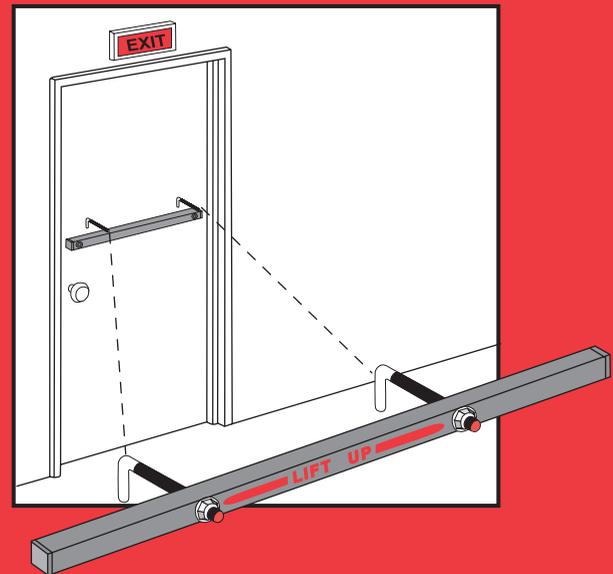

A TOP-QUALITY STEEL SECURITY BAR

HOOK-ON SERIES

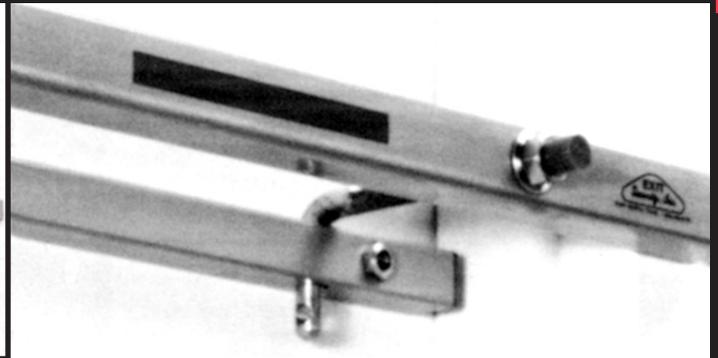

A heavy-duty security bar, ideal for many commercial exits regardless of door size; Designed for single or double doors, in swinging or out-swinging functions. This bar features a unique, patented, hook-on/lift-off operation that is easy to use and emergency sensitive. Use of a padlock is optional to secure the bar in bolted or unbolted positions. (Customers should always comply with local building codes) Each pack includes a storage bracket and a caution sign. Extra long L-Bolts are available for special applications.

CONSTRUCTION: Major parts are manufactured of 16 gauge square steel tubing (1 inch and 1 1/4-inch); "L" bolts are 6 1/2 inches in length, with zinc chromate finish. 12 1/2" L Bolts are available SB-P1-1015.

FINISH: The bar(s) are finished with gray electrostatic powder epoxy baked on to a semi-gloss finish; Graphics are silk screened of red epoxy; Finishes are test-proven protection against corrosion, including salt corrosion.

INSTALLATION: No door or door frame preparation is required prior to installation; No special tools are required; Complete instructions are provided.

STANDARD MODELS:

SB-01-0036 outswing, single 36" door

SB-01-0042 outswing, single 42" door

SB-01-0048 outswing, single 48" door

SB-01-UV48 outswing universal, single door, up to 48" opening

SB-01-0060 outswing , double doors, 60" opening

SB-01-0072 outswing , double doors, 72" opening

SB-01-UV72 outswing universal , double doors, up to 72" opening

SB-03-UV48 inswing universal , single door, up to 48" opening, hollow metal frame

SB-03-UV72 inswing universal , double doors, up to 72" opening, hollow metal frame

SB-07-UV36 inswing universal , single door, up to 36" opening, wood frame and studs

SB-07-UV72 inswing universal, double doors, up to 72" opening, wood frame and studs

