



## Product Specifications

[www.ezconcept.com](http://www.ezconcept.com)



As manufacturers of the world renowned EzyJamb door jamb systems, EZ Concept's openings and finishings products produce minimalistic flush finishes by eliminating trims and traditional timber systems for commercial, residential and industrial interiors.

## EXPERIENCE EZCONCEPT

### Opening Products

#### **EzyJamb**

Page 06 | The Flush Finish Door Jamb System

#### **RocYork**

Page 22 | Door Hardware

#### **CavKit**

Page 28 | Pocket Door Trim Kit

#### **SlideSet**

Page 30 | The Flush Finish Pocket Door Solution

#### **AccessDor**

Page 34 | Smooth Wall to Access Panel Transitions

### Finishing Products

#### **EzyPelmet**

Page 38 | Economical Recessed Window Pelmet Systems

#### **EzyCap**

Page 40 | Cased Opening and Wall End Solution

#### **FastCap**


Page 41 | Custom Finishing and Capping Made Easy

#### **EzyReveal**

Page 42 | Premium Trim Free Window Reveals

#### **AluBase**

Page 44 | Anodized Aluminium Base Board Trim



# Opening Products






# EzyJamb

## EZC | Classic Adjust Door Frame



EzyJamb® Classic Adjust - EZC is a split type door jamb system that creates inconspicuous clean lines to complete the contemporary look of architectural spaces. The two-piece jamb is made specific to your wall throat, yet has 3/8" +/- field adjustments to allow for inconsistencies at install.



## Product Details

EZYJAMB EZC CLASSIC ADJUST DOOR FRAME FOR 1-3/8 AND 1-3/4 DOORS			
Material	20ga Galvanneal		
Max Width	3'-0" (Single)	6'-0" (Double)	(Custom sizes available on request)
Max Height	9'-0"		(Custom sizes available on request)
Wall Throat	3-1/2" - 8-7/8"		(Custom sizes available on request)
Fire Rating	90 minutes - Up to 3080 single, 6080 double		
Hinge Options	<div><div><div>1 Concealed Hinges</div><div>2 Mortise Hinges</div><div>3 Non-Mortise Hinges</div></div><div><div>1</div><div>2</div><div>3</div></div><div></div></div>		

## Preparation Options

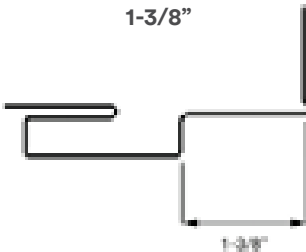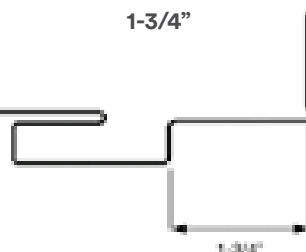	Strike Options	T-Strike DeadBolt	
	Hinge Options	Non-Mortise Hinge RocYork RY-45 / RY-60	
	Strike Options	T-Strike ASA Strike DeadBolt	NoHa Flushbolt
	Hinge Options	4" Mortise Hinge RocYork RY-45 / RY-50, RY-60 / RY-80 Soss 216 / 416	Closer Options Parallel Arm Reinforcement

## Specification Details

- |                  |                           |                 |                  |
|------------------|---------------------------|-----------------|------------------|
| - Frame Type     | - Frame Height            | - Strike Type   | - Hinge Type     |
| - Door Thickness | - Finished Wall Thickness | - Strike Height | - Hinge Quantity |
| - Frame Width    | - Fire Rating             | - Frame Handing |                  |

EX. EZC - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RY80 - 3

### Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

### Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.


### Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request. Expedited orders can be dispatched within 7-10 working days from receipt of order. A minimum charge of \$150 or 40% total order cost, whichever is greater is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

### Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

## North America Door Handing

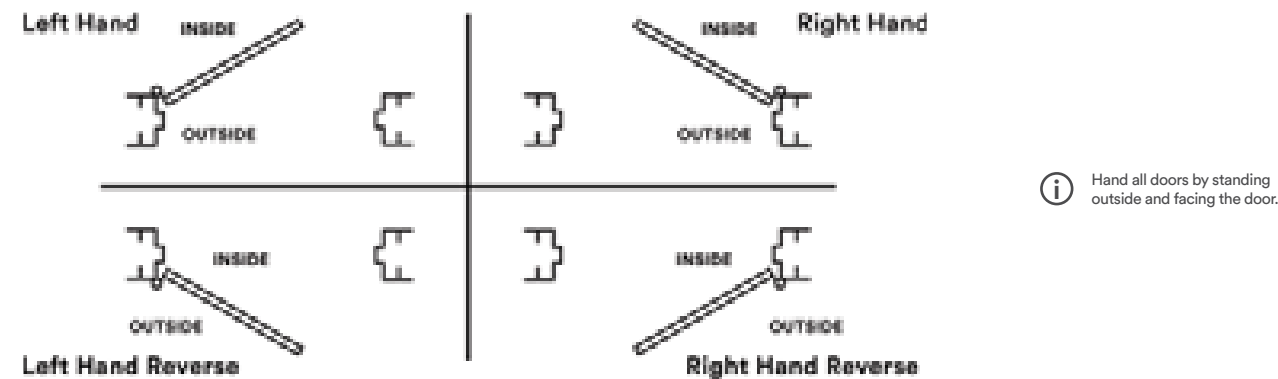

EzyJamb | EZC Classic Adjust Door Frame


# Installation Instructions

## Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.


**i** When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

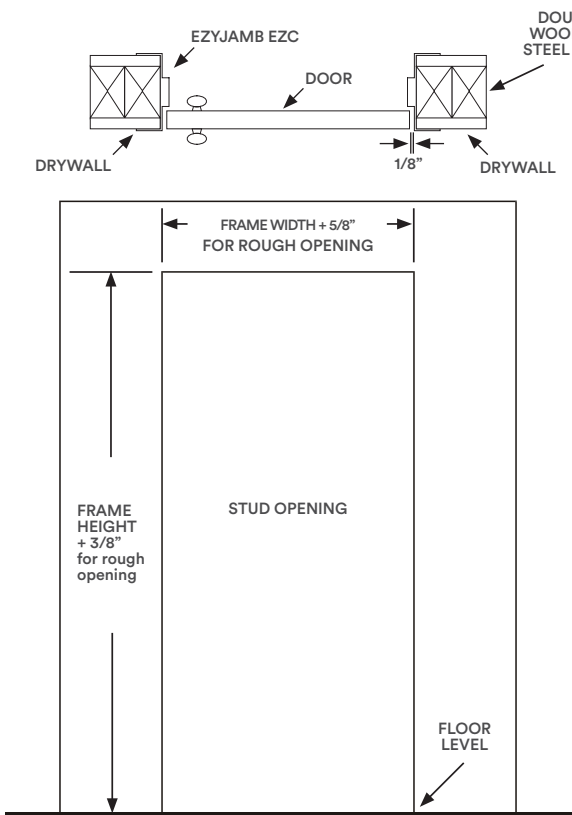


## Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See *Detail 'B' and 'C'*.


Double screw all ends as *Detail D*. and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.

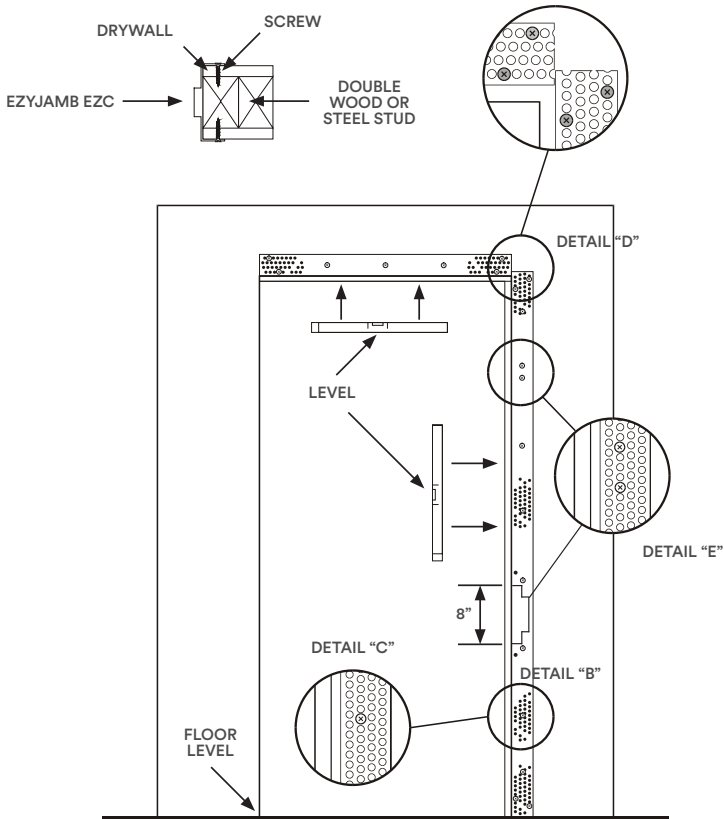


## Step 2A | Head Installation



Head joiners as inserted in jamb.



Locate head into joiner and make flush with jamb so the head joiner is not seen.




Remove the remaining head joiner out of the strike jamb into the end of the head (as shown) to receive the strike jamb.

EzyJamb | EZC Classic Adjust Door Frame

# Installation Instructions

## Step 3

Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

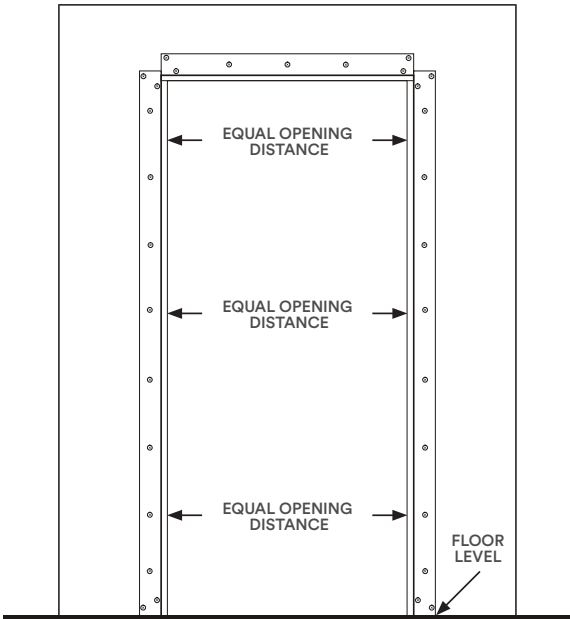


## Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

All the corners must be paper taped and mudded in as *Detail F*.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

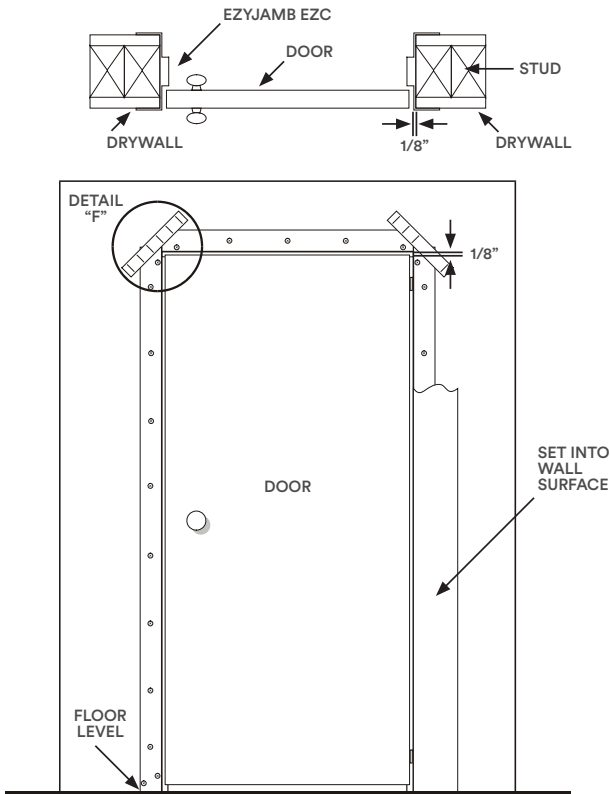

## Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

[www.ezconcept.com/installation](http://www.ezconcept.com/installation)









# EzyJamb

## SRC | Single Rabbet Door Frame

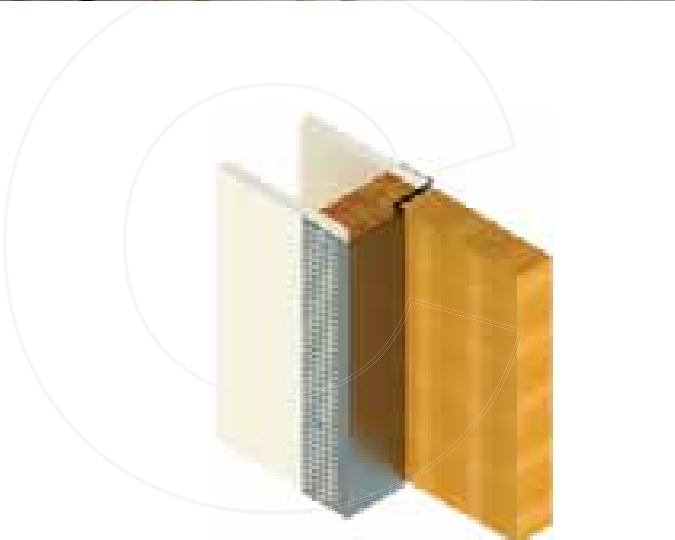

Give your project a clean cut trim-free edge with the EzyJamb Single Rabbet – SRC door frame. This one-piece frameless door jamb is made custom to perfectly suit your wall thickness for a flush finish. The premium design of the EzyJamb SRC provides a smooth transition from one side of the door jamb allowing a minimalistic sophistication in apartments, homes and commercial buildings.



## Product Details

EZYJAMB SRC SINGLE RABBIT DOOR FRAME - FOR 1-3/4 AND 2-1/4 DOORS			
Material	18ga Galvanneal		
Max Width	3'-6" (Single)	6-0' (Double)	(Custom sizes available on request)
Max Height	10-0'		(Custom sizes available on request)
Wall Throat	3-3/4" - 9-7/8" in 1/8" increments		(Custom sizes available on request)
Fire Rating	Up to 90 minutes		
Hinge Options	<div><div><div>1 Concealed Hinges</div><div>2 Mortise Hinges</div><div>3 Pivot Hinges</div></div><div><div>1</div><div>2</div><div>3</div></div><div></div></div>		

## Preparation Options

	Strike Options	T-Strike ASA Strike DeadBolt HES 8300	Rim Reinforcement No Ha FlushBolt	Pivot Options	Rixson Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 018 ABH Intermediate Pivot 019
	Hinge Options	4-1/2" Mortise Hinge RocYork RY-60 / RY-80 / RY-120 Soss 216 / 218 / 418 Tectus 340 / 527 / 540			LCN 3130 Dorma ITS96 RocYork RYCC60950 PA Reinforcement RocYork RYSC801100
	Power Switch	EPT Power Transfer Door Position Switch			GJ 100 & 400 Series
	Strike Options	T-Strike ASA Strike DeadBolt HES 8300	Rim Reinforcement No Ha FlushBolt	Pivot Options	Rixson Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 018 ABH Intermediate Pivot 019
	Hinge Options	4-1/2" Mortise Hinge RocYork RY-60 / RY-80 / RY-120 Soss 218 / 418 Tectus 340 / 527 / 540			LCN 3130 Dorma ITS96 RocYork RYCC60950 PA Reinforcement RocYork RYSC801100
	Power Switch	EPT Power Transfer Door Position Switch			GJ 100 & 400 Series

## Specification Details

- Frame Type

- Door Thickness

- Frame Width
- Frame Height

- Finished Wall Thickness

- Fire Rating
- Strike Type

- Strike Height

- Frame Handing
- Hinge Type

- Hinge Quantity

EX. SRC - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RY80 - 3

### Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

### Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.


### Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request. Expedited orders can be dispatched within 7-10 working days from receipt of order. A minimum charge of \$150 or 40% total order cost, whichever is greater is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

### Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

## North America Door Handing

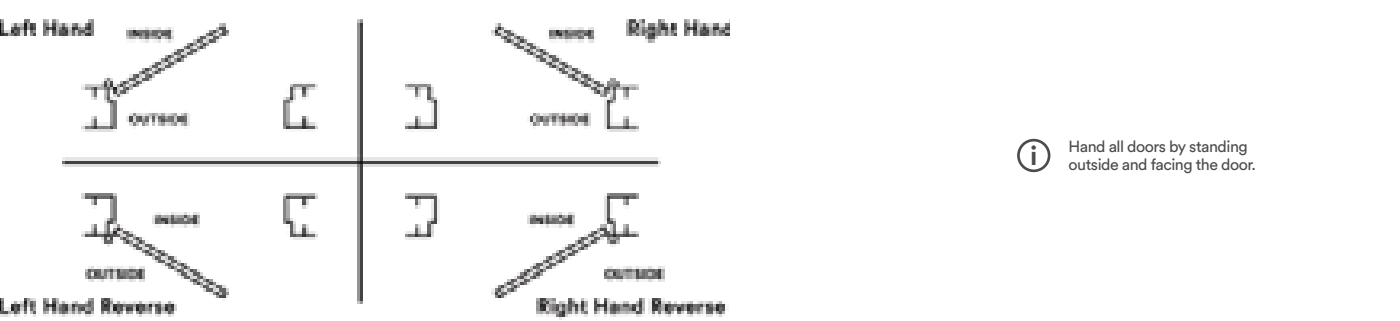

EzyJamb | SRC Single Rabbet Door Frame


# Installation Instructions

## Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 20 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.


**i** When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

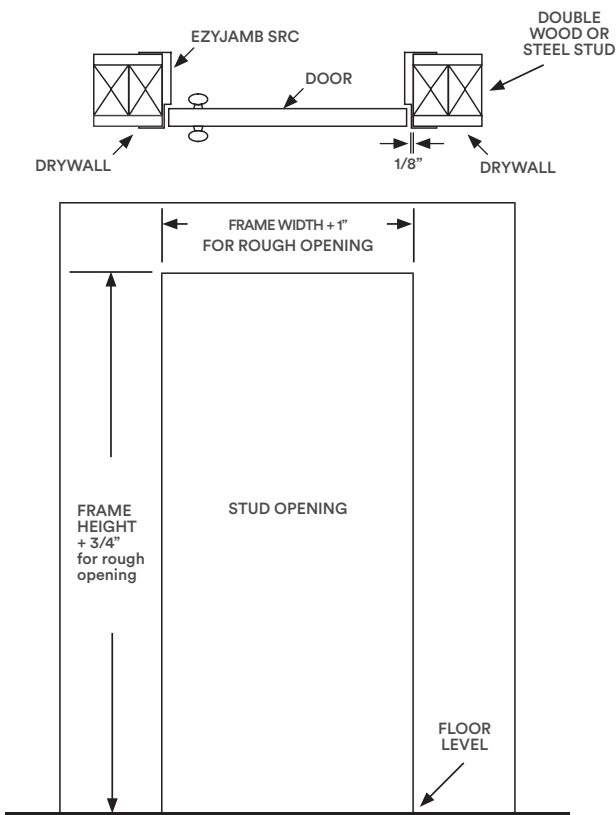


## Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See *Detail 'B' and 'C'*.


Double screw all ends as *Detail D*. and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.

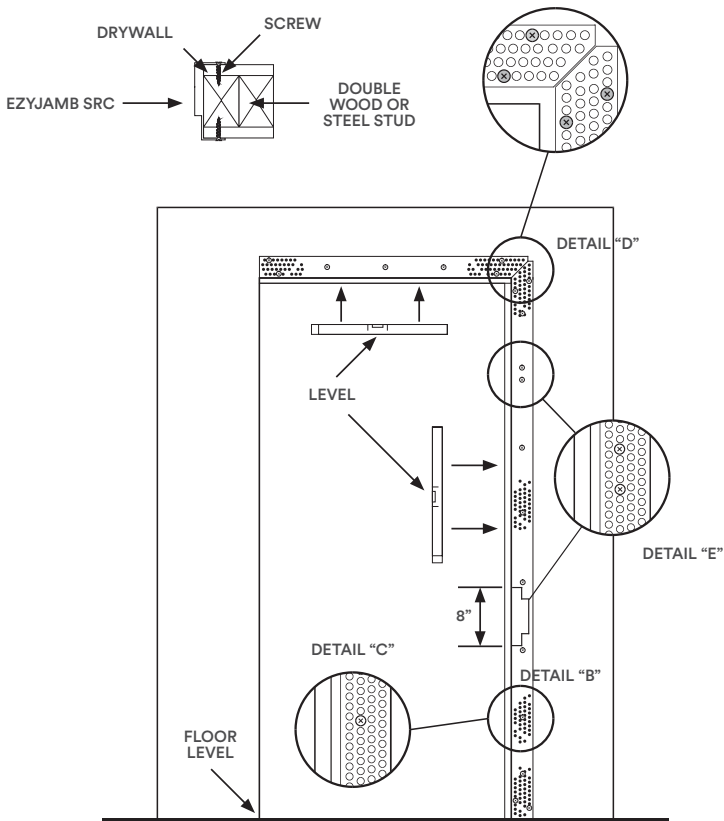

## Step 2A | Head Installation

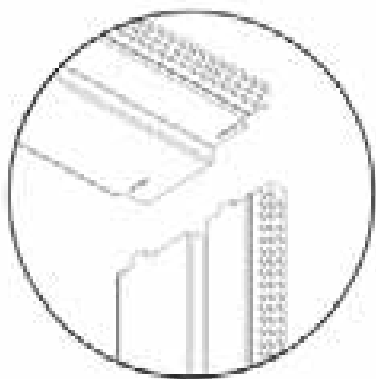

Locate fixing tabs to header.

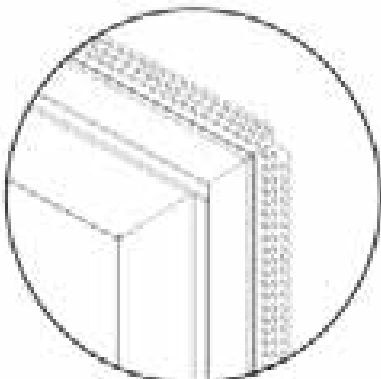


Corner Detail Completed

EzyJamb | SRC Single Rabbet Door Frame

# Installation Instructions

## Step 3


Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

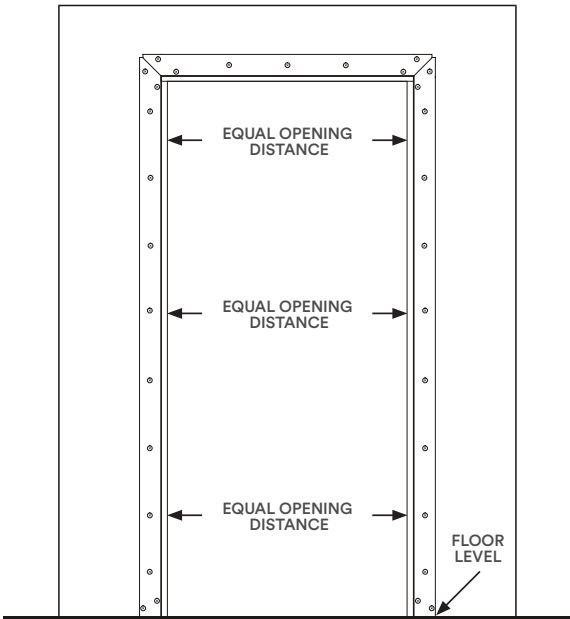

## Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

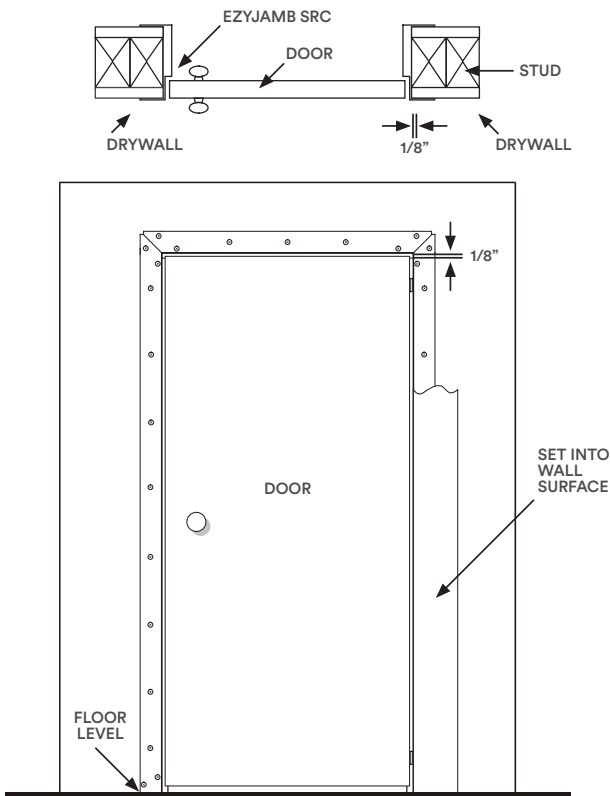

## Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

[www.ezconcept.com/installation](http://www.ezconcept.com/installation)










# EzyJamb

## ISD | Inswing Door Frame


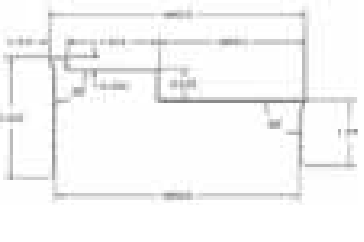
EzyJamb Inswing Door - ISD is the ultimate door jamb system to achieve a seamless look in hallways and corridors. The EzyJamb ISD frame is suitable for applications that require the door to open inwardly from the flush side of the door, for a clean line along the wall face. The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing and is available with various hinge options.



### Product Details

EZYJAMB ISD INSWING DOOR FRAME - FOR 1-3/4 AND 2-1/4 DOORS			
Material	18ga Galvanneal		
Max Width	3'-6" (Single)	6'-0" (Double)	(Custom sizes available on request)
Max Height	10'-0"		(Custom sizes available on request)
Wall Throat	3-3/4" - 9-7/8" in 1/8" increments		(Custom sizes available on request)
Fire Rating	Pending		
Hinge Options	<div><div><div>1 Concealed Hinges</div><div>2 Mortise Hinges</div><div>3 Pivot Hinges</div></div><div><div>1</div><div>2</div><div>3</div></div><div></div></div>		

### Preparation Options

	Strike Options	T-Strike ASA Strike DeadBolt		
	Hinge Options	4" Mortise Hinge RocYork RY-60	(8'0" Max Height) (7'0" Max Height)	
	Strike Options	T-Strike ASA Strike DeadBolt HES 8300 Electrical Strike	NoHa Flushbolt	Pivot Options Rixson Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 018 ABH Intermediate Pivot 019
	Hinge Options	4-1/2" Mortise Hinge RocYork RY-80 / RY-120 Soss 218 / 418 Tectus 340 / 540		Closer Options LCN 3130 Dorma ITS96 RocYork RYCC60950
	Power Switch	EPT Power Transfer Door Position Switch		

### Specification Details

- Frame Type

- Door Thickness

- Frame Width
- Frame Height

- Finished Wall Thickness

- Fire Rating
- Strike Type

- Strike Height

- Frame Handing
- Hinge Type

- Hinge Quantity

EX. ISD - 2.25 - 3-0' - 7-0' - 4-7/8 - N/A - ASA-38" - RH - RY80 - 3

#### Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

#### Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.


#### Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request. Expedited orders can be dispatched within 7-10 working days from receipt of order. A minimum charge of \$150 or 40% total order cost, whichever is greater is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

#### Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

### North America Door Handing

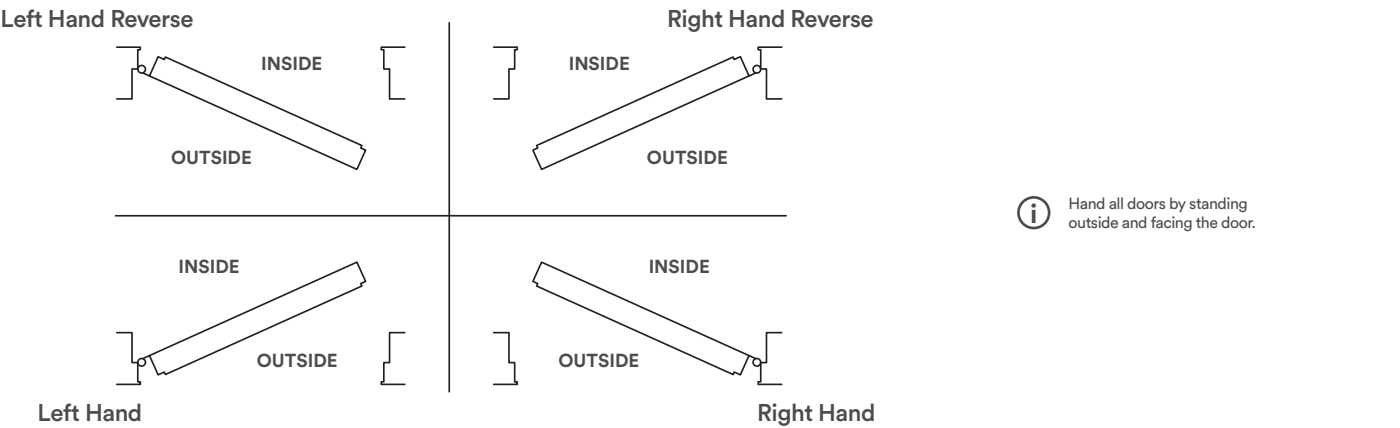



EzyJamb | ISD Inswing Door Frame


Installation Instructions

Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.


**i** When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

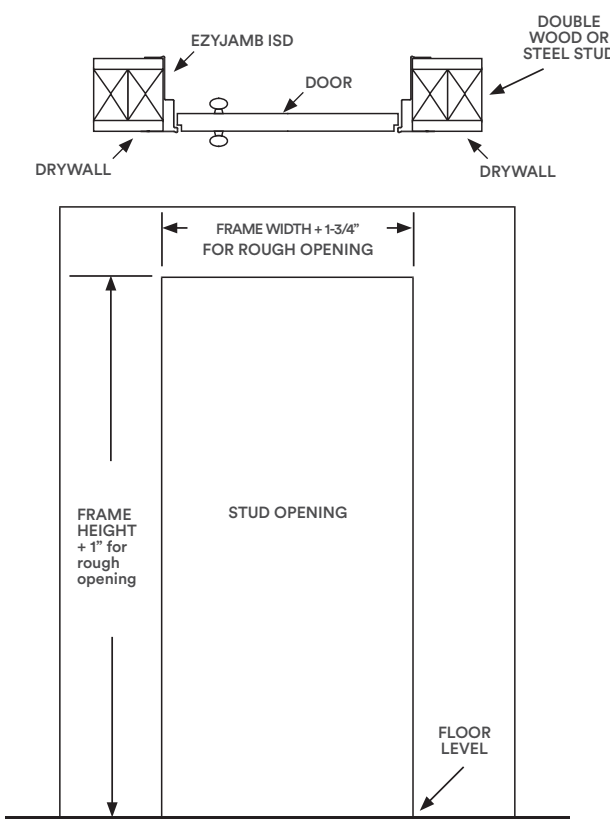


Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See *Detail 'B' and 'C'*.


Double screw all ends as *Detail D*. and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.

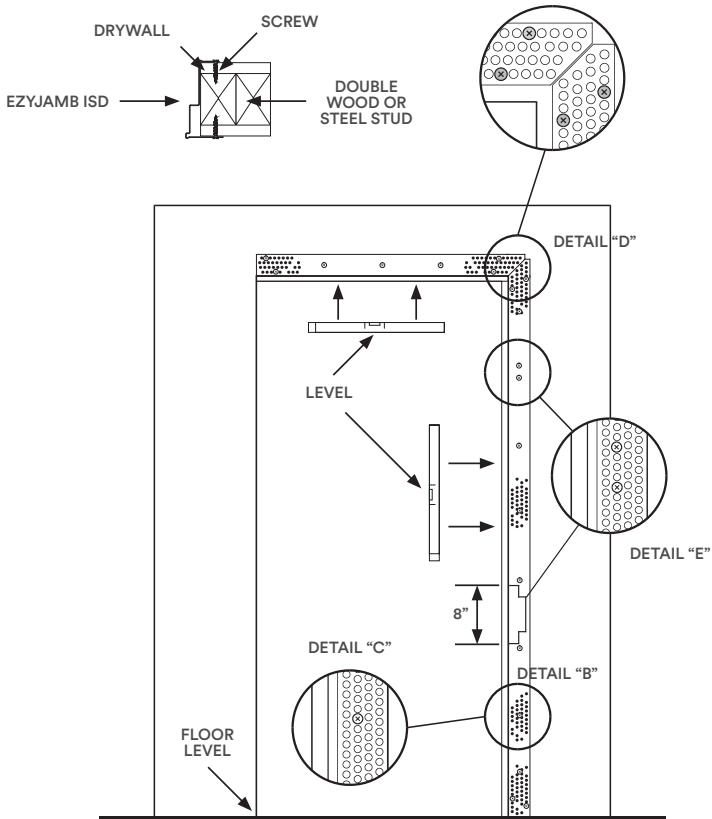

Step 2A | Head Installation



Locate fixing tabs to header.




Double screw all ends as Detail D.

EzyJamb | ISD Inswing Door Frame

Installation Instructions

Step 3


Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

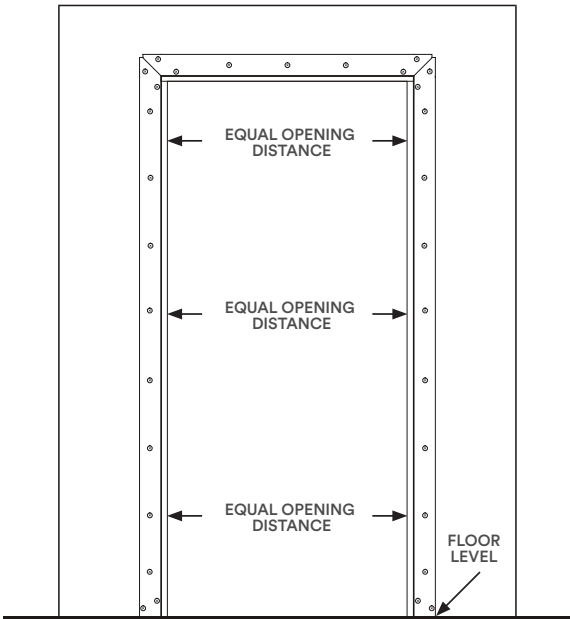

Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

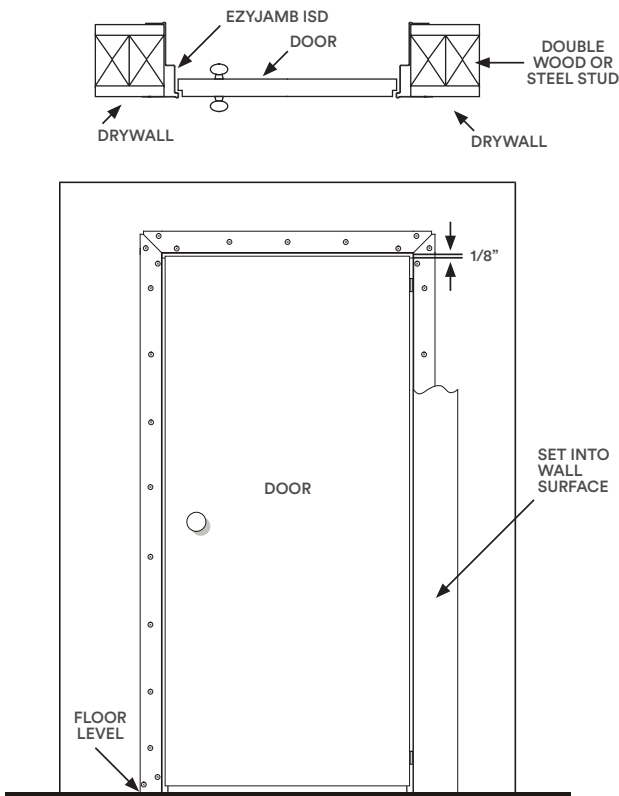

Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

[www.ezconcept.com/installation](http://www.ezconcept.com/installation)






# EzyJamb

## DRC | Double Rabbet Door Frame




The latest innovation in EzyJamb® Flush Finish Door Jambs, the Double Rabbet EzyJamb® – DRC allows for single or double doors to be hung in the fire-rated Jamb creating a modern look for interconnecting hotel rooms.

This modern approach to hotel door jambs complements discerning hotel interiors where a premium finish is required in all areas.


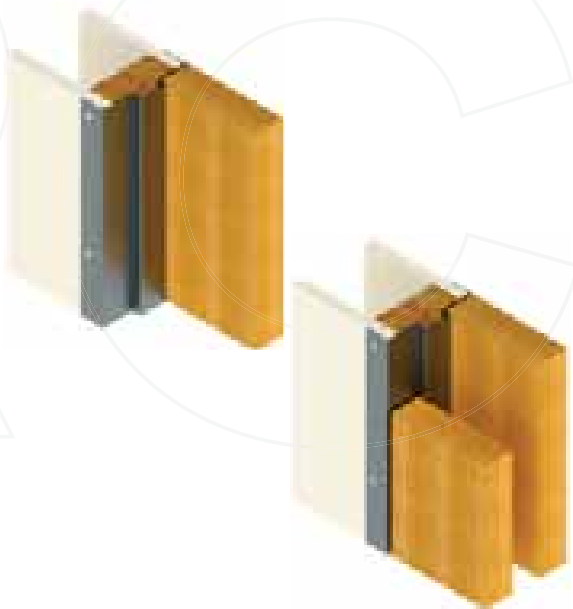


## Product Details

### EZYJAMB DRC DOUBLE RABBET DOOR FRAME - FOR 1-3/4 AND 2-1/4 DOORS

Material	18ga Galvanneal		
Max Width	3'-6" (Single)	6-0' (Double)	(Custom sizes available on request)
Max Height	10-0' (Custom sizes available on request)		
Wall Throat	4-1/2" - 9-7/8" in 1/8" increments (For 1-3/4 Doors) 5" - 1-1/2" - 9-7/8" in 1/8" increments (For 2-1/4 Doors) (Custom sizes available on request)		
Fire Rating	Up to 90 minutes		
Hinge Options	<div><div><div>1 Concealed Hinges</div><div>2 Mortise Hinges</div><div>3 Pivot Hinges</div></div><div><div>1</div><div>2</div><div>3</div></div><div></div></div>		

## Preparation Options

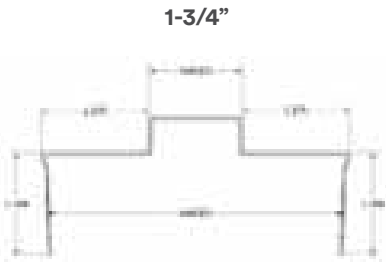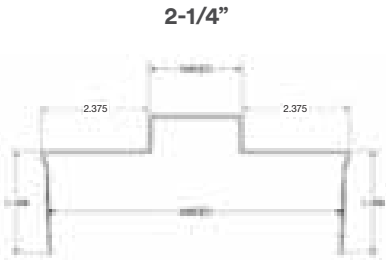	<b>Strike Options</b>	T-Strike ASA Strike DeadBolt HES 8300	Rim Reinforcement No Ha FlushBolt	<b>Pivot Options</b>	Rixson Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 018 ABH Intermediate Pivot 019
	<b>Hinge Options</b>	4-1/2" Mortise Hinge RocYork RY-60 / RY-80 / RY-120 Soss 218 / 418 Tectus 340 / 527 / 540		<b>Closer Options</b>	LCN 3130 Dorma ITS96 RocYork RYCC60950 PA Reinforcement RocYork RYSC801100 LCN 2030
	<b>Power Switch</b>	EPT Power Transfer Door Position Switch		<b>Holders and Stops</b>	GJ 100 & 400 Series
	<b>Strike Options</b>	T-Strike ASA Strike DeadBolt HES 8300	Rim Reinforcement No Ha FlushBolt	<b>Pivot Options</b>	Rixson Top Pivot 180 Rixson Intermediate Pivot M19 ABH Top Pivot 018 ABH Intermediate Pivot 019
	<b>Hinge Options</b>	4-1/2" Mortise Hinge RocYork RY-60 / RY-80 / RY-120 Soss 218 / 418 Tectus 340 / 527 / 540		<b>Closer Options</b>	LCN 3130 Dorma ITS96 RocYork RYCC60950 PA Reinforcement RocYork RYSC801100 LCN 2030
	<b>Power Switch</b>	EPT Power Transfer Door Position Switch		<b>Holders and Stops</b>	GJ 100 & 400 Series

## Specification Details

- Frame Type

- Door Thickness

- Frame Width
- Frame Height

- Finished Wall Thickness

- Fire Rating
- Strike Type

- Strike Height

- Frame Handing
- Hinge Type

- Hinge Quantity

EX. DRC - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RY80 - 3

### Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

### Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.


### Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request. Expedited orders can be dispatched within 7-10 working days from receipt of order. A minimum charge of \$150 or 40% total order cost, whichever is greater is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

### Custom Door Sizes

- Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

## North America Door Handing

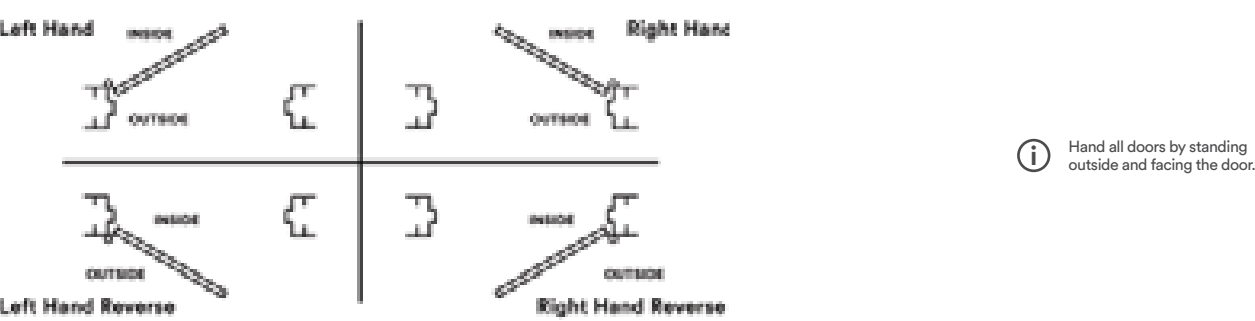

EzyJamb | DRC Double Rabbet Door Frame


# Installation Instructions

## Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.


**i** When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

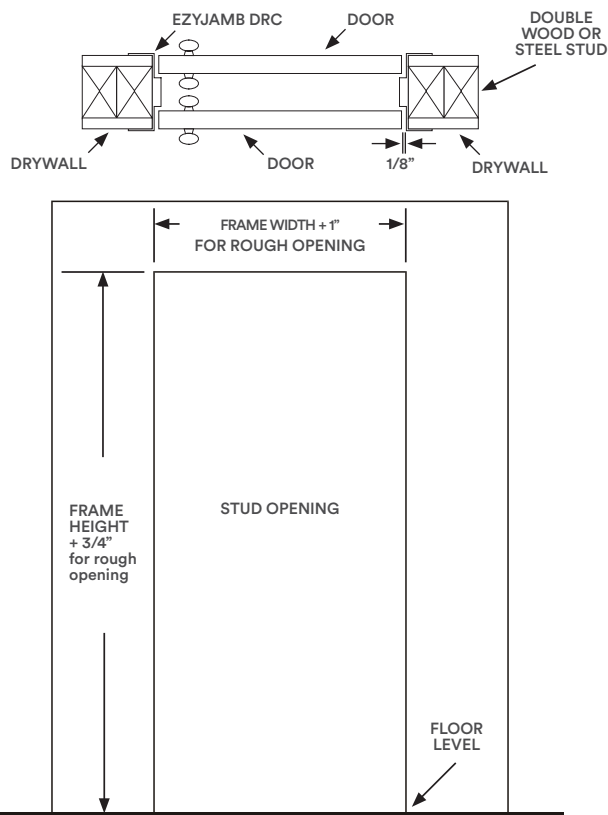


## Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See *Detail 'B'* and *'C'*.


Double screw all ends as *Detail D*. and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.

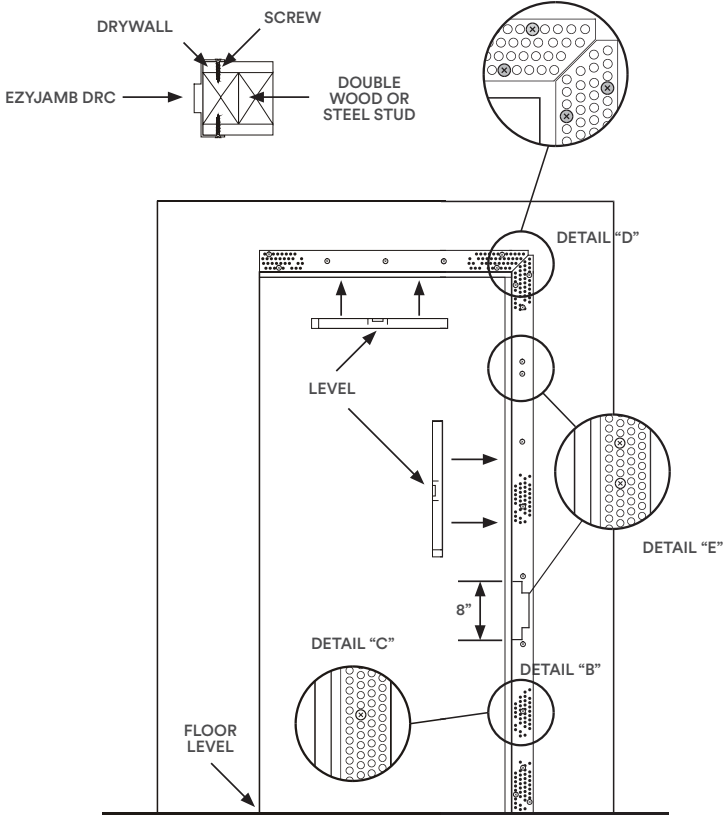

## Step 2A | Head Installation

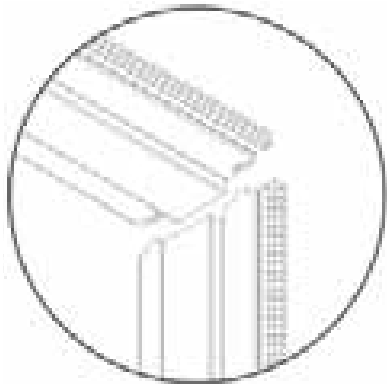

Locate fixing tabs to header.

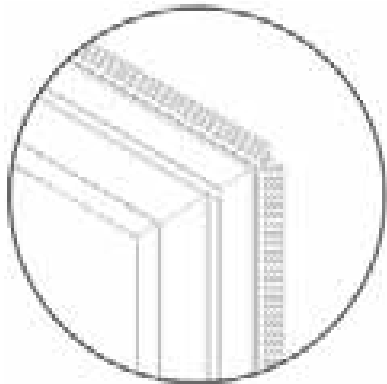


Corner Detail Completed

EzyJamb | DRC Double Rabbet Door Frame

# Installation Instructions

## Step 3


Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

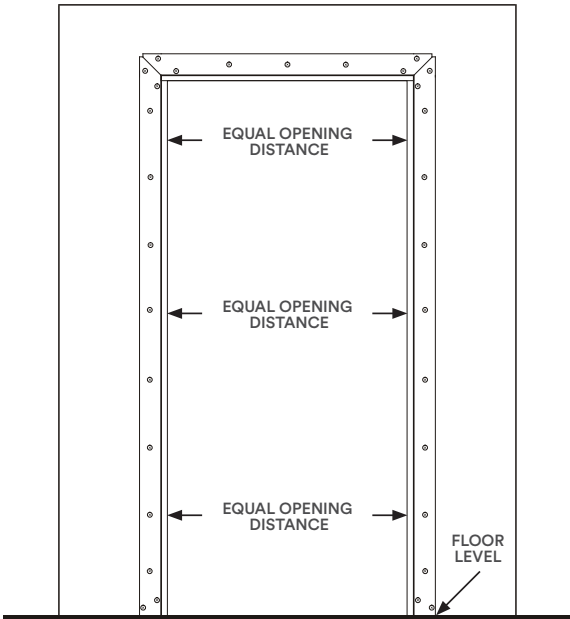

## Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

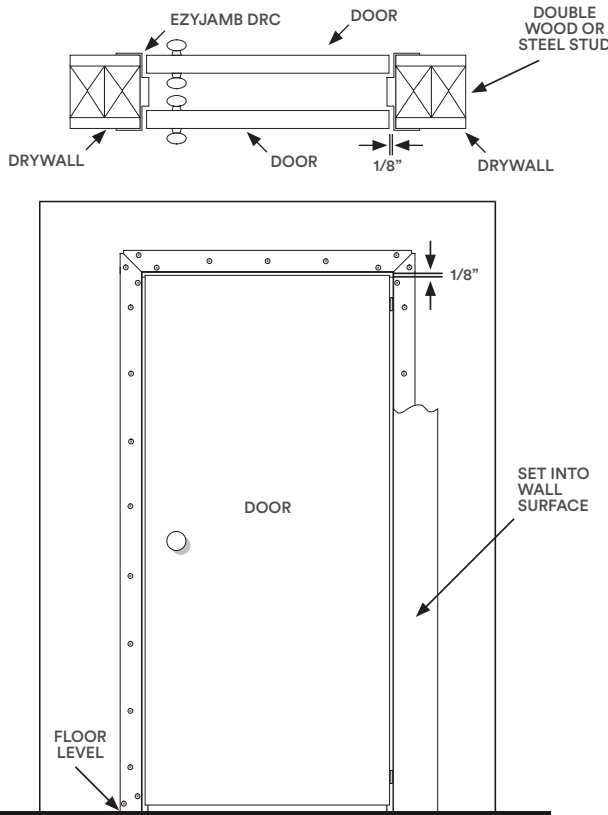

## Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

[www.ezconcept.com/installation](http://www.ezconcept.com/installation)





Door Hardware

The combination of premium quality door furniture and contemporary interior styling is defined in RocYork®, authentic door hardware for the EzyJamb system. The RocYork range of functional door furniture integrates seamlessly with all facets of the EzyJamb door system to create that flush finish.


Concealed  
RocYork Concealed Hinges

Make your door hinges disappear with the all new RocYork concealed door hinge from EzyJamb. This revolutionary architectural breakthrough will allow uninterrupted clean lines around internal doors for the ultimate square-set interior.

Check out some of the features and benefits of the RocYork concealed door hinge from EZ Concept.

Features

- No visible barrel or pin
- Maintenance free bearing mechanism
- Aesthetically pleasing hinge covers

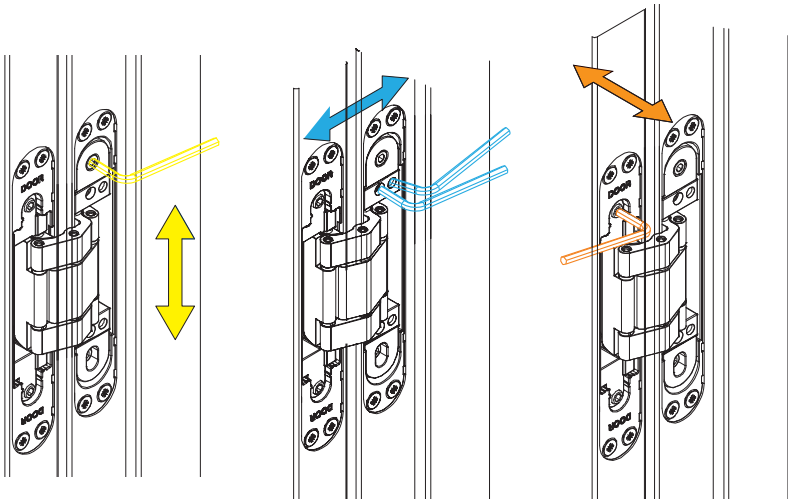

Concealed Hinges




RocYork RY-45

3 Axis Adjustable Concealed Hinge

Max Panel Width	36"
Max Panel Height	84"
Door Thicknesses	1-3/8", 1-3/4"
Adjustments	X: Horizontal +3,-2 Y: Depth ±1 Z: Vertical ±2.5
Capacity <sup>1</sup>	100 lbs (2) RY-45 Hinges 132 lbs (3) RY-45 Hinges
Finishing	Satin Chrome 626 Stainless Steel Look 630 White Black
Fire Rating <sup>2</sup>	UL 20 Minutes

- 1 When used with EzyJamb Flush Finish Frames three hinges are strongly recommended.
- 2 Tested in the US by UL in accordance with ANSI/UL 10C Fire Test of Door Assemblies




RocYork RY-50

3 Axis Adjustable Concealed Hinge

Max Panel Width	36"
Max Panel Height	84"
Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3,-2 Y: Depth ±1 Z: Vertical ±3
Capacity <sup>1</sup>	110 lbs (2) RY-50 Hinges 154 lbs (3) RY-50 Hinges
Finishing	Satin Chrome 626
Fire Rating <sup>2</sup>	UL 20 Minutes

- 1 When used with EzyJamb Flush Finish Frames three hinges are strongly recommended.
- 2 Tested in the US by UL in accordance with ANSI/UL 10C Fire Test of Door Assemblies




RocYork RY-60

3 Axis Adjustable Concealed Hinge

Max Panel Width	36"
Max Panel Height	84"
Door Thicknesses	1-3/8" - 1-3/4"
Adjustments	X: Horizontal +3,-2 Y: Depth +/- 1 Z: Vertical +/- 2.5
Capacity <sup>1</sup>	132 lbs (2) RY-60 Hinges 168 lbs (3) RY-60 Hinges
Finishing	Satin Chrome 626 Polished Chrome 629 Satin Nickel 619 Black
Fire Rating	Pending

- 1 When used with EzyJamb Flush Finish Frames three hinges are strongly recommended.




RocYork RY-80

3 Axis Adjustable Concealed Hinge

Max Panel Width	36"
Max Panel Height	108"
Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal +3,-2 Y: Depth ±1 Z: Vertical ±3
Capacity <sup>1</sup>	176 lbs (2) RY-80 Hinges 228 lbs (3) RY-80 Hinges
Finishing	Satin Chrome 626  Satin Nickel 619 White Black
Fire Rating <sup>2</sup>	UL 20 Minutes

- 1 When used with EzyJamb Flush Finish Frames three hinges are strongly recommended.
- 2 Tested in the US by UL in accordance with ANSI/UL 10C Fire Test of Door Assemblies



RocYork RY-120

3 Axis Adjustable Concealed Hinge

Max Panel Width	36"
Max Panel Height	120"
Door Thicknesses	1-3/4" - 2-1/4"
Adjustments	X: Horizontal ±3 Y: Depth +3/-2 Z: Vertical ±1
Capacity <sup>1</sup>	265 lbs (2) RY-120 Hinges 308 lbs (3) RY-120 Hinges
Finishing	Satin Chrome 626
Fire Rating <sup>2</sup>	UL 20 Minutes

- 1 When used with EzyJamb Flush Finish Frames three hinges are strongly recommended.
- 2 Tested in the US by UL in accordance with ANSI/UL 10C Fire Test of Door Assemblies

Mortised Hinges



4-1/2" x 4" Hinge	
Mortised Hinge	
Door Thickness	1 3/4"
Version	4-1/2" x 4" Mortised Hinge
Material Gauge	.134
Finishing	Stainless Steel 630
Fire Rating	90 Minutes



4" x 3-1/2" Hinge	
Mortised Hinge	
Door Thickness	1 3/4"
Version	4" x 3-1/2" Mortised Hinge
Material Gauge	.134
Finishing	Stainless Steel 630
Fire Rating	90 Minutes

Non-Mortised Hinges



4" x 3" Hinge	
Non-Mortised Hinge	
Door Thickness	1 3/8" Door
Version	4" x 3" Ball Bearing Hinge
Material Gauge	.134
Finishing	Stainless Steel 630 Stain Chrome 626 Oil Rubbed Brone 613



4" x 3 1/2" Hinge	
Non-Mortised Hinge	
Door Thickness	1-3/4"
Version	4" x 3 1/2" Ball Bearing Hinge
Material Gauge	.134
Finishing	Stainless Steel 630 Satin Chrome 626 Bright Chrome 625 Oil Rubbed Bronze 613
Fire Rating	90 Minutes

Spring Non-Mortised Hinges



4" x 4" Hinge	
Spring Non-Mortised Hinge	
Door Thickness	1 3/4" Door
Version	4" x 4" Ball Bearing Hinge
Material Gauge	.134
Finishing	Stainless Steel 630




4 1/2" x 4 1/2" Hinge	
Spring Mortised Hinge	
Door Thickness	1 3/4" Door
Version	4 1/2" x 4 1/2" Spring Hinge
Material Gauge	.134
Finishing	Stainless Steel 630

Hardware Accessories




EzyJamb Short Lip T-Strike	
HW-RYSSRLSP	
Door Thicknesses	1-1/8" x 2-3/4"
Finishing	Stainless Steel



EzyJamb Short Lip T-Strike	
(For Roller Latch) HW-SSRLSP	
Door Thicknesses	1-1/8" x 2-3/4"
Finishing	Stainless Steel



EzyJamb Door Silencer	
HW-RB	
Finishing	Gray




EzyJamb Dust Box for EZC	
HW-RYLBPI	
Finishing	Black Polyurethane




EzyJamb Short Lip ASA Strike	
HW- RYSSASASP	
Door Thicknesses	1-1/4" x 4-7/8"
Finishing	Stainless Steel

Conceaed Closers

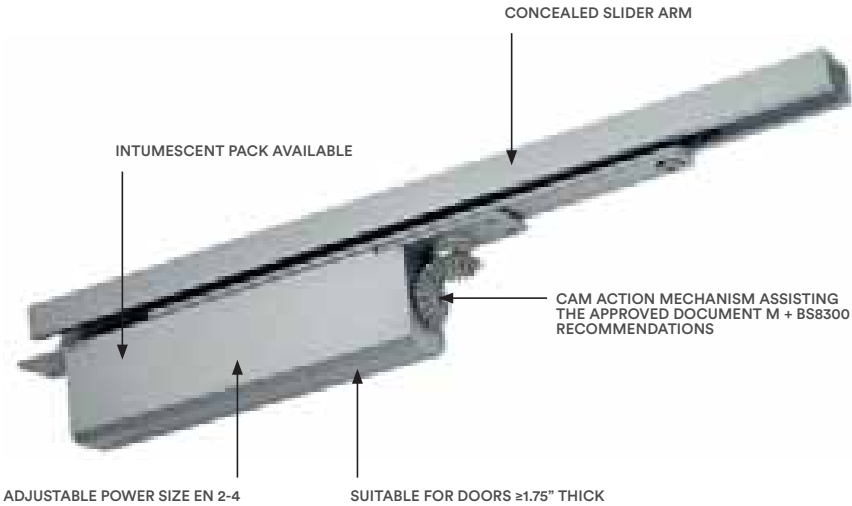

Concealed Slide Arm Closer	
HW-RYCC60950	
Max Door Weight	132lbs
Max Door Width	38"
Opening Angle	120°
Closing Speed	Adjustable
Fire Rating	60 Minutes

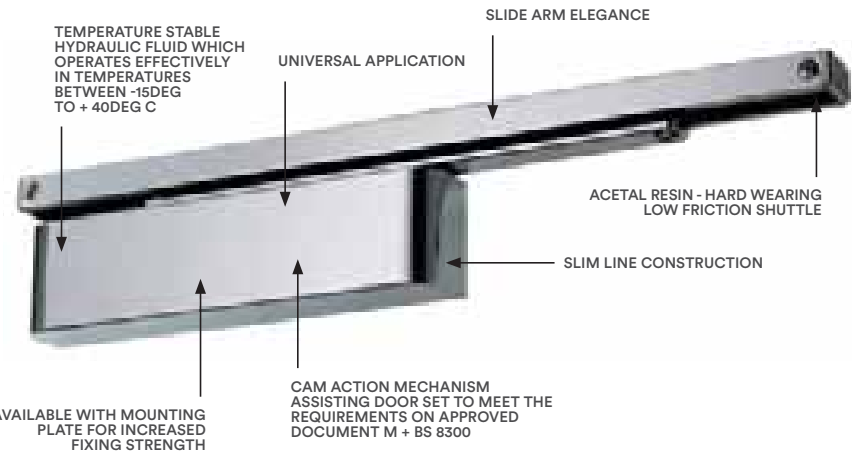

Surface Slide Arm Closer	
HW-RYSC801100	
Max Door Weight	176lbs
Max Door Width	44"
Opening Angle	120°
Closing Speed	Adjustable
Fire Rating	60 Minutes



Installation Tools



RocYork Router Jig (wood)	
Item Number	Product
HW-RGNO45S	RY-45 Nail on Single Router Guide
HW-RGCO45S	RY-45 Clamp on Single Router Guide
HW-RGNO50S	RY-50 Nail on Single Router Guide
HW-RGCO50S	RY-50 Clamp on Single Router Guide
HW-RGNO80S	RY-80 Nail on Single Router Guide
HW-RGCO80S	RY-80 Clamp on Single Router Guide
HW- RGNO120S	RY-120 Nail on Single Router Guide
HW-RGCO120S	RY-120 Clamp on Single Router Guide



RocYork NoHa Milling Tool	
Item Number	Product
NT T44	Mill Cutter for Noha Door Cavity

No-Ha Door Handles

The RocYork® No-Ha 2.0 is the next evolution in door handles.

Integrating door handle and magnetic lock in one box; RocYork No-Ha 2.0 enables doors to be opened and shut whilst completely concealing the handle providing the same finish as the door and walls.

RocYork No-Ha 2.0 is part of the RocYork No-Ha collection, which includes the RocYork No-Ha Slide for sliding doors, RocYork No-Ha for drawers, cupboards and other accessories such as plates, WC handles (possible with No-Ha Nm 937).

The RocYork No-Ha cover plate is interchangeable so that it can be made to match the finish of the door panel. Also available in MDF or brushed stainless steel, the No-Ha handle has a solution for all interior appearances.




Product Details

Part No.	Variant	Description	Finishing
NM938 SO/SS	Swing	NoHa Lock and Strike - Passage	Stainless Steel
NM937 SO/SS	Swing	NoHa Lock and Strike - Privacy	Stainless Steel
NM S012	Swing	Privacy Turn for NM937	Stainless Steel
NS105 SO/SS	Sliding	NoHa Sliding Handle - One Side	Stainless Steel
NM205 SO/SS	Sliding	NoHa Sliding Handle - Two Side	Stainless Steel
NK250 SO/SS	Cabinet	NoHa Cabinet Handle - One Side	Stainless Steel
NC PO1 SO/MDF	Coverplate	Coverplate for all NoHa Series	MDF Prime
NCP01 SO/SS	Coverplate	Coverplate for all NoHa Series	Stainless Steel



No-Ha Door Handles

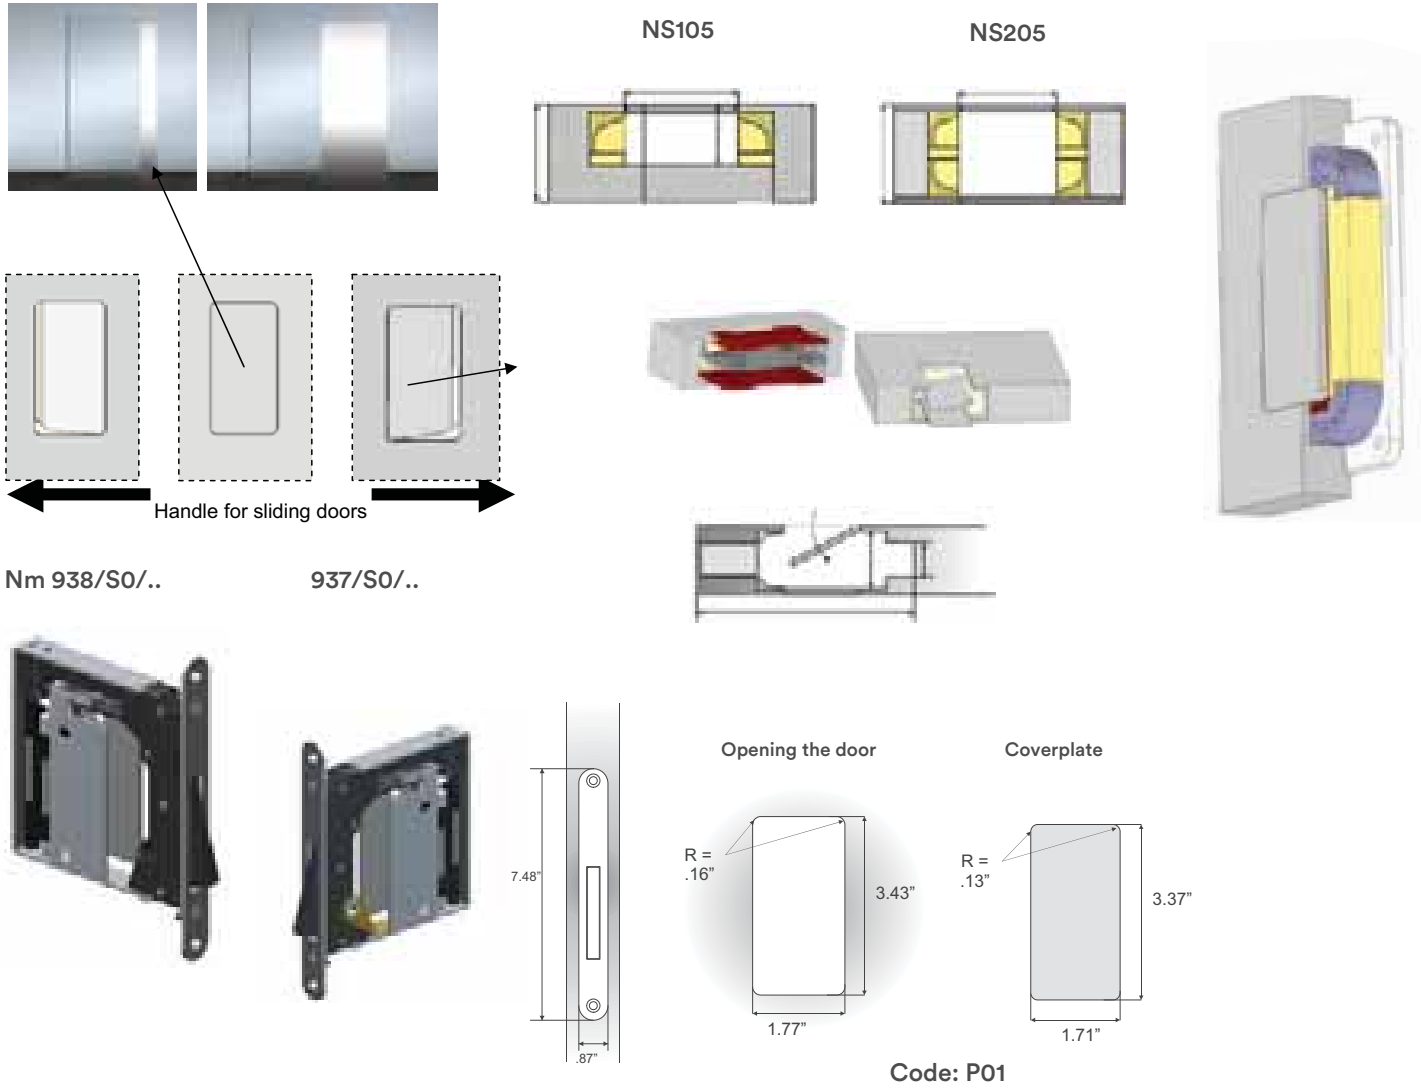


Completed Installation

NoHa is the perfect solution for eliminating typical exposed hardware to operate doors. The flush finish final appearance is the perfect way to compliment EZ Concept trimless applications.

For further information or assistance in installation of RocYork products, please visit:

[www.ezconcept.com/installation](http://www.ezconcept.com/installation)

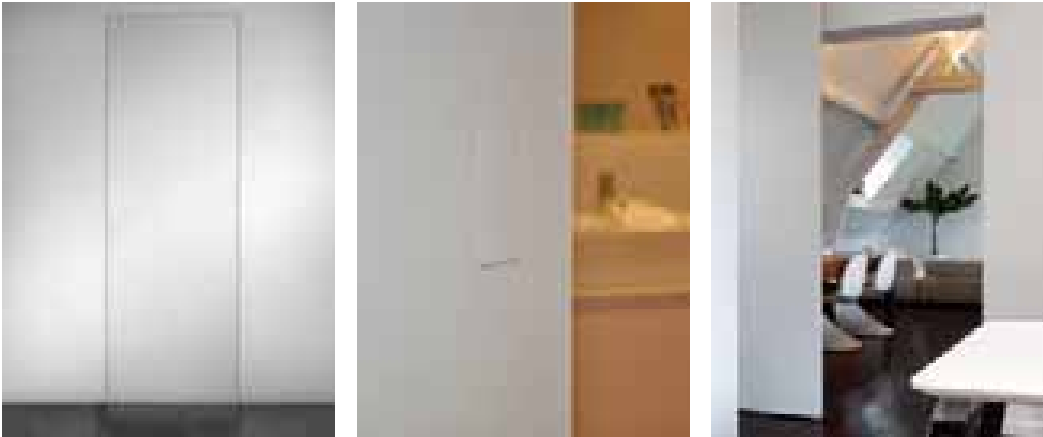






# CavKit

## Trims to suit pocket doors

CavKit is a flush finish that trims and caps the drywall edges around the door penetration, to create a pocket door that can be hidden when open and provide privacy when closed, without the look of bulky trims.

Designed to perfectly match the EzyJamb door jamb system for swing doors, the CavKit pocket door trim system allows you to create a consistent flush look across all of your interior doors.

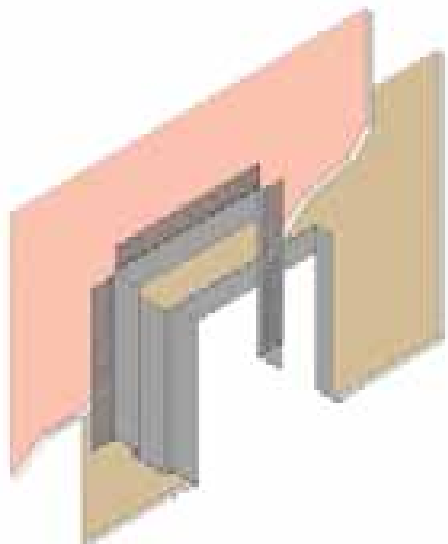

## Product Details


CAVKIT FLUSH FINISH POCKET DOOR TRIM KIT		ITEMS INCLUDED IN KIT
Door Widths	Up to 4-0' single or 8-0' pair	2x EzyReveal to Suit Width
Door Height	Up to 10-0'	1x Closer Cap to Suit Height 2x EzyReveal to Suit Height
Door Thickness	1-3/8",1-3/4",2-1/4"	
Finished Wall Thickness	Up to 12"	

\*Door and hardware sold seperately

## Installation Details


### CavKit | Head Detail

EzyReveal  
Flush Finish to Drywall

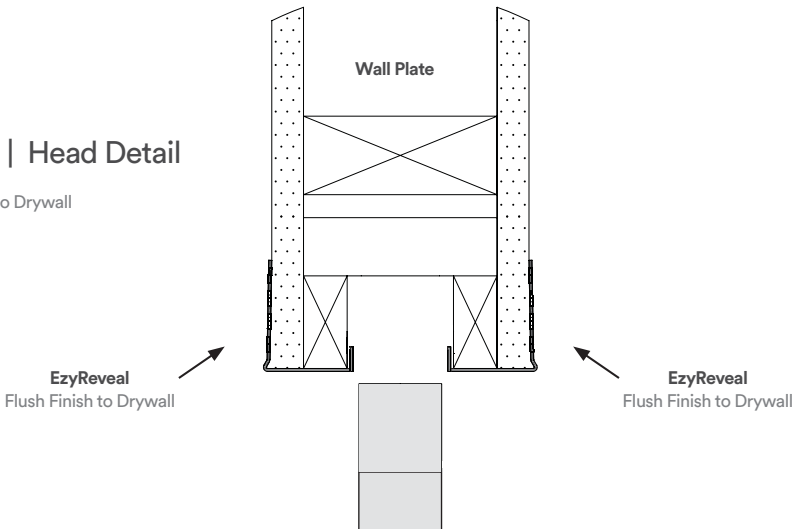




### CavKit | Plan View

CavKit with Closer Cap as Standard

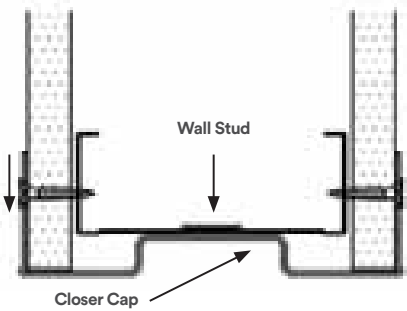

### CavKit | Plan View

CavKit with EzyCap upon request

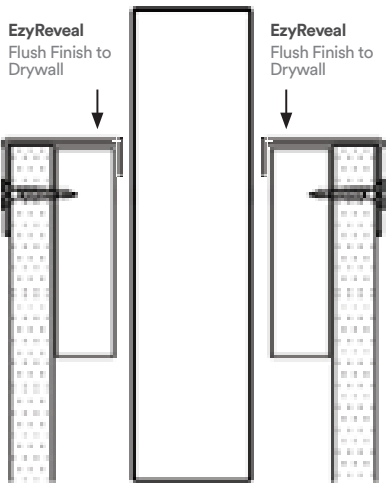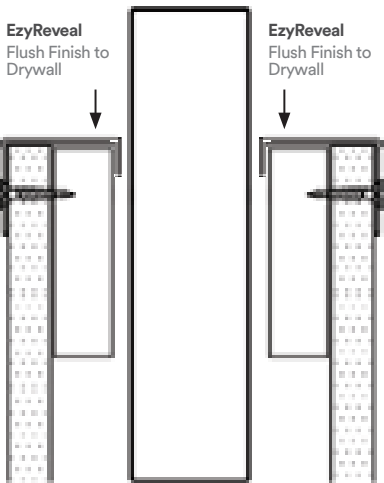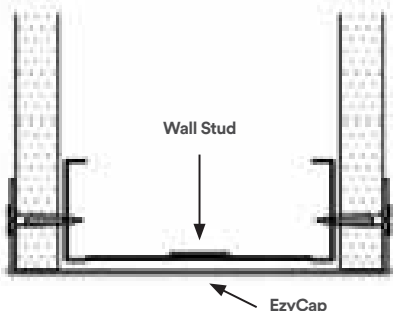

Standard Closer Cap



Optional EzyCap





# SlideSet

## The Flush Finish Pocket Door Solution

The SlideSet Pocket Door System has been designed to provide the absolute minimum of detail, giving the ability to completely conceal the door and give the impression that the door does not exist when open, and complete privacy when closed, adding a contemporary and architectural dimension to any project.



### SlideSet Features

- Hardware concealed in door providing minimum gap between door/track
- Mounting plates allow for 'lift-up' installation
- Stoppers with retention device installed inside track will retain door
- Ball bearing high quality rollers and aluminium track allows for smooth simple opening and closing operation.

### Product Details

EZ CONCEPT POCKET DOOR SYSTEM		
Door Height	6'8" - 10'-0"	(Custom sizes available on request)
Door Widths	2'0" - 4'-0"	(Single & Double available)
Door Thickness	1-3/8" - 1-3/4"	(Custom sizes available on request)
Door Weights	176/264lbs	(176lbs w/EzSoft - 264lbs w/o EzSoft)
Wall Stud Options	3-1/2", 3-5/8", 5-1/2", 6"	
Head Options	Standard	(See Cavkit Head Detail)


### Product Details

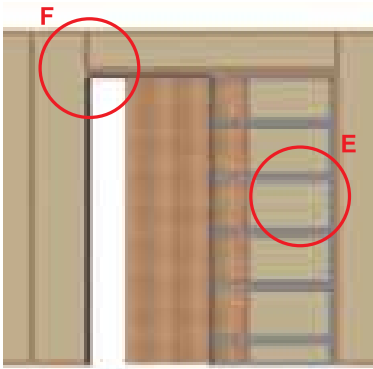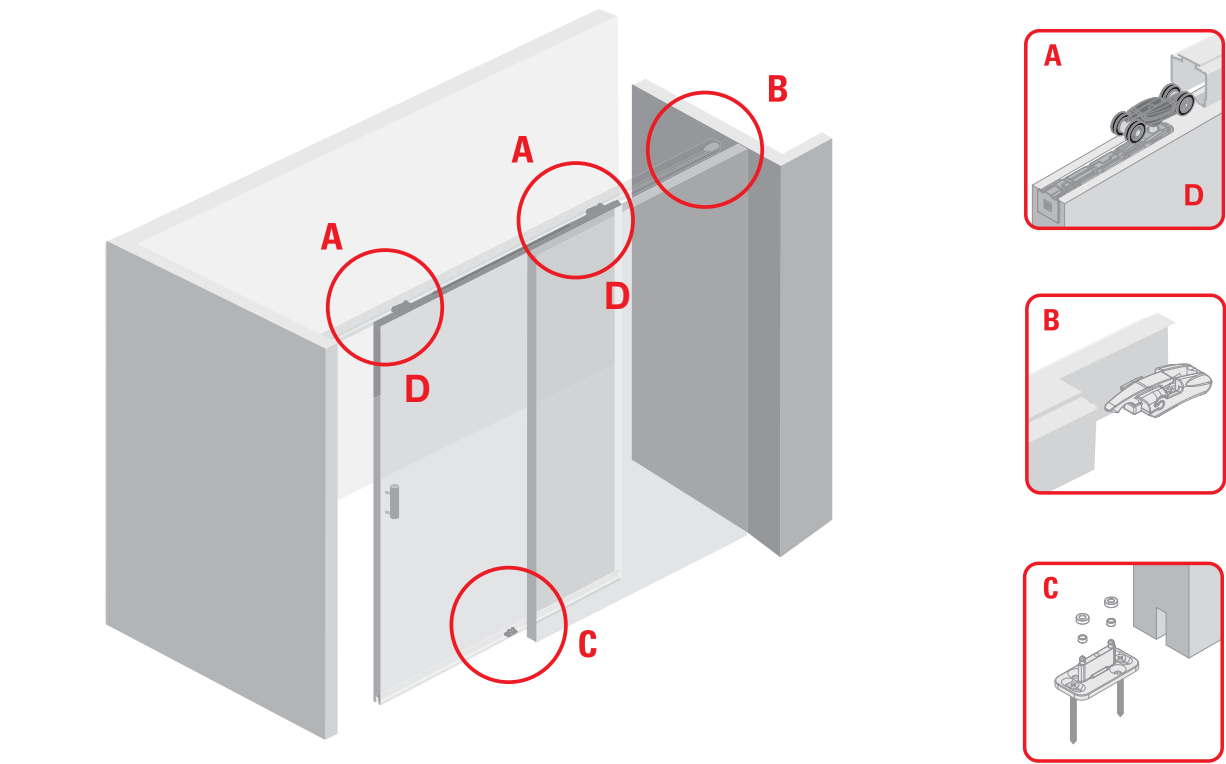


### SlideSet Includes:

- 1 / A Track
- 2 / A Carrier Assembly
- 2 / B Stopper with Retention
- 1 / C Floor Guide
- 2 / D Door Mounting Plates
- 1 / E Pocket Door Assembly
- 1 / F CavKit Trim
- 1 Screws for Assembly
- 1 Adjustment Tool


### Options




Ez-Soft avoids from bumping and gentle door closing.



Complete the kit by selecting a solid core paint grade door prepared for the SlideSet assembly.



No-Ha invisible handles create a concealed flush finish, for a complete minimalist package.

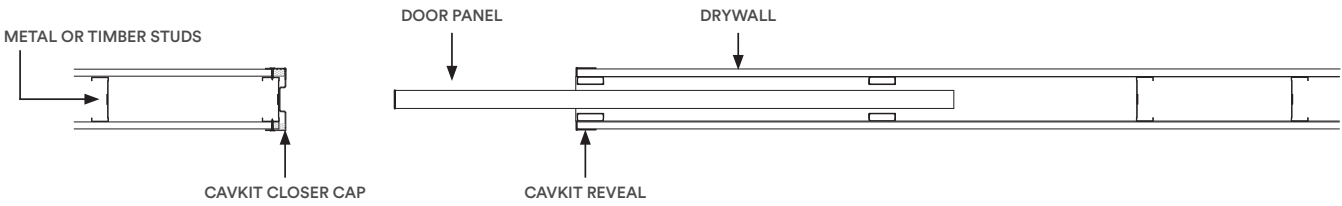


### Specification Details

- Stud Size	- Drywall	- Frame Width	- Frame Height	- Door Thickness	- Soft Top
EX . 3-5/8" - 5/8" - 3'-0" - 8'-0" - 1-3/4" - Y/N					


## Step 1

Identify the desired width and height of the door.

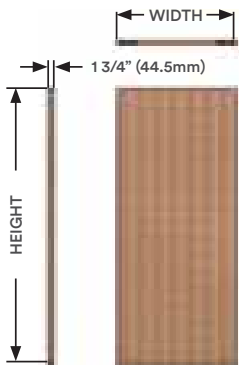


## Step 5

Insert assembly into rough opening. Level, plum, shim, fasten.

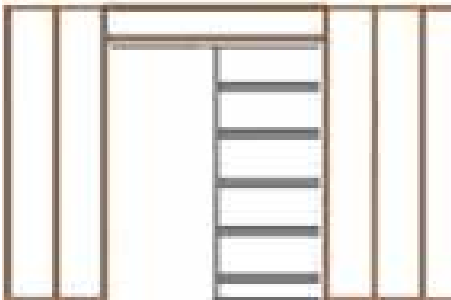


## Step 9

Hang drywall.

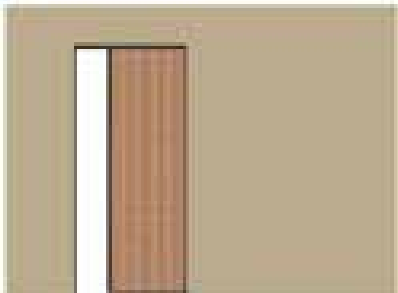


## Step 2

Prepare door for concealed carriers.

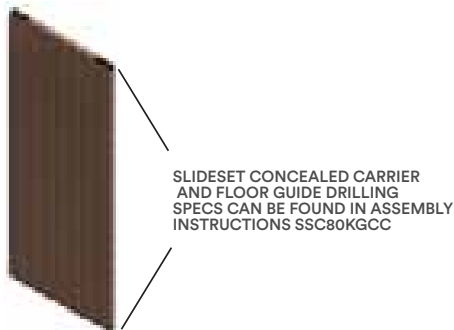


## Step 6

Insert floor guide.

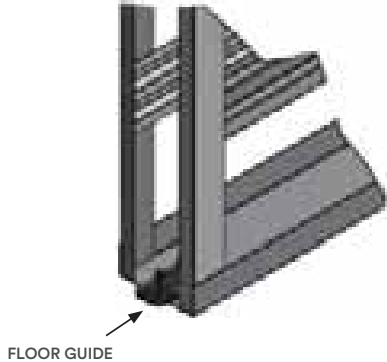


## Step 10

Install Closer Cap.

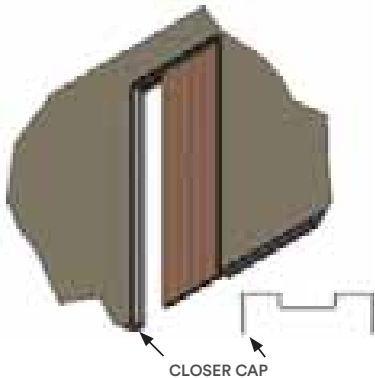


## Step 3

Prepare rough opening.

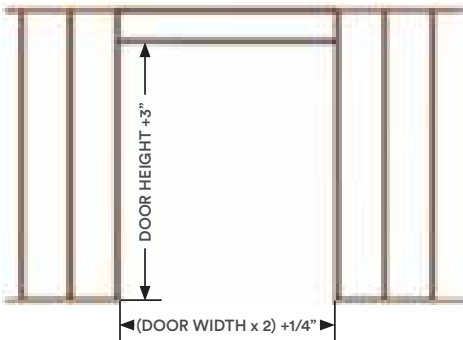


## Step 7

- A. Insert rear stop and slide to rear.
- B. Insert rear carrier and slide to middle.
- C. Insert front carrier.

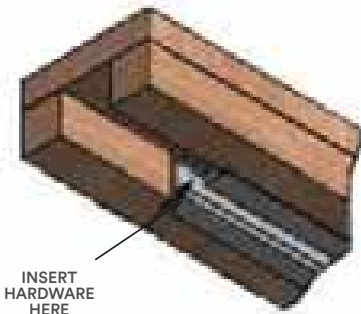

## Step 11

Install Reveal.

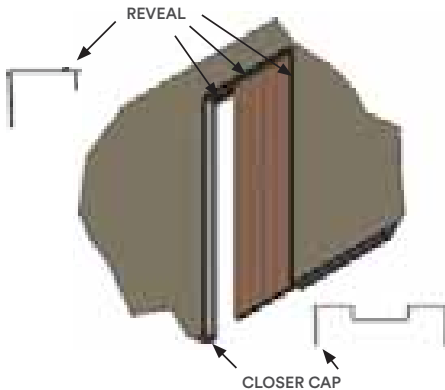


## Step 4

Fasten Track to Split Stud Wall Assembly.




## Step 8

- A. Hang door and slide into pocket.
- B. Insert front stop and slide to the rear a few inches.
- C. Place filler track in gap and fix to the assembly.
- D. Adjust and secure stops.

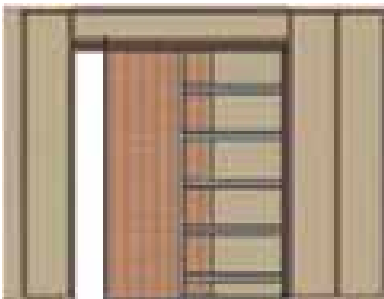

## Step 12

Tape and mud. Prime and paint.

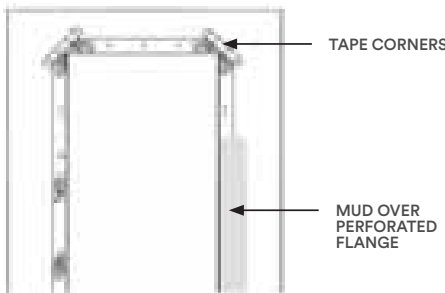






# AccessDor

## Smooth Transitions From Wall to Access Panel

AccessDor® cleverly conceals the appearance of the access panel by creating a flush finish to the drywall and eliminating the need for trims and architraves around the door. With only a 1/8” reveal between the door and Drywall, AccessDor blends seamlessly into the wall or ceiling, resulting in a frameless access panel.



Available in standard sizes or bespoke solutions, Access Dor can be custom made to fit your specifications. The EZ Concept range of AccessDor panels also includes a range of fire rated options and various latch choices to suit your security requirements, including screwdriver cam latch, key operated cam latch or touch latch.


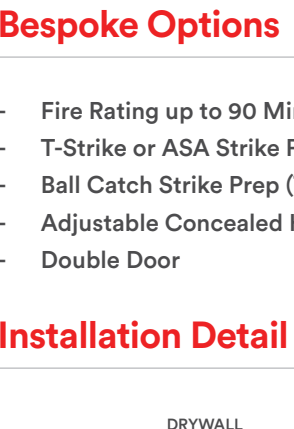
### Product Details

	STANDARD	BESPOKE
Door Height	6” - 48”	120” Max
Door Widths	6” - 24”	Made to Order
Door Thickness	14ga Cold Rolled Steel	1-3/4” Wood
Finished Wall Thickness	Single Side Face Mount	3-1/2” - 8-7/8”
Latch Plate Height	On centerline of door height	Located at desired specifications
Lock Options **	<div><div><div>1 Screwdriver Latch</div><div>2 Key Lock</div><div>3 Touch Latch</div></div><div><div>1</div><div>2</div><div>3</div></div><div></div></div>	

\*Door and hardware sold seperately  
\*\*For Standard Frames Only


## Standard Options


	Screwdriver Cam Latch		
	- Drywall Bead Flange		
	- Easy install tabs		
	- Removable Door for easy Installation		
	- Steel, Cold Rolled		
	- 14 Gauge Door		
	- 15 Gauge Door		
	- White Powder Paint		
	MODEL #	SIZE	ROUGH OPENING
	AD-1212SCL	12 × 12	12 1/4 x 12 1/4
	AD-1818SCL	18 × 18	18 1/4 x 18 1/4
	AD-2424SCL	24 × 24	24 1/4 x 24 1/4

	Key Operated Cam Latch		
	- Drywall Bead Flange		
	- Easy install tabs		
	- Removable Door for easy Installation		
	- Steel, Cold Rolled		
	- 14 Gauge Door		
	- 15 Gauge Door		
	- White Powder Paint		
	MODEL #	SIZE	ROUGH OPENING
	AD-1212KOCL	12 × 12	12 1/4 x 12 1/4
	AD-1818KOCL	18 × 18	18 1/4 x 18 1/4
	AD-2424KOCL	24 × 24	24 1/4 x 24 1/4

## Bespoke Options

- Fire Rating up to 90 Minutes
  - T-Strike or ASA Strike Prep
  - Ball Catch Strike Prep (T-Strike)
  - Adjustable Concealed Hinges
  - Double Door
- ### Installation Detail

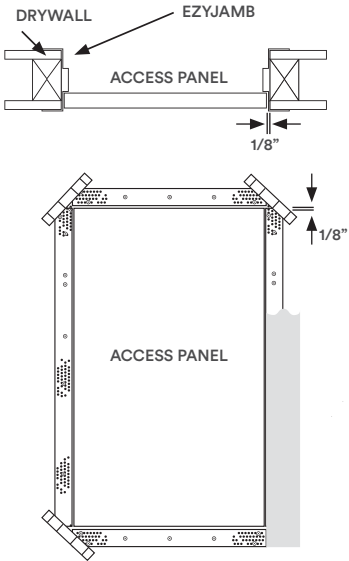



# Finishing Products



# EzyPelmet



## Fast, Economical Recessed Window Pelmet Systems

Adding a new dimension to the internal perimeter of square-set interiors, EzyPelmet® is a two-piece steel pelmet system that makes window blinds disappear, cleverly conceals feature lighting and opens vast panoramas before your eyes. EzyPelmet offers a simple and discrete transition between the interior ceiling and external windows, curtain wall facades or the building structure.

The two-piece, pre-finished steel construction of EzyPelmet makes installation simple, compared to traditional pelmet systems that require time consuming construction methods.

### EzyPelmet Features

- Contemporary, clearview design.
- Flush-finish edge for square-set interiors.
- Completely concealed fixings.
- Does not require fixing from the top.
- Install from below after ceiling.
- Fastest method for creating window pelmets.
- Suitable for blinds, curtain, lights & more.

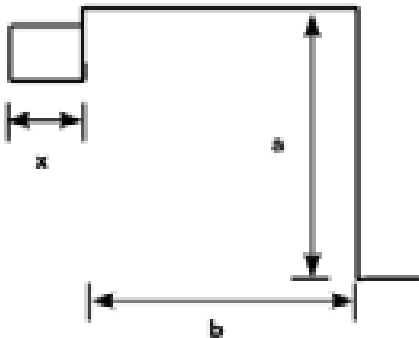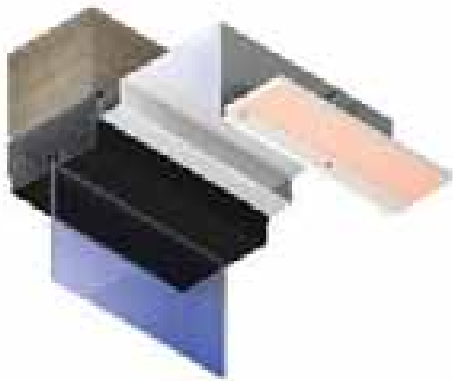


## Product Details


DIMENSION	DESCRIPTION	LENGTH	
X	WALL TRACK WIDTH	10'	(Custom Lengths Available)
A	PELMET HEIGHT	10'	(Custom Lengths Available)
B	PELMET WIDTH	10'	(Custom Lengths Available)

## Installation Detail


### Load Bearing Fixing Detail

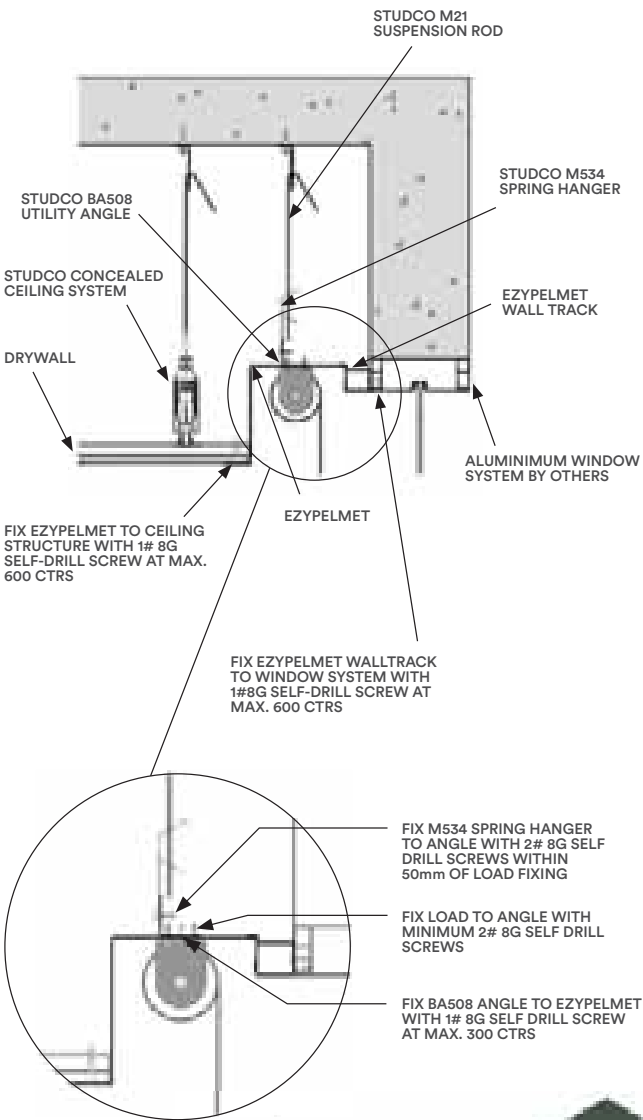

### Standard Fixing Detail

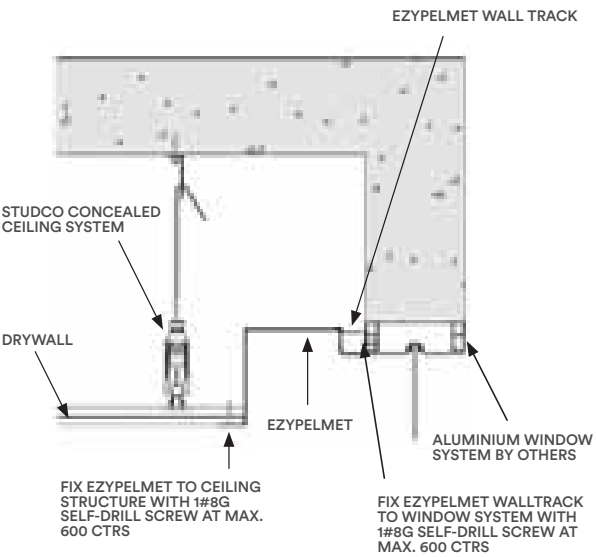

### EzyPelmet Fixing Detail

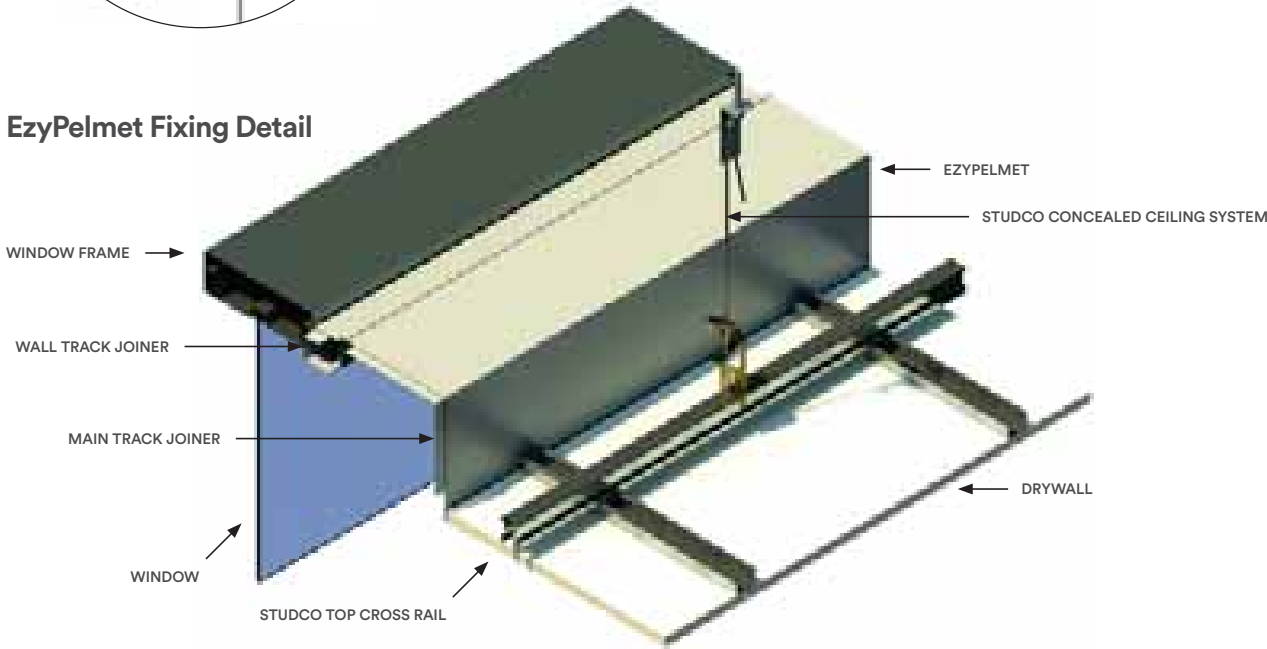



# EzyCap

## Cased Opening and Wall End Solution

Cased openings and capping of internal balustrades, window openings and internal partition wall ends are all made easy using EzyCap. Using a slip-fit fixing method, EzyCap simply slides onto the end of the drywall and doesn't require preparation to paint in with the rest of the wall, significantly reducing time and effort during installation and presenting a crisp finished wall end.

As the strong and versatile alternative for stop ends, EzyCap is an economical way to cap wall ends and prevent damage from wear and tear in high traffic areas over time, keeping masterpiece designs intact for years to come.



### Product Details

Part no.	Wall Thickness	Length	Material
EC92-358100-R	3-5/8"	10' 0"	20ga
EC98-378100-R	3-7/8"	10' 0"	20ga
EC118-458100-R	4-5/8"	10' 0"	20ga
EC124-478100-R	4-7/8"	10' 0"	20ga
EC127-5100-R	5"	10' 0"	20ga
EC175-678100	6-7/8"	10' 0"	20ga


**i Custom Wall Throat, Width and 18ga material available on request**

# FastCap


## Custom Finishing and Capping Made Easy

Inspired ceiling designs command attention using FastCap; this innovative solution easily inserts between the two sections of plasterboard to make light work of difficult recesses, drywall profiles and large oversized shadowlines.

Ideal for capping feature lighting or hardware, custom finishing and capping of plasterboard is made easy with the FastCap range of custom made finishing sections.

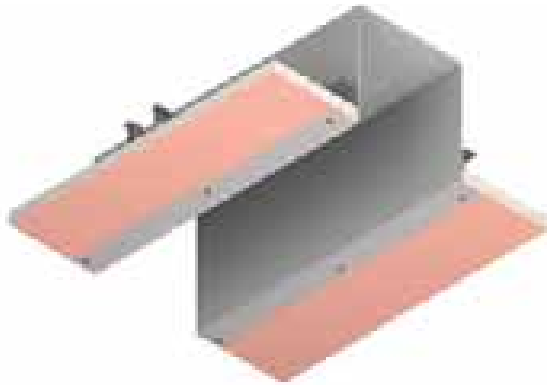


Custom FastCap

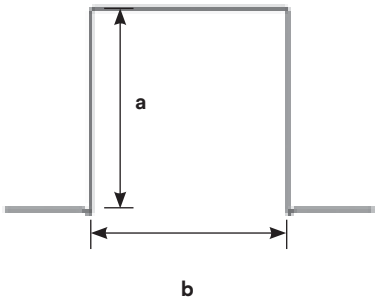

Custom size FastCap profile.  
Please specify sizes when ordering.

Shallow FastCap

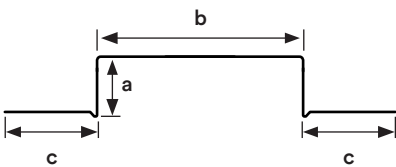

Custom size shallow FastCap profile.  
Please specify sizes when ordering.

**i 10' Length Standard  
Custom Sizes available on request**





# EzyReveal

Premium Square Set Trim Free Window Reveals


Eliminate trims and create pure clean lines for square set interiors using EzyReveal®. Manufactured from cold rolled steel EzyReveal® provides a strong and secure reveal eliminating warping, twisting, cracking and damage from UV rays. Installation is simple. The strong and durable metal rollformed EZ Concept sections have pre-punched perforated sides for fixing and have a specially formulated surface finish for a seamless plasterboard connection.

EzyReveal Features

- Designed for quick and economical finishing of reveals from 13/16” to 10-1/2”.
- 18 standard variants to suit various applications.
- Specially formulated surface finish for seamless connection with plasterboard.
- EzyReveal can be used with PVC finish trim to create custom size reveals.

Product Detail

Part No.	‘a’ Section Width	Length mm
RA20-1316100	13/16”	10’ 0”
RA25-1100	1”	10’ 0”
RA35-138100	1-3/8”	10’ 0”
RA45-134100	1-3/4”	10’ 0”
RA50-2100	2”	10’ 0”
RA60-238100	2-3/8”	10’ 0”
RA65-2916100	2-9/16”	10’ 0”
RA80-318100	3-1/8”	10’ 0”
RA90-3916100	3-9/16”	10’ 0”

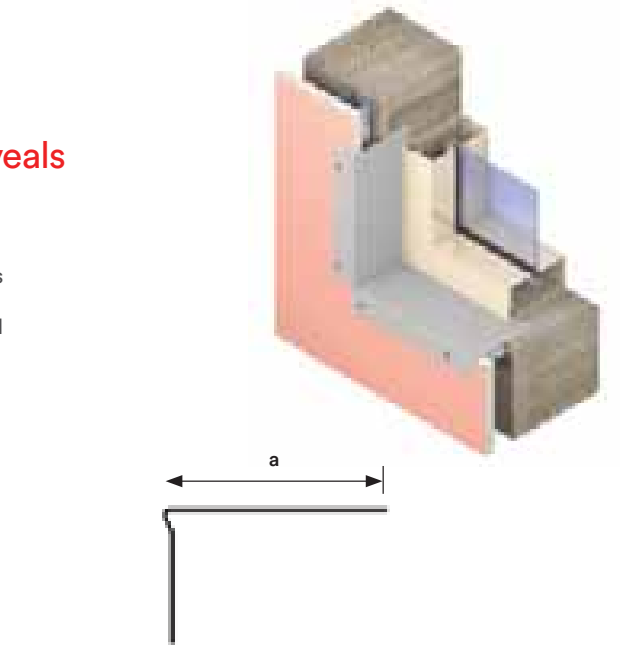

Part No.	‘a’ Section Width	Length mm
RA100-4100	4”	10’ 0”
RA110-438100	4-3/8”	10’ 0”
RA120-434100	4-3/4”	10’ 0”
RA138-512100	5-7/16”	10’ 0”
RA150-6100	6”	10’ 0”
RA265-1012100	10-1/2”	10’ 0”

 Custom widths available on request


# Custom Shadowline

Clean Contemporary Lines

Modern interior design is characterised by clean lines and flush finishes. Shadowline sections provide simple yet effective details to interior spaces, such as ceiling perimeters, doorways and skirting boards, amongst other applications. To create a unique profile for your project EZ Concept presents Custom Shadowline; made to meet your specific size requirements for the perfect fit in your design.

Shadowline Features

- Create the exact shadowline you need.
- Allow for variations in floor height or plaster thickness using a custom formed section.
- Heavy duty material to create a perfect straight and cleanline.

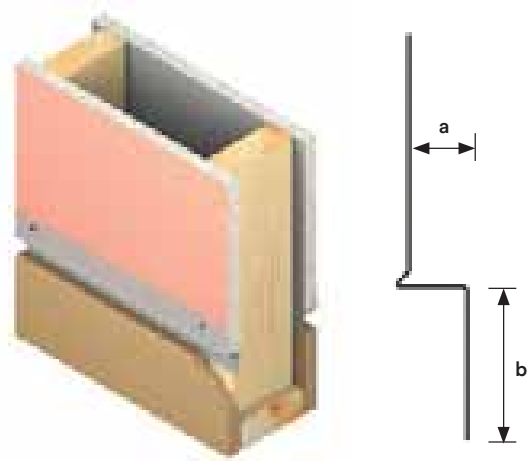

Custom size profile. Please specify sizes when ordering.

Product Detail

Part No.	‘a’ Section Width	‘b’ Section Height	Length
SL-1214100	1/2”	1/4”	10’
SL-1212100	1/2”	1/2”	10’
SL-121100	1/2”	1”	10’


Part No.	‘a’ Section Width	‘b’ Section Height	Length
SL-5814100	5/8”	1/4”	10’
SL-5812100	5/8”	1/2”	10’
SL-581100	5/8”	1”	10’

 Custom lengths and widths available on request

# Custom Finishing Sections

Create Harmonious Finishes

The clean line and square set look can now be achieved throughout your complete project. Contact the team at Studco to assist you with creating a custom flush finish section to suit your needs. Here at Studco we can provide a whole finishing package that will enable you to deliver the flush finish look.



 Custom lengths and widths available on request





# AluBase

## Anodized Aluminium Base Board Trim

AluBase® Base board is a modern alternative to traditional timber base boards. AluBase is equipped to residential suit modern finishes and commercial office environments.

### AluBase Features

- One piece profile manufactured from high quality aluminium.
- Concealed fixing system.
- Excellent resilience to wear and impact.
- Supplied in natural anodised finish.
- Perfect joints are easy with option joiners.
- Baseboard height 4"



## AluBase Options




Flat Skirting  
SK100

## Ordering Guide

To request a quote with EZ Concept, visit [www.ezconcept.com](http://www.ezconcept.com) or email [quotes@ezconcept.com](mailto:quotes@ezconcept.com) for a request form. If you require assistance with placing an order, please call our team on 1 888 399 5262.



Website Main Page

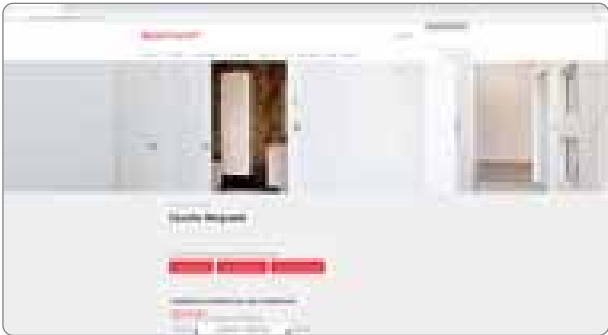

Quote Request Page



EzyJamb Quote Request Page

## Ordering Information and Conditions

### Availability

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO (first in, first out). For urgent orders, pleaser refer to the point below.

### Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request. Expedited orders can be dispatched within 7-10 working days from receipt of order. A minimum charge of \$150 or 40% of total order cost, whichever is greater, is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

## Notes

## Notes



**For Sales and Technical Enquiries, please contact EZ Concept USA.**

T: 1888 399 5262  
W: [www.ezconcept.com](http://www.ezconcept.com)  
E: [sales@ezconcept.com](mailto:sales@ezconcept.com)

Head Office - Rochester  
1700 Boulter Industrial Parkway,  
Webster, NY 14580

Los Angeles Office  
5450 W 83rd Street  
Los Angeles, CA 90045

