






Z EzyJamb

DRC | Double Rabbet Door Frame

The latest innovation in EzyJamb® Flush Finish Door Jambs, the Double Rabbet EzyJamb® – DRC allows for single or double doors to be hung in the fire-rated Jamb creating a modern look for interconnecting hotel rooms.

This modern approach to hotel door jambs complements discerning hotel interiors where a premium finish is required in all areas.




Product Details

EZYJAMB DRC DOUBLE RABBET DOOR FRAME - FOR 1-3/4 AND 2-1/4 DOORS

Material		18ga Galvanneal	
Max Width		3'-6" (Single) 6-0' (Double)	(Custom sizes available on request)
Max Height		10-0'	(Custom sizes available on request)
Wall Throat		4-1/2" - 9-7/8" in 1/8" increments (For 1-3/4 Doors) 5" - 1/2" - 9-7/8" in 1/8" increments (For 2-1/4 Doors)	(Custom sizes available on request)
Fire Rating		Up to 90 minutes	
Hinge Options	 Concealed Hinges Mortise Hinges Pivot Hinges 	2	3

Preparation Options

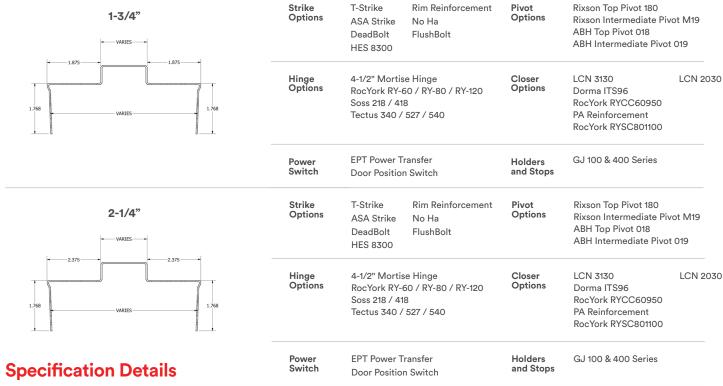

- Frame Type - Frame Height

- Finished Wall Thickness - Door Thickness

- Fire Rating

- Strike Type - Strike Height - Hinge Type

- Hinge Quantity

- Frame Handing

EX. DRC - 1.75 - 3-0' - 7-0' - 4-7/8 - 20MIN - ASA-38" - RH - RY80 - 3

Availability

- Frame Width

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

Floor to Ceiling Doors

- Floors to ceiling doors require no header jamb as the door extends the total height of the wall, when framing for this type of application allow the ceiling framing and drywall to carry on through to the adjacent space.


Expedited Orders

- For urgent orders, manufacturing processes can be expedited on request. Expedited orders can be dispatched within 7-10 working days from receipt of order. A minimum charge of \$150 or 40% total order cost, whichever is greater is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

Custom Door Sizes

Custom size EzyJamb, CavKit and SlideSet products are available on request. Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

North America Door Handing

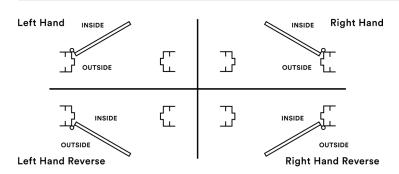

Hand all doors by standing outside and facing the door.


Installation Instructions

Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.


When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.

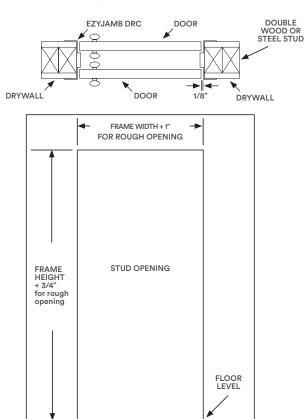


Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See *Detail 'B'* and 'C'.


Double screw all ends as *Detail D*, and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.

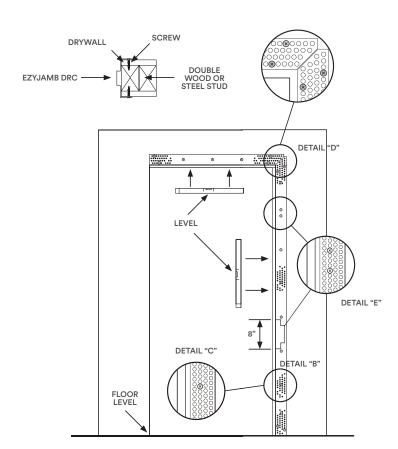

Step 2A | Head Installation



Locate fixing tabs to header.



Corner Detail Completed

▼ A EzyJamb | **DRC** Double Rabbet Door Frame

Installation Instructions

Step 3


Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

EQUAL OPENING DISTANCE EQUAL OPENING DISTANCE FLOOR LEVEL

Step 4

Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

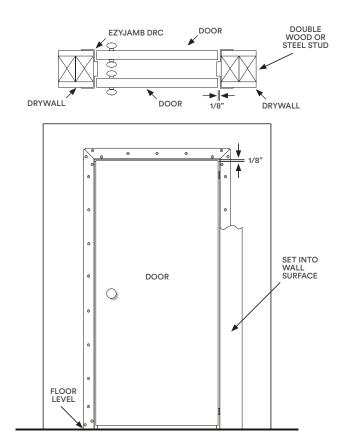

Completed Installation

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

www.ezconcept.com/installation









EZ Concept USA - New York

1700 Boulter Industrial Parkway Webster, NY 14850

Phone: 1 888 399 5262 F: 585.545.3010

E: sales@ezconcept.com E: quotes@ezconcept.com E: sales@rocyork.com

EZ Concept USA - Los Angeles

5450 W 83rd Street Los Angeles, CA 90045 (By appointment only) E: sales@ezconcept.com E: quotes@ezconcept.com E: sales@rocyork.com

EZ Concept Australia - Melbourne

130 - 140 Merrindale Drive, Croydon South, VIC 3136 Phone: 1300 399 526 E: sales@ezconcept.com.au W: www.ezconcept.com.au

EZ Concept United Kingdom

Unit 3 Europark, A5 Watling St Rugby, Warwickshire CV23 OAL E: sales@concept.co.uk W: www.ezconcept.co.uk A Studco Innovation

