








# **ISD** | Inswing Door Frame

EzyJamb Inswing Door - ISD is the ultimate door jamb system to achieve a seamless look in hallways and corridors. The EzyJamb ISD frame is suitable for applications that require the door to open inwardly from the flush side of the door, for a clean line along the wall face. The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing and is available with various hinge options.




#### **Product Details**

#### EZYJAMB ISD INSWING DOOR FRAME - FOR 1-3/4 AND 2-1/4 DOORS

Material		18ga Galvanneal	
Max Width		3'-6" (Single) 6-0' (Double)	(Custom sizes available on request)
Max Height		10-0'	(Custom sizes available on request)
Wall Throat		3-3/4" - 9-7/8" in 1/8" increments	(Custom sizes available on request)
Fire Rating		Pending	
Hinge Options	<ol> <li>Concealed Hinges</li> <li>Mortise Hinges</li> <li>Pivot Hinges</li> </ol>		3


## **Preparation Options**



Strike T-Strike
Options ASA Strike

DeadBolt

4" Mortise Hinge (8'0" Max Height) RocYork RY-60 (7'0" Max Height)



Strike T-Strike ASA Strike DeadBolt

NoHa Flushbolt

HES 8300 Electrical Strike

Pivot Rixson Top Pivot 180
Options Rixson Intermediate Pivot M19

ABH Top Pivot 018 ABH Intermediate Pivot 019

4-1/2" Mortise Hinge RocYork RY-80 / RY-120 Soss 218 / 418 Closer LCN 3130
Options Dorma ITS

Dorma ITS96 RocYork RYCC60950

Power Switch EPT Power Transfer
Door Position Switch

Tectus 340 / 540

# **Specification Details**

- Frame Type -

- Door Thickness

- Frame Height
- Finished Wall Thickness
- Strike Type
- Hinge Quantity

- Hinge Type

- Frame Width Fire Rating
- Strike HeightFrame Handing

EX . ISD - 2.25 - 3-0' - 7-0' - 4-7/8 - N/A - ASA-38" - RH - RY80 - 3

#### **Availability**

- All EzyJamb, CavKit and SlideSet products are made to order.
- Lead times apply to all EzyJamb, CavKit and SlideSet orders. Typical lead time from date of order to date of delivery is 15-20 working days. Longer lead times may apply in some cases. Always confirm exact lead time with EZ Concept prior to placing order.
- All orders are accepted by EZ Concept on a FIFO basis (first in, first out). For urgent orders, please refer to the point below.

#### Floor to Ceiling Doors

Floors to ceiling doors require no header jamb as the door extends the total height
of the wall, when framing for this type of application allow the ceiling framing and
drywall to carry on through to the adjacent space.


#### **Expedited Orders**

- For urgent orders, manufacturing processes can be expedited on request.
   Expedited orders can be dispatched within 7-10 working days from receipt of order.
   A minimum charge of \$150 or 40% total order cost, whichever is greater is applicable to expedited orders.
- Expedition of EzyJamb, CavKit and SlideSet orders is not always possible and is subject to operational requirements. Always confirm exact lead time with EZ Concept prior to placing order.

#### **Custom Door Sizes**

Custom size EzyJamb, CavKit and SlideSet products are available on request.
 Longer leader times and additional charges may apply for custom sizes. Custom latch plate punching is available on request.

# **North America Door Handing**

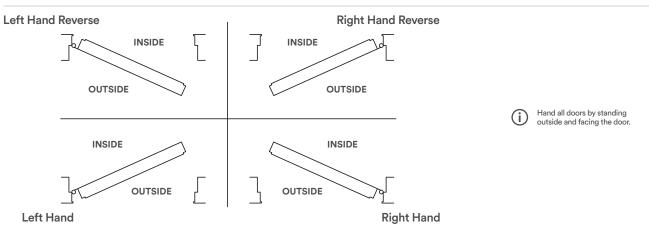

### **EzyJamb** | **ISD** Inswing Door Frame


# **Installation Instructions**


## Step 1

Ensure that the stud opening is square and level and is the correct size.

Make sure the rough opening has double studs, the manufacturer strongly recommends wood studs or a minimum 18 gauge .030 metal studs on both sides of the opening. Studco recommends double studs for this installation.

When using concealed hinges, the stud must be **notched** at each hinge location to ensure proper fitment.







## Step 2

Fasten hinge side first, making sure jamb is level and as tight against stud opening as possible. Then screw at 8" centers up stile, screwing back through drywall into stud jamb. See *Detail 'B'* and *'C'*.


Double screw all ends as *Detail D*, and beside hinge position - both above and below hinge if using concealed hinges as *Detail E*.

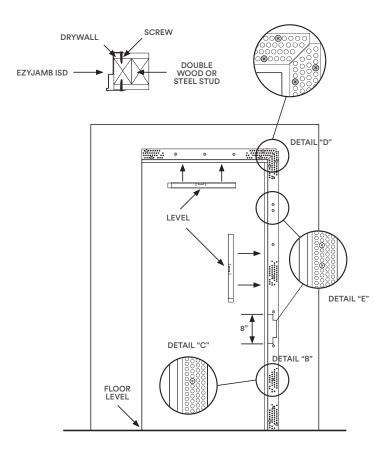

# Step 2A | Head Installation



Locate fixing tabs to header.



Double screw all ends as Detail D.

### **Z EzyJamb** ∣ **ISD** Inswing Door Frame

# **Installation Instructions**

## Step 3


Fasten the final vertical section (strike jamb) below the head section. Ensure that the spacing between the two vertical sections are spaced evenly at the required distance.

## Step 4


Ensure the perforated side strips sit flat against the drywall to enable the jamb sections to be easily set into the wall surface. Finish the jamb with drywall compound.

Hang the door in position leaving 1/8" clearance from the top and the hinged side using the EzyJamb Standard or Invisible Hinges. Install the striker plate into position to align with the latch plate punching.

**EZYJAMB ISD** 





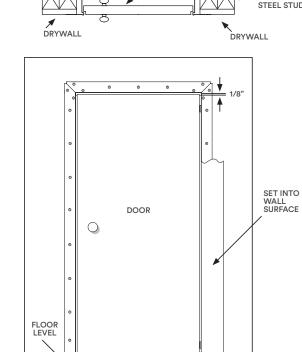

# **Completed Installation**

The completed jamb is flush finished and can be painted in with the whole wall area to fully conceal any fixing, achieving simple clean lines around the door face.

For further information or assistance in installation of EzyJamb products, please visit:

www.ezconcept.com/installation









#### **EZ Concept USA - New York**

1700 Boulter Industrial Parkway Webster, NY 14850

Phone: 1888 399 5262

F: 585.545.3010

E: sales@ezconcept.com E: quotes@ezconcept.com E: sales@rocyork.com

### **EZ Concept USA - Los Angeles**

5450 W 83rd Street Los Angeles, CA 90045 (By appointment only) E: sales@ezconcept.com E: quotes@ezconcept.com E: sales@rocyork.com

#### **EZ Concept Australia - Melbourne**

130 - 140 Merrindale Drive, Croydon South, VIC 3136 Phone: 1300 399 526 E: sales@ezconcept.com.au W: www.ezconcept.com.au

#### **EZ Concept United Kingdom**

Unit 3 Europark, A5 Watling St Rugby, Warwickshire CV23 0AL E: sales@concept.co.uk W: www.ezconcept.co.uk

A Studco Innovation

