




- Self-closing drawer slides
- Double stop
- Load capacity: 25kg
- Thickness: 1 - 1,2mm
- Lengths available: from 250 to 600mm

Mounting instructions

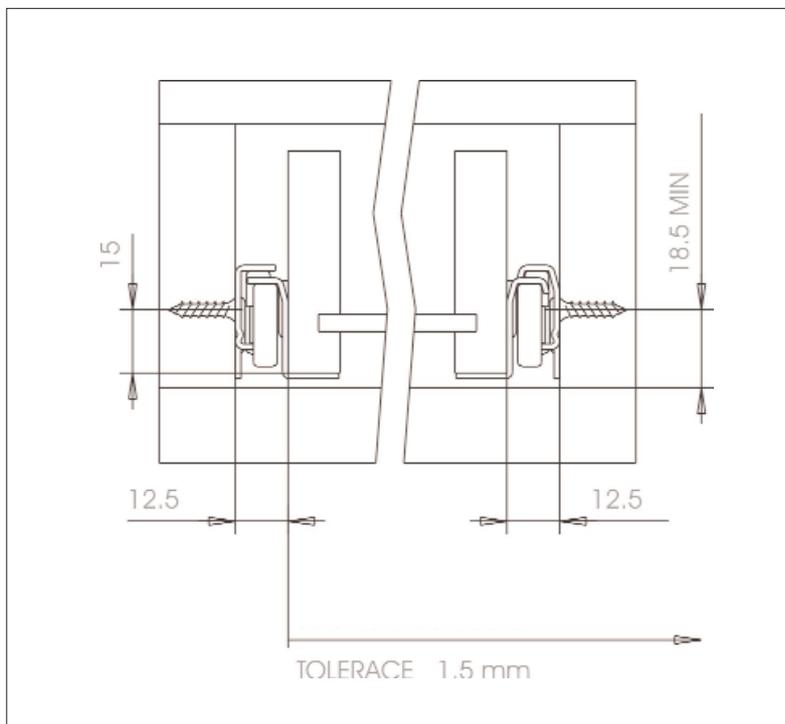

Ferrari hold the right to alter or amend any technical or structural specifications at any time without notice

ITALY

Agostino Ferrari S.p.a.
I - 23878 Verderio S. (LC) Via per Cornate
Tel. ++39.039.59001 - Fax ++39.039.5900222
Web Site://www.ferrarispa.it - e-mail: ferrarispa@ferrarispa.it

GERMANY

Agostino Ferrari Germany GMBH
Im Meisenfeld 5 - 32602 Vlotho - Exter Germany
Tel. 0049 5228 96080 - Fax 0049 5228 960824
Web Site://www.ferrari-fittings.de - e-mail: ferrari@ferrari-fittings.de

U.S.A.

Ferrari America INC.
4189 Eagle Hill Drive - Suite 110 - High Point - North Carolina - 27265 - U.S.A.
Tel. 001 336 8411445 - Fax 001 336 8413543
Web Site://www.ferrariamerica.com - e-mail: info@ferrariamerica.com



U.K.

Agostino Ferrari (UK) LTD Units H & L
Strawberry Street Industrial Estate HU9 1EN Hull East Yorkshire - U.K.
Tel. 0044 1482 594450 - Fax 0044 1482 594455
Web site://www.aferrariuk.com - e-mail: info@aferrariuk.com


GREECE

Ferrari Greece LTD
101 Syngrou Avenue - 11745 Athens -Greece
Tel. 0030 210 9211838 - Fax 0030 210 9211836
e-mail: ferrarinikos@internet.gr


Fixing systems




3.5x13mm woodscrews
or 8mm staples



Euroscrews 6.3x13mm



3.5x13mm woodscrews





Knock-in by premounted \varnothing 8mm
dowels (T). \varnothing 10mm on request

With thickness 1.2mm

Length	Code	Extension
250mm	GS250TV**	166mm
300mm	GS300TV**	216mm
350mm	GS350TV**	266mm
400mm	GS400TV**	316mm
450mm	GS450TV**	355mm
500mm	GS500TV**	398mm
550mm	GS550TV**	448mm
600mm	GS600TV**	498mm

With thickness 1mm

Length	Code	Extension
250mm	GS250SV**	166mm
300mm	GS300SV**	216mm
350mm	GS350SV**	266mm
400mm	GS400SV**	316mm
450mm	GS450SV**	355mm
500mm	GS500SV**	398mm
550mm	GS550SV**	448mm
600mm	GS600SV**	498mm

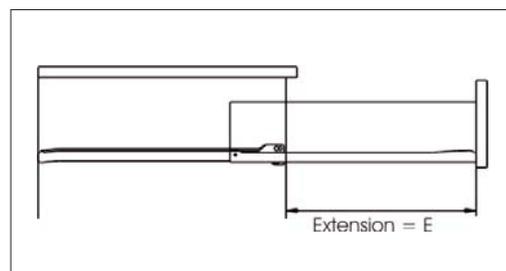

In case of heavy load fix
an additional screw in the
stated position.

Key **

Set finishing		
1	RAL 9001	White
F	RAL 9005	Black
D	RAL 8017	Brown

Packing	
I	Industrial
S	25 set
P	Single set

Ferrari hold the right to alter or amend any technical or structural specifications at any time without notice

ITALY
Agostino Ferrari S.p.a.
I - 23878 Verderio S. (LC) Via per Cornate
Tel. ++39.039.59001 - Fax ++39.039.5900222
Web Site://www.ferrarispa.it - e-mail: ferrarispa@ferrarispa.it

U.S.A.
Ferrari America INC.
4189 Eagle Hill Drive - Suite 110 - High Point - North Carolina - 27265 - U.S.A.
Tel. 001 336 8411445 - Fax 001 336 8413543
Web Site://www.ferrariamerica.com - e-mail: info@ferrariamerica.com


GREECE
Ferrari Greece LTD
101 Syngrou Avenue - 11745 Athens -Greece
Tel. 0030 210 9211838 - Fax 0030 210 9211836
e-mail: ferrarinikos@internet.gr

GERMANY
Agostino Ferrari Germany GMBH
Im Meisenfeld 5 - 32602 Vlotho - Exter Germany
Tel. 0049 5228 96080 - Fax 0049 5228 960824
Web Site://www.ferrari-fittings.de - e-mail: ferrari@ferrari-fittings.de

U.K.
Agostino Ferrari (UK) LTD Units H & L
Strawberry Street Industrial Estate HU9 1EN Hull East Yorkshire - U.K.
Tel. 0044 1482 59450 - Fax 0044 1482 59455
Web site://www.aferrariuk.com - e-mail: info@aferrariuk.com

T = FERRARI STANDARD DOWELS POSITION
(WHEN REQUIRED)

PROVVISORIO

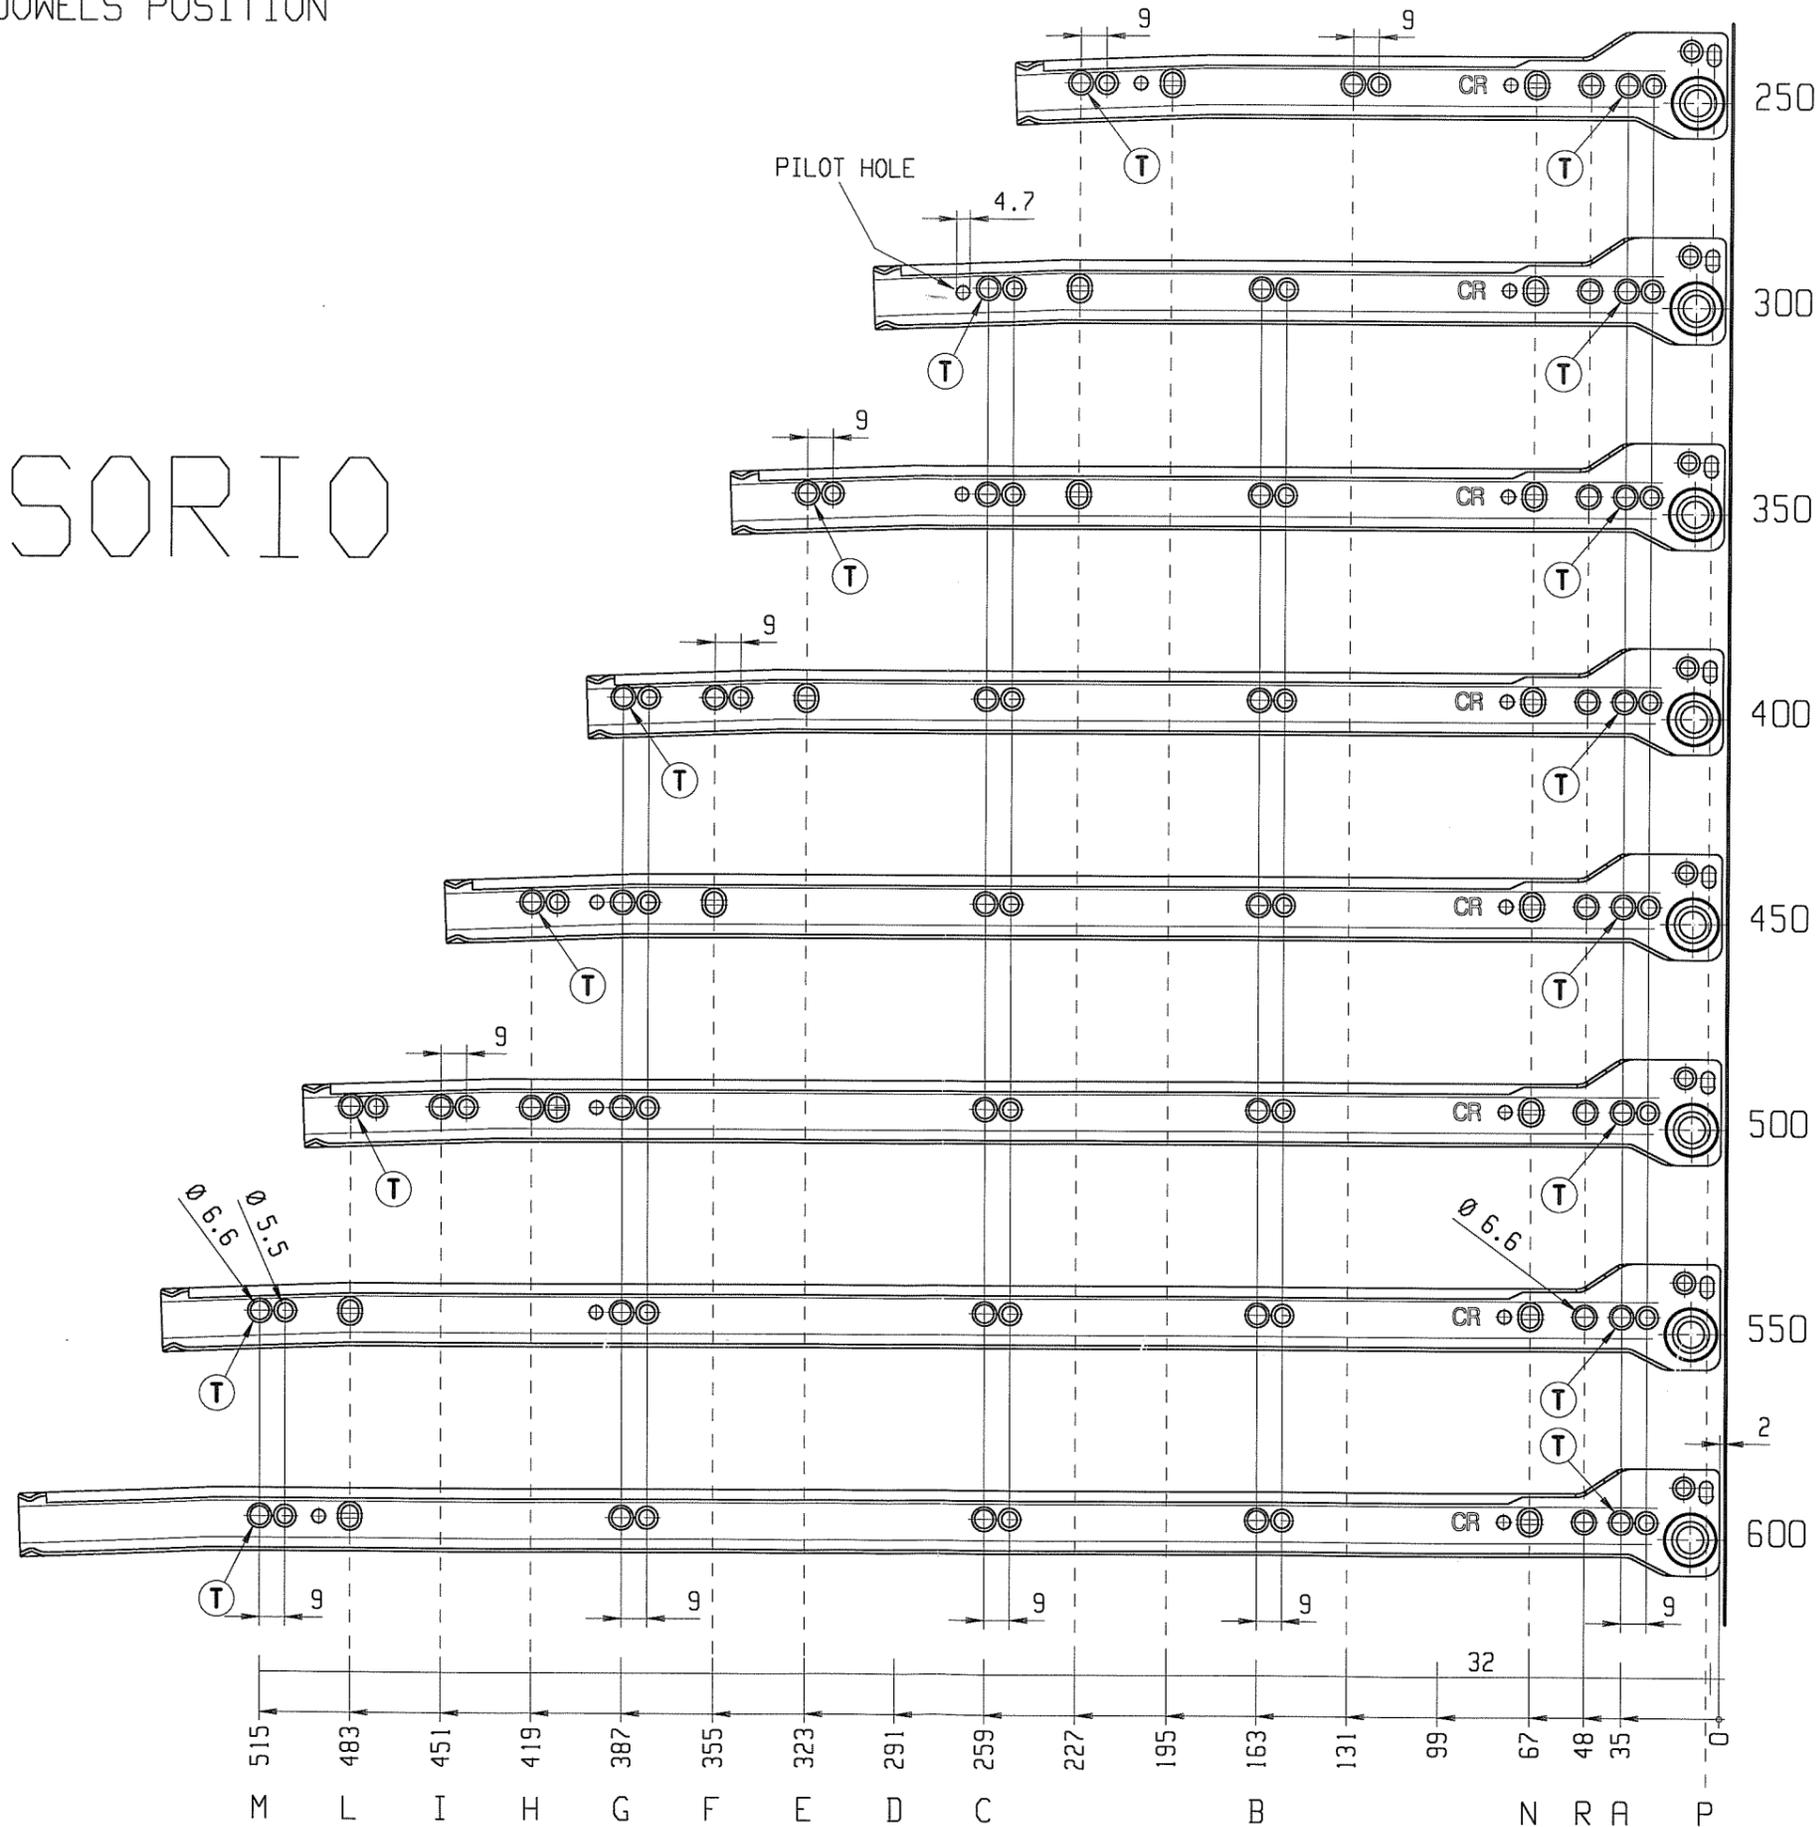

C	AGGIUNTI FORI A 48 , PER L=500 AGGIUNTI FORO E ASOLA A 419	19/03/04	FIRMA	VISTO
N	MODIFICA	DATA		

SGS2L600

SGS2L550

SGS2L500


SGS2L450

SGS2L400

SGS2L350

SGS2L300

SGS2L250

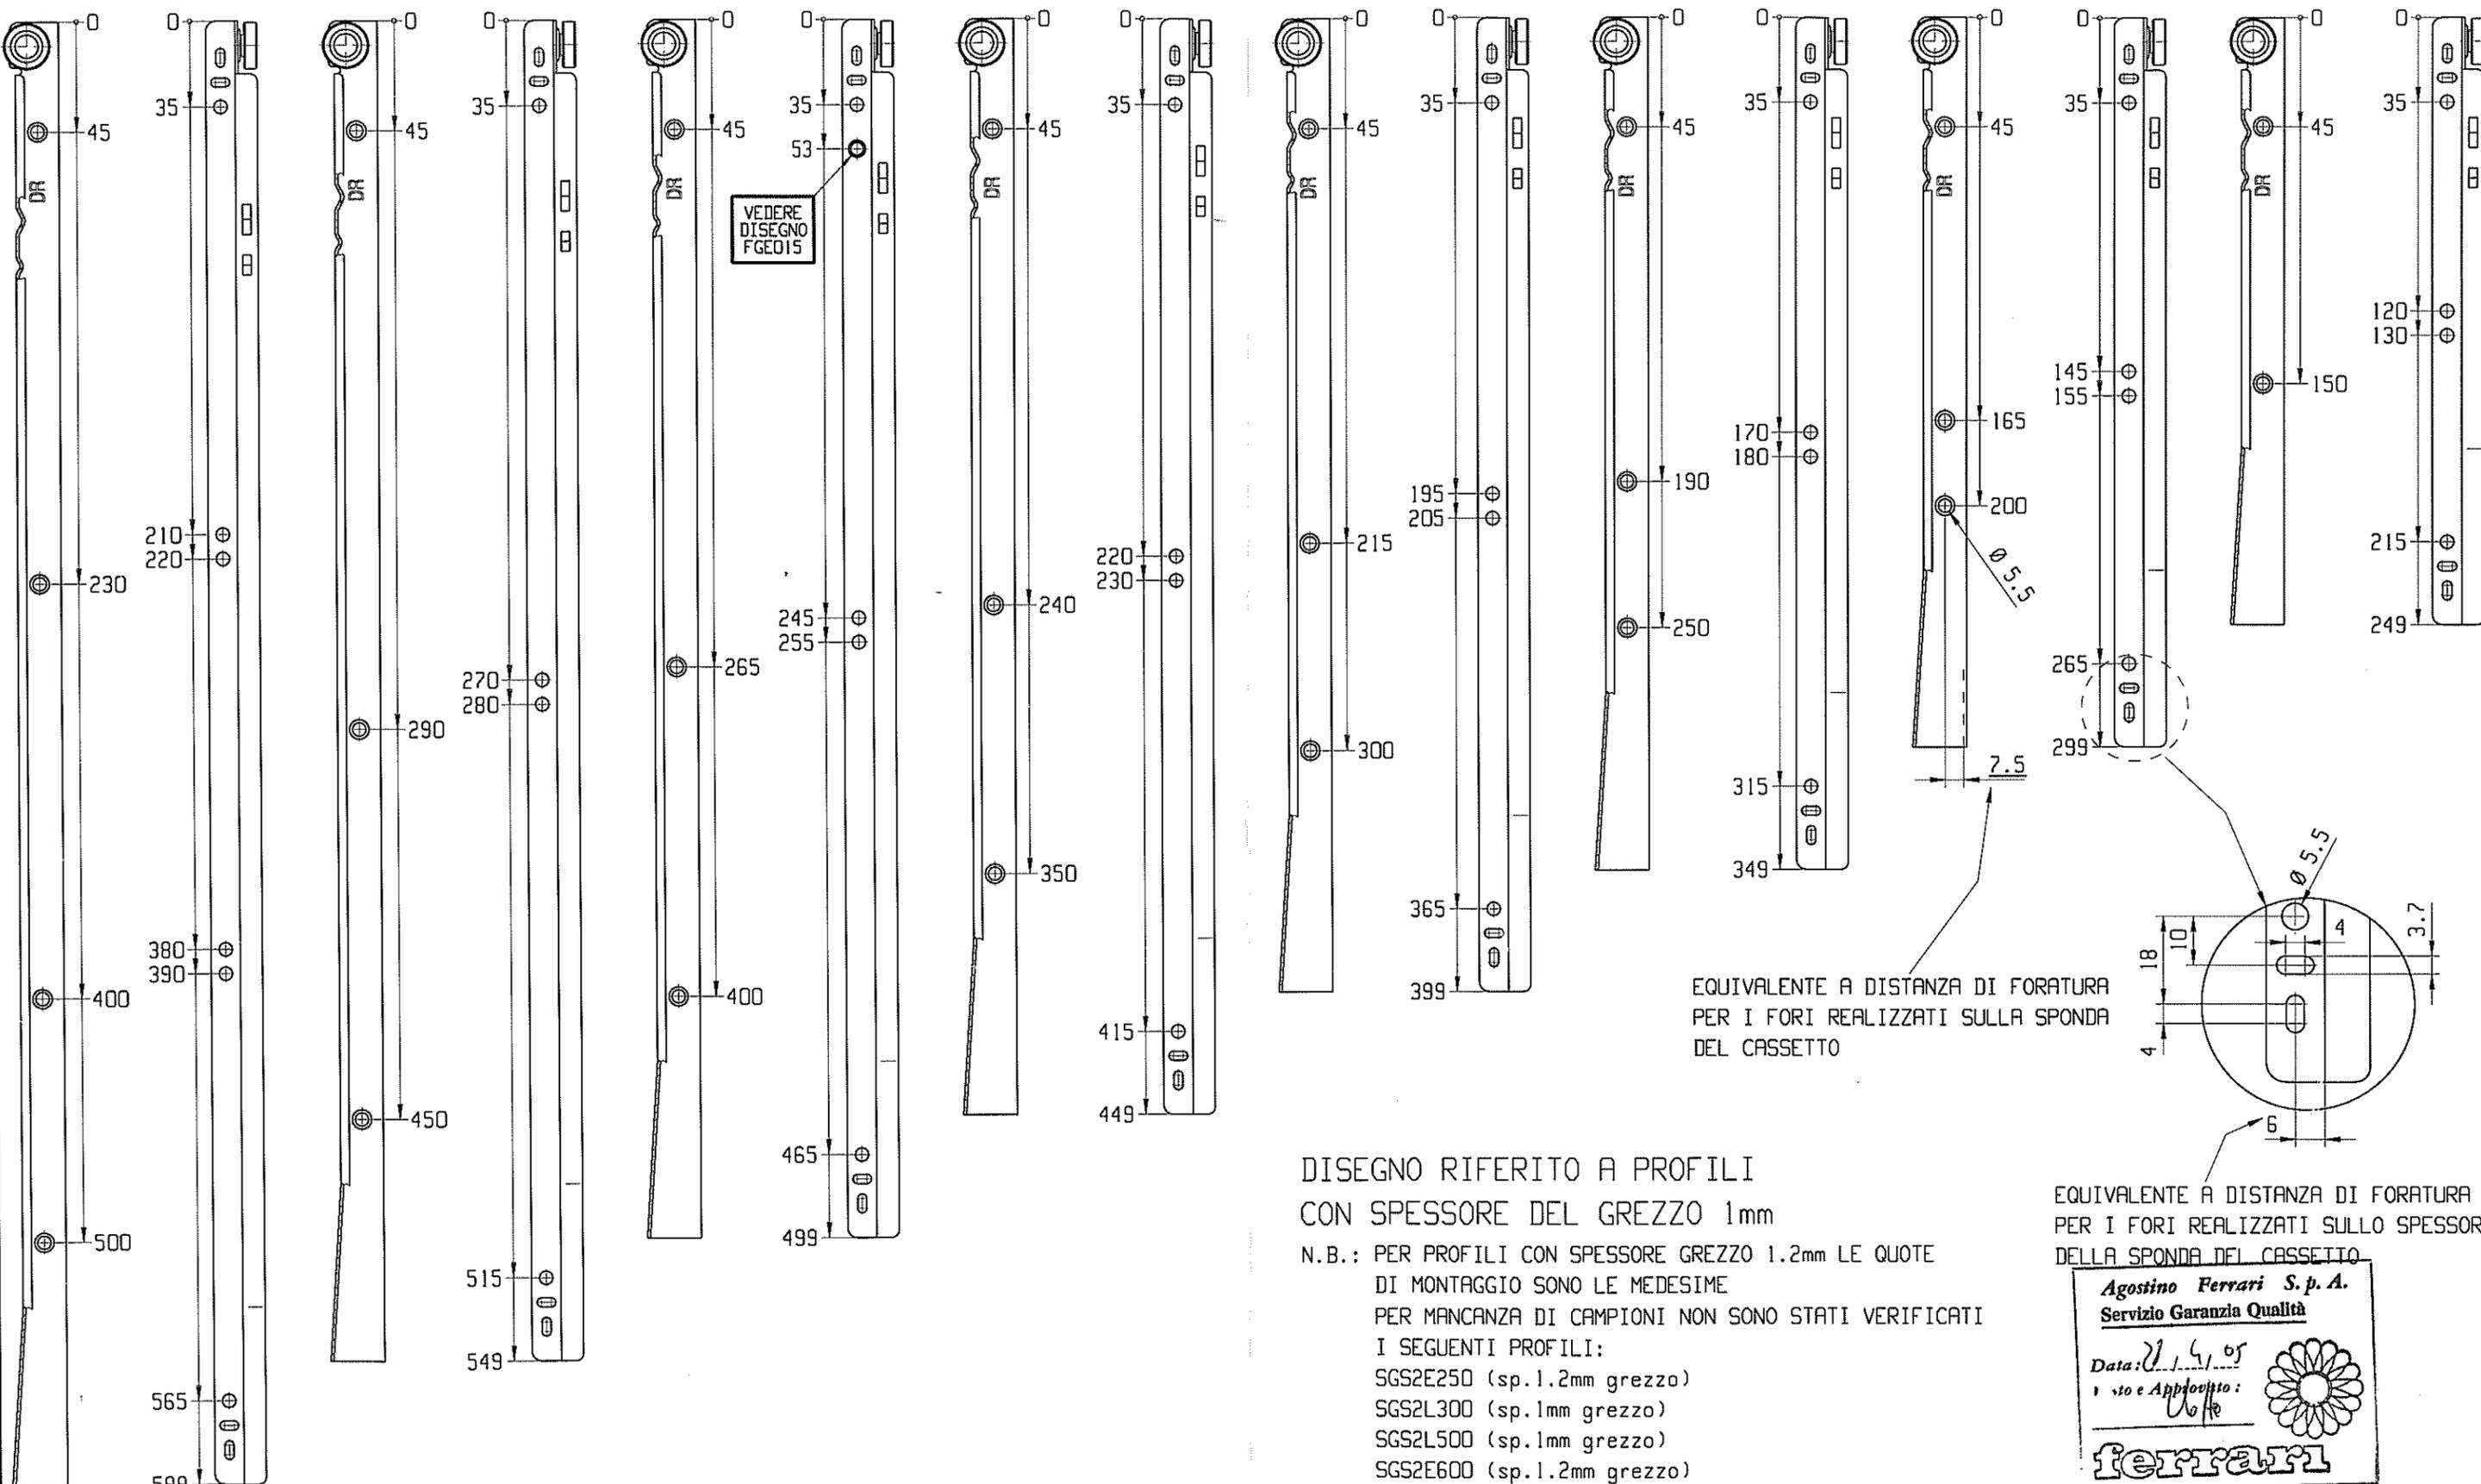

DISEGNO RIFERITO A PROFILI
CON SPESSORE DEL GREZZO 1mm

N.B.: PER PROFILI CON SPESSORE GREZZO 1.2mm LE QUOTE
DI MONTAGGIO SONO LE MEDESIME
PER MANCANZA DI CAMPIONI NON SONO STATI VERIFICATI
I SEGUENTI PROFILI:
SGS2E250 (sp.1.2mm grezzo)
SGS2L300 (sp.1mm grezzo)
SGS2L500 (sp.1mm grezzo)
SGS2E600 (sp.1.2mm grezzo)

EQUIVALENTE A DISTANZA DI FORATURA
PER I FORI REALIZZATI SULLO SPESSORE
DELLA SPONDA DEL CASSETTO

Agostino Ferrari S.p.A.
Servizio Garanzia Qualità

Data: 21/4/05
Disegnato e Approvato: [Signature]

ferrari

ferrari Codice FSG015
AGOSTINO FERRARI S.p.A.

data 30/11/01 scala 1:2.5 rev. A
dis. [Signature] modifica AGGIUNTO FORO A 53 SU L=500

SCHEMA DI FORATURA PER PROFILI AL CASSETTO CON FISSAGGIO VITI
(QUOTE VALEVOLI PER IL PROFILO DESTRO E SINISTRO)



SIMPLY






UNI EN ISO 9001

Single extension steel drawer set



- Steel drawer set with drawer sides 149 mm height
- Single extension
- No toxic epoxy coating
- Self-closing at 60 mm
- Load capacity of 25 kg
- Vertical and lateral adjustment for front panel
- Steel back panel available on request

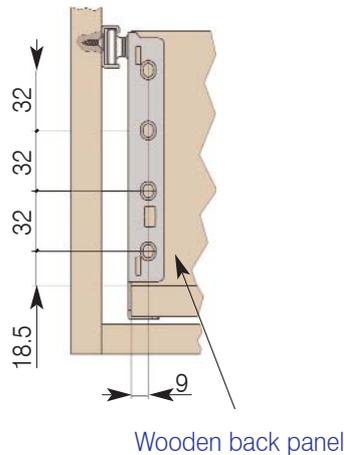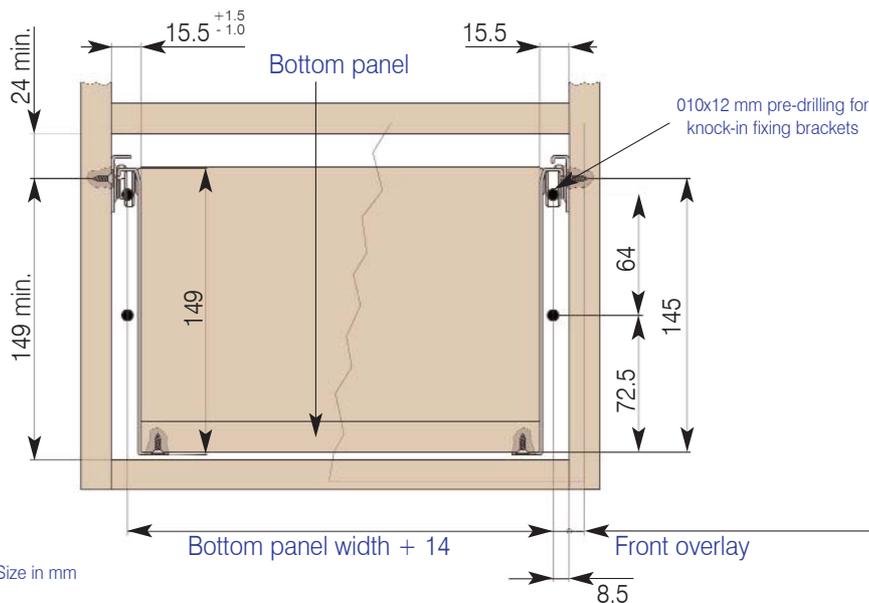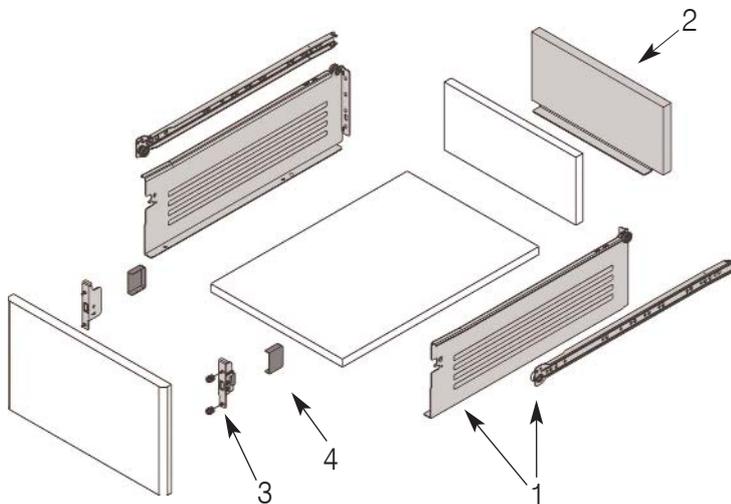

Ferrari hold the right to alter or amend any technical or structural specifications at any time without notice

ITALY

Agostino Ferrari S.p.a.
 I - 23878 Verderio S. (LC) Via per Cornate
 Tel. + +39.039.59001 - Fax + +39.039.5900222
 Web Site://www.ferrarispa.it - e-mail: ferrarispa@ferrarispa.it

U.S.A.

Ferrari America INC.
 4189 Eagle Hill Drive - Suite 110 - High Point - North Carolina - 27265 - U.S.A.
 Tel. 001 336 8411445 - Fax 001 336 8413543
 Web Site://www.ferrariamerica.com - e-mail: info@ferrariamerica.com

GREECE

Ferrari Greece LTD
 101 Syngrou Avenue - 11745 Athens -Greece
 Tel. 0030 210 9211838 - Fax 0030 210 9211836
 e-mail: ferrarinikos@internet.gr

GERMANY

Agostino Ferrari Germany GMBH
 Im Meisenfeld 5 - 32602 Vlotho - Exter Germany
 Tel. 0049 5228 96080 - Fax 0049 5228 960824
 Web Site://www.ferrari-fittings.de - e-mail: ferrari@ferrari-fittings.de

U.K.

Agostino Ferrari (UK) LTD Units H & L
 Strawberry Street Industrial Estate HU9 1EN Hull East Yorkshire - U.K.
 Tel. 0044 1482 594450 - Fax 0044 1482 594455
 Web site://www.aferrariuk.com - e-mail: info@aferrariuk.com

SIMPLY






UNI EN ISO 9001

Single extension steel drawer set

1 Drawer set: steel drawer sides and cabinet slides


Steel drawer side for screws fixing

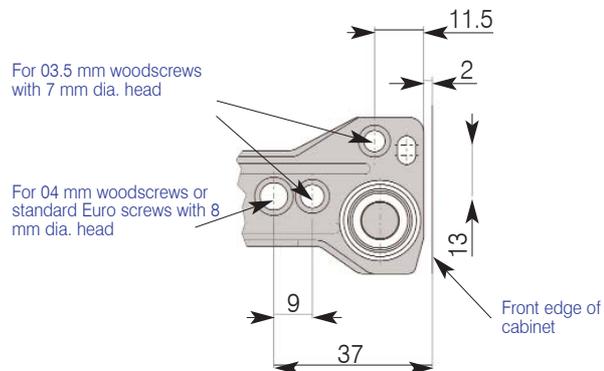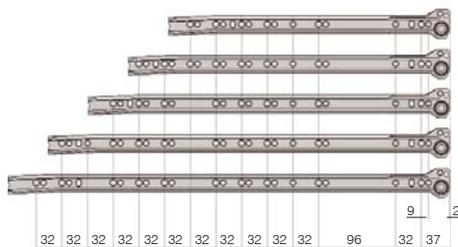

* = Finish
 1 = RAL 9001 (Cream white) 9 = RAL 7004 (Light grey)
 0 = RAL 9010 (White-white) C = RAL 9006 (Metalized grey)

H	Drawer length	Screw-on set code	H	Drawer length	Screw-on set code	H	Drawer length	Screw-on set code	H	Drawer length	Screw-on set code
86	270	Z1V1V2701S2	118	270	Z1V2V2701Z2	150	270	Z1V3V2701Z2	200	270	Z1V4V2701Z2
86	300	Z1V1V3001S2	118	300	Z1V2V3001Z2	150	300	Z1V3V3001Z2	200	300	Z1V4V3001Z2
86	350	Z1V1V3501S2	118	350	Z1V2V3501Z2	150	350	Z1V3V3501Z2	200	350	Z1V4V3501Z2
86	400	Z1V1V4001S2	118	400	Z1V2V4001Z2	150	400	Z1V3V4001Z2	200	400	Z1V4V4001Z2
86	450	Z1V1V4501S2	118	450	Z1V2V4501Z2	150	450	Z1V3V4501Z2	200	450	Z1V4V4501Z2
86	500	Z1V1V5001S2	118	500	Z1V2V5001Z2	150	500	Z1V3V5001Z2	200	500	Z1V4V5001Z2
86	550	Z1V1V5501S2	118	550	Z1V2V5501Z2	150	550	Z1V3V5501Z2	200	550	Z1V4V5501Z2
86	600	Z1V1V6001S2	118	600	Z1V2V6001Z2	150	600	Z1V3V6001Z2	200	600	Z1V4V6001Z2

2 Steel back panel

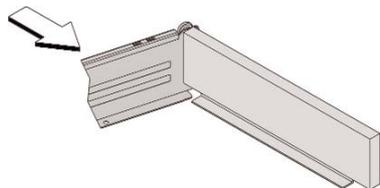

Available upon request

3 Front fixing brackets

Standard

Steel nickel plated

	A1RV##G	Per viti a legno Ø3.5x15 mm For Ø3.5x15 mm woodscrews
	A1RN##G	Con nottolini Ø10x11.5 mm With dowels Ø10x11.5 mm

= Position
 DX = Right
 SX = , Left

4 Cover caps

For standard brackets	A1CR*
-----------------------	-------

1	RAL 9001
2	RAL 7004

Ferrari hold the right to alter or amend any technical or structural specifications at any time without notice

ITALY
 Agostino Ferrari S.p.a.
 I - 23878 Verderio S. (LC) Via per Cornate
 Tel. ++39.039.59001 - Fax ++39.039.5900222
 Web Site://www.ferrarispa.it - e-mail: ferrarispa@ferrarispa.it

U.S.A.
 Ferrari America INC.
 4189 Eagle Hill Drive - Suite 110 - High Point - North Carolina - 27265 - U.S.A.
 Tel. 001 336 8411445 - Fax 001 336 8413543
 Web Site://www.ferrariamerica.com - e-mail: info@ferrariamerica.com

GREECE
 Ferrari Greece LTD
 101 Syngrou Avenue - 11745 Athens -Greece
 Tel. 0030 210 9211838 - Fax 0030 210 9211836
 e-mail: ferrarinikos@internet.gr

GERMANY
 Agostino Ferrari Germany GMBH
 Im Meisenfeld 5 - 32602 Vlotho - Exter Germany
 Tel. 0049 5228 96080 - Fax 0049 5228 960824
 Web Site://www.ferrari-fittings.de - e-mail: ferrari@ferrari-fittings.de

U.K.
 Agostino Ferrari (UK) LTD Units H & L
 Strawberry Street Industrial Estate HU9 1EN Hull East Yorkshire - U.K.
 Tel. 0044 1482 594450 - Fax 0044 1482 594455
 Web site://www.aferrariuk.com - e-mail: info@aferrariuk.com





BALL BEARING SLIDES H 45 mm




Ball Bearing slides, height 45 mm
 Full extension, guiding double tracks, stop in opening
 Mounting in the drawer side
 Load capacity: 100Lbs - 45kg
 Finish: zinc-plated (other finishing are available on request)
 Length: from 10 to 36 Inches

MOUNTING SCHEME

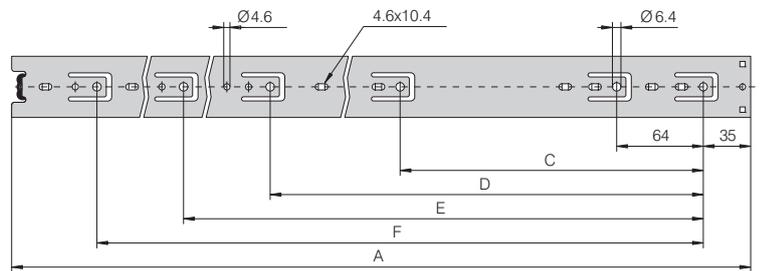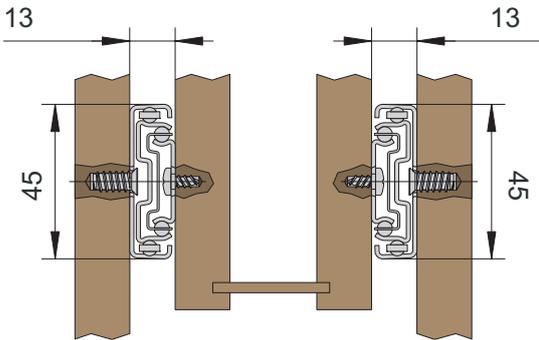

A	COD.	L	C	D	E	F	XC	Q	R
254	BB250F45RI	238	148				254	176	
305	BB300F45RI	289	224				305	96	224
356	BB350F45RI	340	224				356	128	256
406	BB400F45RI	390	224	288			406	160	320
457	BB450F45RI	441	224	352			457	160	352
508	BB500F45RI	492	224	352	416		508	192	416
559	BB550F45R	543	224	352	416		559	224	448
610	BB600F45RI	594	224	352	480		610	256	512
660	BB650F45RI	644	224	352	544		660	288	576
711	BB700F45RI	695	224	352	544		711	288	576
762	BB750F45RI	746	224	352	512	640	762	288	608
813	BB800F45RI	797	224	352	512	640	813	320	672
864	BB850F45RI	848	224	352	608	736	864	352	736
914	BB900F45RI	898	224	352	608	736	914	352	736

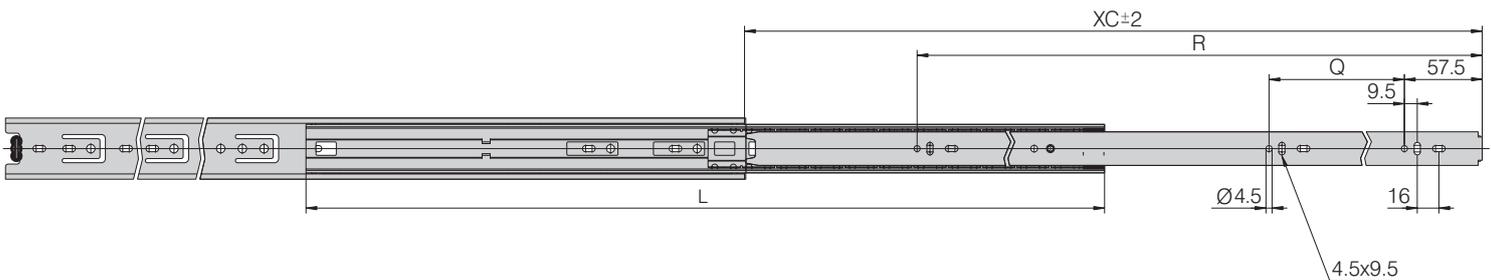

Per ulteriori informazioni rivolgersi a: **ITALY:** Agostino Ferrari S.p.a.
 23878 Verderio S. (LC) Via per Cornate - Italy
 Tel. ++39.039.59001 Fax ++39.039.5900222
 Web Site://www.ferrarispa.it
 e-mail: ferrarispa@ferrarispa.it


USA: Ferrari America INC
 4189 Eagle Hill Drive, Ste. 110
 High Point, NC 27265
 Phone: 800-664-4872
 Fax: 800-406-2224



Ball Bearing drawer slides




Soft closing ball bearing drawer slides h 45 mm, full extension

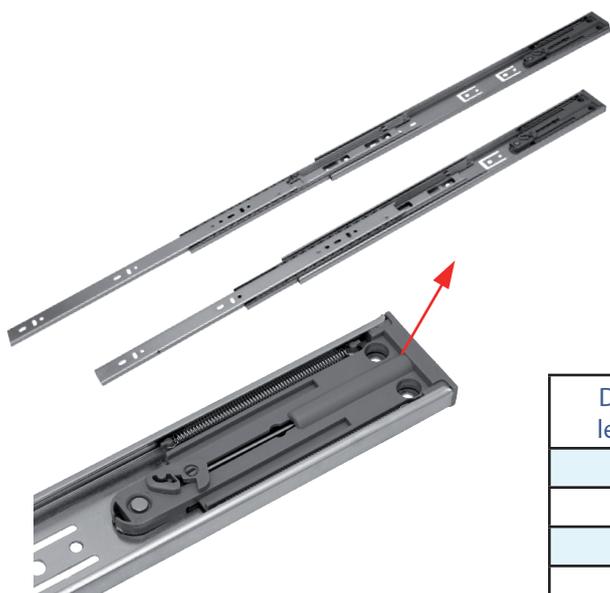

- Mounting on drawer side
- Separable cabinet and drawer profiles for mounting
- Guiding double tracks, stop in opening
- Load capacity 45 kg per set

Drawer lengths	Code
14"	BBD014F45RI
16"	BBD016F45RI
18"	BBD018F45RI
20"	BBD020F45RI
22"	BBD022F45RI
24"	BBD024F45RI
26"	BBD026F45RI
28"	BBD028F45RI

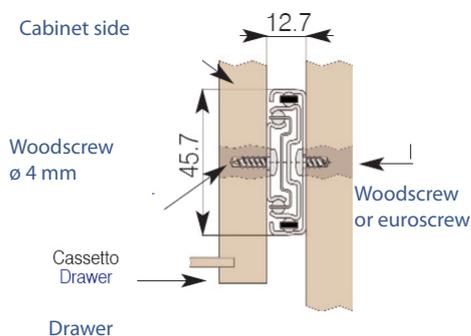

Cabinet profile and drawer profile must be separated when mounting. Expand slide, place it on its side and pull black lever as shown in order to separate the profiles.
 Slide the two profiles into the respective wood parts.
 Mount the drawer by inserting profiles inside one another.




Full-extension, concealed drawer slides

- Self closing with soft-close dampening
- For 5/8" maximum drawer side thickness
- 75 lb. dynamic capacity




Components required to mount one drawer

1 Order one set of slides to match the drawer length



Drawer length	Code Number
21" 533mm	HCBAF533V6
18" 457mm	HCBAF457V6
15" 381mm	HCBAF381V6
12" 305mm	HCBAF305V6




Sets include a pair of front locking devices that connect the drawer to the slides.

(6) sets per carton

2 Order 2 sockets


Required for face frame cabinets



Non-handed
G-280

(400) per carton

Slide mounting specifications

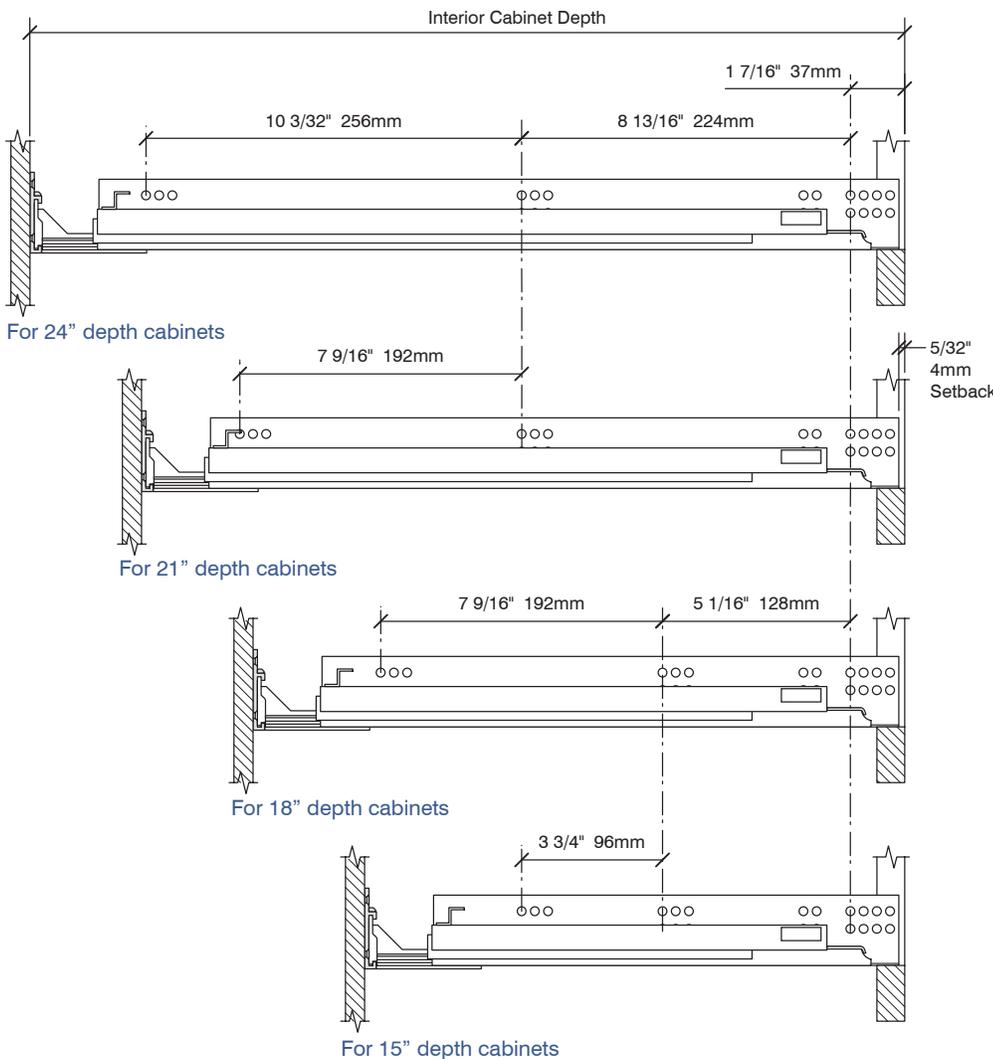

21" drawer 533mm

Face frame interior cabinet depth:
 23 1/2" 597mm Max.
 22 1/4" 565mm Min.
 Frameless interior cabinet depth:
 21 7/8" 555mm Min.

18" drawer 457mm

Face frame interior cabinet depth:
 20 1/2" 520mm Max.
 19 1/4" 489mm Min.
 Frameless interior cabinet depth:
 18 7/8" 479mm Min.

15" drawer 381mm

Face frame interior cabinet depth:
 17 1/2" 444mm Max.
 16 1/4" 413mm Min.
 Frameless interior cabinet depth:
 15 7/8" 403mm Min.


12" drawer 305mm

Face frame interior cabinet depth:
 14 1/2" 368mm Max.
 13 1/4" 337mm Min.
 Frameless interior cabinet depth:
 12 7/8" 327mm Min.

Drawer construction and installation




1 Calculate drawer size from cabinet opening

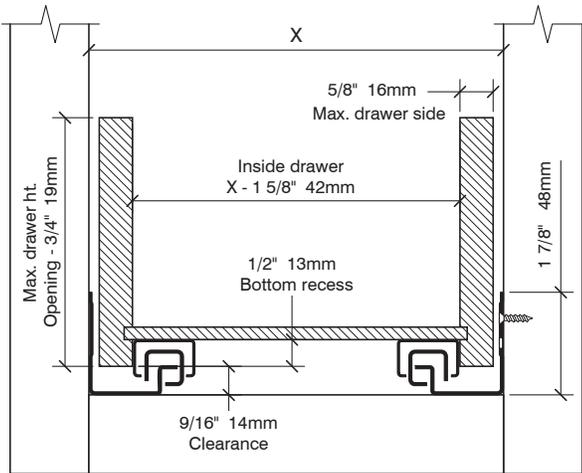

Important:


Inside drawer dimension needs to be accurate to fit over drawer slides.
 Drawer length limited to: 21" 533mm, 18" 457mm, 15" 381mm & 12" 305mm.

3 Bore rear hook holes




4 Install locking devices

Attach to drawer front with #6 x 1/2" pan head screws



5 Install rear sockets - Face frame cabinets only

1. Project the inside corner of the face frame on to the cabinet back
2. Mark the centers for the screws
3. Attach with #6 FH screws

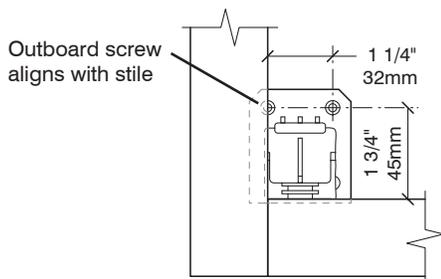


2 Build the drawer

Two construction techniques


Standard

Four sided box with decorative front attached to the front of the drawer

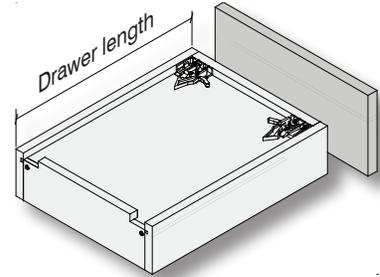


Interior roll-out drawer

Four sided box with integral drawer front
IMPORTANT: Overall drawer length: 21", 18", etc. includes drawer front




Notch drawer back for slide clearance



6 Mount slides to cabinet

1. Insert slide into rear socket (face frame only)
2. Position slide 5/32" back from the cabinet face
3. Attach with #7 FH screws or Euro screws in pre-bored Ø5mm holes

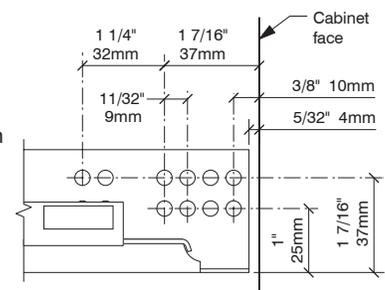

ID: FCDS-V3-081909