

# MITER SAWS & ACCESSORIES



**FESTOOL**

## Sliding Compound Miter Saw

- Festool Model #: Kapex KS120
- Special cutting depth: 4-23/32" x 3/4"
- Flexible, removable dust hood to the rear of the blade deflects the waste material in the directional dust port.
- Fully adjustable dual line lasers define the cut are for precise cut placement
- MMC allows you to match the speed of the blade with the requirements of the material
- Oversized bevel scale facilitates precision angle setting
- FastFix saw blade changing system for easy blade change
- Includes: 60 tooth high quality carbide blade (495388), MiterFast angle transfer device, Hold down clamp and Wrench

**Packing & Sold In:** Each

| Item#    | Cutting Depth 90°/90° | AMP 120V) | Speed             | Left Miter | Right Miter | Weight  |
|----------|-----------------------|-----------|-------------------|------------|-------------|---------|
| FJ561287 | 12" x 3-15/32"        | 13.0      | 1,400 - 3,400 RPM | 50°        | 60°         | 47 lbs. |

## Circular & Miter Saw Accessories

Note: For use with Festool® TS55EQ & TS75EQ Circular Saws and Kapex KS120 Miter Saw.

**Packing & Sold In:** Each


A



B



C

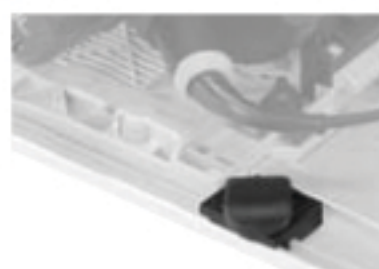

|   | Description                                                                                                                                                                                                                                                                                                                                                                       | Item#    |
|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| A | <b>Parallel Edge Guide</b> <ul style="list-style-type: none"><li>• Designed for use with Festool Circular Plunge Saw.</li><li>• Create parallel cuts from an edge.</li><li>• Can be used on both sides of the saw.</li><li>• Rip capacity from the blade side to 11-13/16" (300mm) and on the motor side to 3-3/4" (95mm).</li></ul> NOTE: For use with FJ561174 (TS 55 EQ) only. | FJ491469 |
| B | <b>Splinterguard</b> <ul style="list-style-type: none"><li>• Off-cut side and integrated rail splinter guard.</li><li>• Plastic splinter guards for FJ56114 (TS 55 EQ) and FJ561188 (TS 75 EQ).</li><li>• Splinter free cross cuts in a single pass.</li></ul>                                                                                                                    | FJ491473 |
| C | <b>Limit Stop</b> <ul style="list-style-type: none"><li>• Set stop points on the guide rail for repeat cuts and plunge cuts.</li><li>• Adjustable placement along the entire rail, reduces kickback.</li></ul> NOTE: For use with FJ561174 (TS 55 EQ) and FJ561188 (TS 75 EQ) only.                                                                                               | FJ491582 |

**FESTOOL**