

RECESSED ANSI SWITCH



◆ U.L. Listed 

◆ Optimum Concealment Application

◆ One Inch Gap On S.P.D.T.


◆ 36" Jacketed Cable Lead, Custom Lengths Available

◆ Easy Install Replaces standard ANSI Stainless Steel Door Plate

◆ Covert Installation Enhances Resistance To Tampering Or Compromise



229

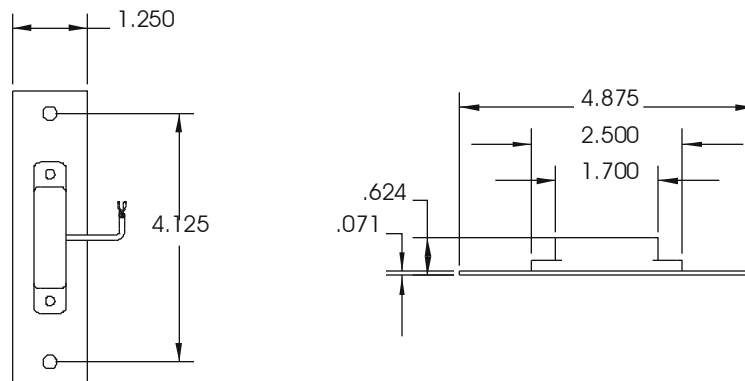

GRI products meet or exceed these minimum general specifications:

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC)	MAXIMUM SWITCHING CURRENT (A)
229	Open/Closed	SPDT	C	.140	5	175 VDC	.250
229PD	Open/Closed	DPDT	C	.140	5	175 VDC	.250

WARRANTY:

Lifetime warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.
GRI PLAZA
KIMBALL, NE 69145



MADE IN U.S.A.

TOLL-FREE 1-800-445-5218

TOLL-FREE 1-800-523-1227

(308) 235-4645

FAX (308) 235-3561

E-MAIL: grisales@megavision.com

WEB SITE: www.grisk.com