


Häfele Rafx Installer Kit

ixconnect

- > For quick, accurate drilling of Rafx 20, Rafx-SE 32 and Rafx 20 Flush systems
- > Can also be used to drill 5 mm system holes in side panels

→ **Kit**

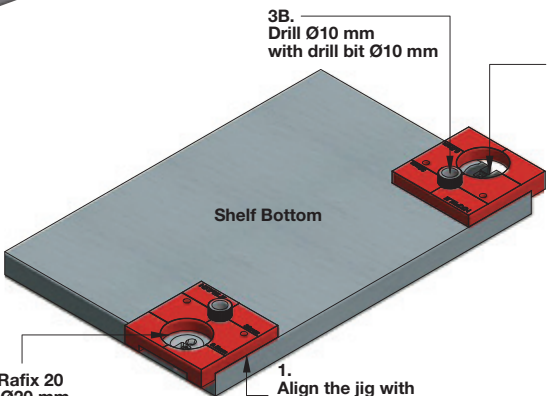

	Item No.
	001.25.639
Supplied with	Item No.
Rafx drill guide	001.25.630
Rafx depth gauge	001.28.750
Drillbit Ø20 x 139 RH	001.24.425
Stop ring Ø10 shank	001.42.693

→ **Drillbit Ø10 mm, optional**

- > For Rafx SE-32
- > 10 mm x 139 mm, RH
- > Material: Carbide

	Item No.
	001.24.319

→ **Drillbit Ø5 mm Hex, optional**




	Item No.
	001.20.505

→ **Drillbit Ø20 mm Countersunk, optional**

- > For Rafx 20 Flush
- > 20 mm x 139 mm, RH
- > Material: Carbide

	Item No.
	001.24.426

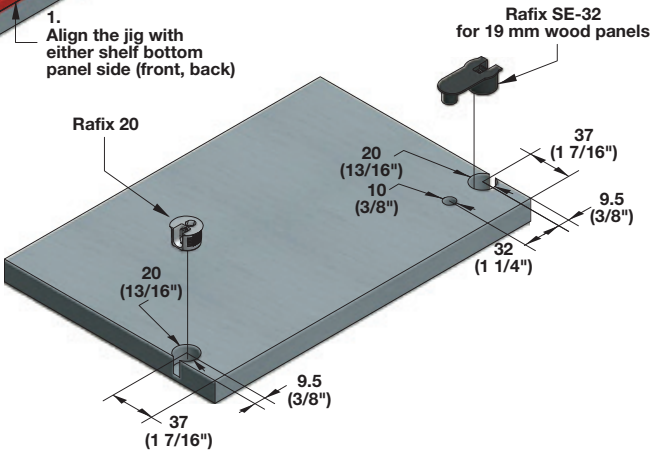

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

K Push Tech Concealed

→ Drilling Jig



- > For material thickness 16 mm (5/8") and 18 mm (3/4")
- > 1 mm and 1.5 mm shim included
- > Material: Aluminum/Steel

Color	Item No.
red	356.12.090


→ Drillbit



- > Ø10 mm (3/8")
- > Material: Carbide

Item No.
001.24.319

→ Stop Ring



- > Ø10 mm (3/8")
- > Material: Steel

Item No.
001.42.693

Specialty Bits

→ Vix Bit



- > Self-centering
- > Adjustable for depth
- > Material: Steel

For use with	Item No.
#2, #3 and #4 screws 5/64" bit	001.42.061
#5 and #6 screws 7/64" bit	001.42.030
#14 screws 13/64" bit	001.42.020
#8, #9 and #10 screws 9/64" bit	001.42.060

→ Forstner Style Drill Bit



- > Length: 139 mm
- > Material: Carbide

Description	Item No.
*10 (25/64")	001.24.319
*12 (15/32")	001.24.489
*15 (19/32")	001.24.443
*20 (25/32")	001.24.425
*20 (25/32") countersunk	001.24.426

Note

*Can be used with red jig on page 11.29.

→ Wave Cutter Drill Bit



Description	Item No.
20 (25/32")	001.04.156
35 (1 3/8")	001.04.157