



Confa 35

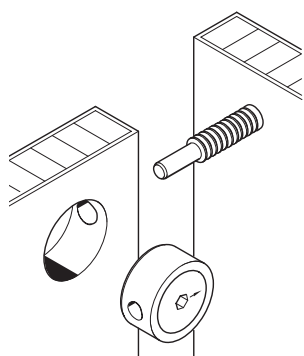

ixconnect

- > For very sturdy and heavily loaded joints
- > Long travel distance
- > Quickly tightened
- > Can be tightened with 6 mm hex key
- > A cordless drill can be used for quick assembly


→ **Recessed Universal Connector**

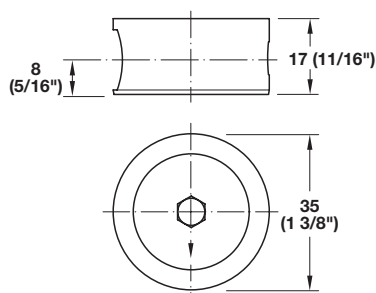

- > Material: Housing: Zinc die-cast
- Tightening element: Steel, unfinished

Wood thickness	Dimension A mounting center	Drilling depth	Item No.
From 24	1/2 wood thickness	1/2 wood thickness + 8	262.69.009

→ **Connecting Bolt**

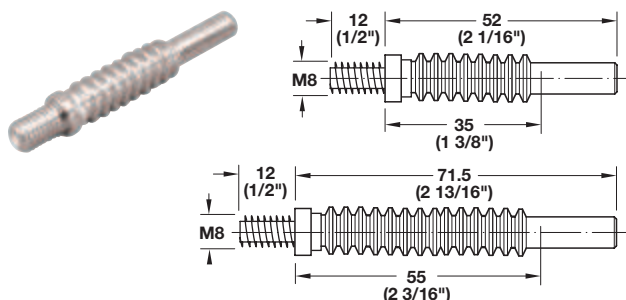


- > With M8 thread
- > Ø:10.5 mm
- > Material: Steel; Finish: zinc-plated

Drilling distance	Item No.
35	262.69.036
55	262.69.045

The connecting bolts on this page can be used with the following parts:

→ **M8 Screw Socket**



- > With screw slot
- > Material: Steel, unfinished

Outer Ø	Inner Ø	Length	Item No.
14	11.5	15	030.00.404
16	12	18	030.00.422

→ **Hex Key**



- > 6 mm
- > Material: Steel

Finish	Item No.
zinc-plated	008.28.268