



Confirmat

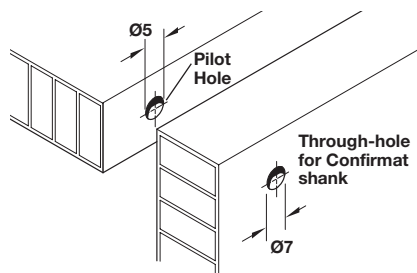

- > Extremely strong
- > With tip for easy insertion into blind hole
- > Countersink is not necessary as the ribs countersink hole

→ Self-Countersinking Connector

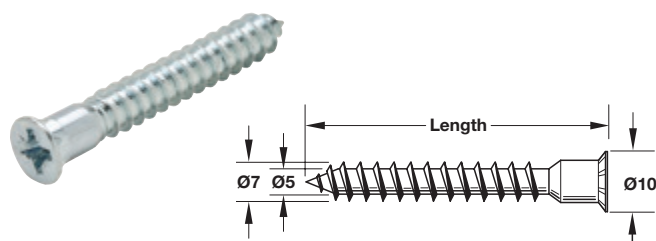


- > With pointed tip
- > Shank: Ø7 mm (9/32")
- > Head: Ø10 mm (3/8")
- > Material: Steel; Finish: zinc-plated

Length	 Pozi drive size 3	 Hex socket head 4 mm
50 (2")	264.44.190	264.43.164
70 (2 3/4")	264.44.194	-

Supplied With 1000 pcs.

→ Countersunk Connector

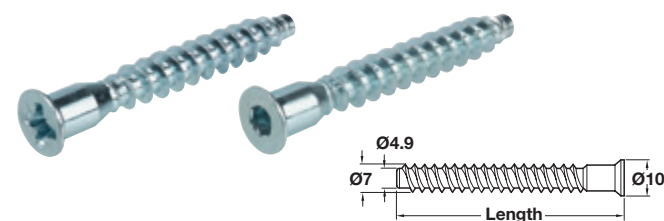


- > Drill hole: Ø5 mm (3/16")
- > Shank: Ø7 mm (9/32")
- > Head: Ø10 mm (3/8")
- > Material: Steel

Finish	Length	 Pozi drive size 3	 Hex socket head 4 mm
zinc-plated	40 (1 5/8")	264.42.091	-
zinc-plated	50 (2")	264.42.190	264.43.600
bronzed	50 (2")	264.42.133	264.43.130
black	50 (2")	-	264.43.111
zinc-plated	70 (2 3/4")	264.42.291	-

Supplied With 1000 pcs.

→ Self-Countersinking Connector

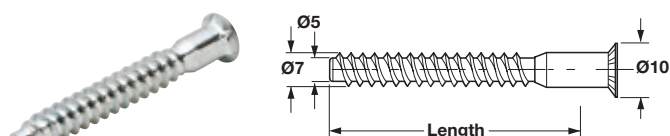

- > With tapered tip
- > Drill hole: Ø5 mm (3/16")
- > Shank: Ø7 mm (9/32")
- > Head: Ø10 mm (3/8")
- > Material: Steel; Finish: zinc-plated

Length	 Pozi drive size 3	 Hex socket head 4 mm
50 (2")	264.44.180	264.43.160

Supplied With 1000 pcs.

→ Trim Caps



- > Press-fit in Confirmat head
- > Material: Plastic

Color	 Ø12 (15/32")	 Ø15 (9/16")	 Ø12 (15/32")
white	045.01.704	045.01.713	045.01.731
pine	045.01.008	-	-
black	045.01.302	045.01.311	045.01.339
almond	045.01.455	-	-

Supplied With 1000 pcs.

→ Step Bits



- > For Confirmat installation
- > Material: HSS

Size	Item No.
148.5L 4/5/8	001.22.663
150L 5/7/10	001.22.645