

Wall Anchors

→ Self-Drilling Drywall Anchors



- > Installs quickly and easily with Phillips or Square drive screwdriver
- > Self-driving, pre-drills own small precise hole in gypsum wallboard
- > Deep thread design provides strong engagement in 10, 13 and 16 mm (3/8", 1/2", 5/8") wallboard
- > Removable, can be easily backed out
- > Accepts #8 screw size
- > Hangs up to 50 lbs. shear strength
- > Nylon version is non-conductive and corrosion resistant
- > Material: Steel or Nylon

Finish	Item No.	Packing	Item No.	Bulk
Steel/zinc	051.18.027	100 pcs.	051.18.028	2,500 pcs.
Nylon/white	051.18.036	100 pcs.	051.18.037	2,500 pcs.

→ Self-Drilling E-Z Toggle




- > Includes a #8 x 2 1/8" long screw
- > Hangs up to 85 lbs. shear strength
- > Install with a #2 Phillips screwdriver
- > Material: Steel

Finish	Item No.
zinc	051.17.911

Supplied With
50 pcs.

→ SnapSkru® Self-Drilling Drywall Anchors

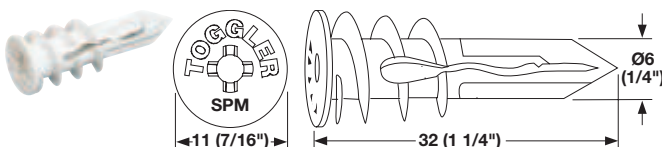

- > Unique "Snap Lock" feature provides the positive behind-the-wall locking and holding power of a toggle bolt
- > Creates only a 6 mm (1/4") hole
- > Accepts #6 through #8 screws
- > Holds up to 95 lbs. in 16 mm (5/8") drywall
- > Screw Ø: #6 (preferred), #7 and #8
- > Screw minimum length: 25 mm (1") plus the thickness of the item being anchored
- > Minimum drywall thickness: 10 mm (3/8")
- > Maximum drywall thickness: 16 mm (5/8")
- > Minimum clearance behind wall for anchor: 16 mm (5/8") behind 13 mm (1/2") drywall; 13 mm (1/2") behind 16 mm (5/8") drywall
- > Material: Injection Molded Nylon

Color	Item No.
white	051.18.040

Supplied With
100 pcs.

Note
Holding value per anchor with a #6 x 1 1/4" screw.

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Consumables and Tools