


SYMO 3000 Modular Removable Core Locking System



→ Deadbolt Rim Lock

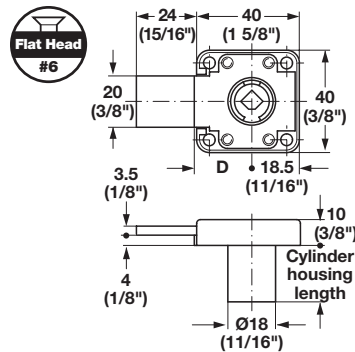

- > Long bolt travel
- > For cylinder cores that are inserted from the front on-site
- > Backset D: 25 mm (1")
- > Bolt travel: 24 mm (15/16")
- > Screw mounted
- > Material: Zinc Alloy; Finish: nickel-plated

Handing	Cylinder housing length	Item No.
Left	22 (7/8")	232.25.610
Right	22 (7/8")	232.25.600
Drawer version	22 (7/8")	232.25.620
Drawer version	32 (1 1/4")	232.25.680


→ Deadbolt Rim Lock

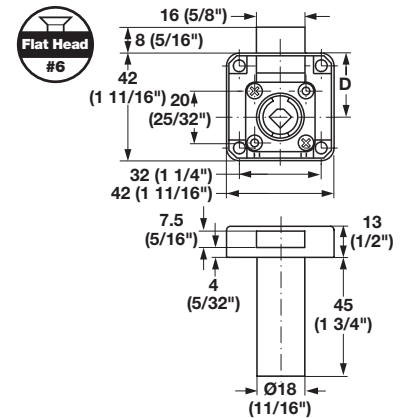

- > For cylinder cores that are inserted from the front on-site
- > Backset D: 25 mm (1")
- > Cylinder housing length: 45 mm (1 3/4")
- > Screw mounted
- > Material: Zinc Alloy; Finish: nickel-plated

Handing	Item No.
Left	232.26.612
Right	232.26.602
Drawer version	232.26.622


→ Deadbolt Rim Lock

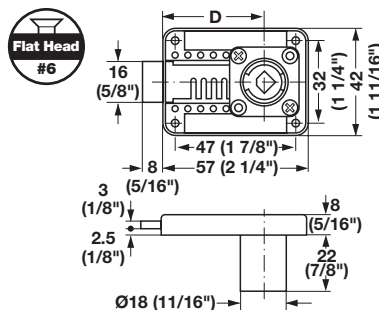

- > With adjustable backset
- > For cylinder cores that are inserted from the front on-site
- > Backset D: 15–40 mm (5/8"–1 9/16") (adjustable in steps of 5 mm (3/16"))
- > Handing convertible to left or right
- > Screw mounted
- > Material: Zinc Alloy

Finish	Item No.
nickel-plated	232.26.690

→ Inlaid Lock



- > For cylinder cores that are inserted from the front on-site
- > Backset D: 20 mm (25/32")
- > Handing: drawer version
- > Screw mounted
- > Material: Zinc Alloy

Finish	Item No.
nickel-plated	230.28.620

Lock cores	pages 10.24–10.25
Flat head screws	pages 12.7–12.8, 12.10, 12.13

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.