


SYMO 3000 Modular Removable Core Locking System, Gang Locks

→ Central Locking Cylinder, side mount

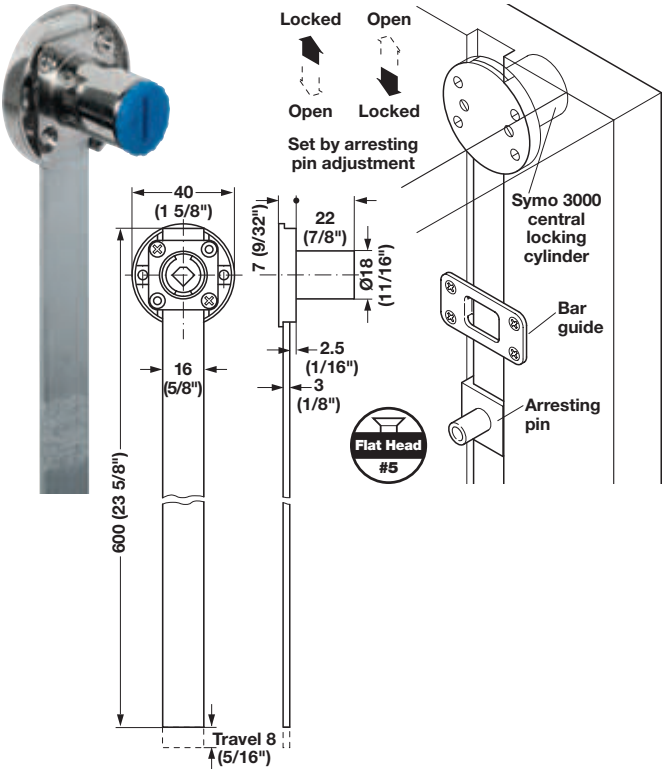

- > With bar
- > For cylinder cores that are inserted from the front on-site
- > Closure direction: 180°
- > Bar length: 600 mm (23 5/8")
- > Travel: 8 mm (5/16")
- > Screw mounted
- > Material: Cylinder: Zinc Alloy; Bar: Aluminum


Finish

nickel-plated

Item No.

237.48.600

→ Central Locking Push-Button Cylinder, front mount

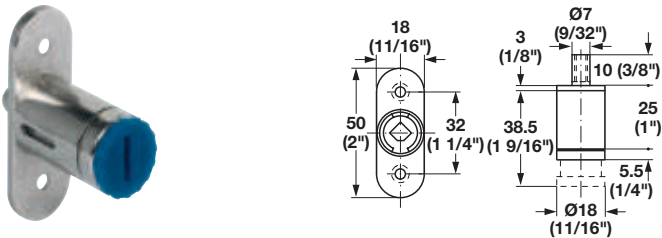

- > For cylinder cores that are inserted from the front on-site
- > Closure direction: 180°
- > With internal M5 thread in locking pin for use with central locking accessories
- > Screw mounted
- > Material: Zinc Alloy

Finish

nickel-plated

Item No.

234.65.600

→ Locking Sleeve



- > For SYMO 3000 push-button cylinder
- > Accommodates the locking pin
- > Mounts in drilled hole
- > Material: Brass

Finish

nickel-plated

Item No.

234.59.994

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Lock cores	pages 10.24–10.25
Accessories	pages 10.30–10.31
Flat head screws	pages 12.7–12.8, 12.10, 12.13