


Five-Knuckle Hinge

Opening angle: **270°**



- > Industry standard 70 mm (2 3/4") five-knuckle hinge
- > Hospital tips and corners for safety
- > Non-removable knurled pin
- > Tumbled to remove sharp edges
- > Tested in accordance with ANSI/BHMA
- > Free-swing hinges require a catch for proper closing, see recommendation below

→ Grade 1 Hinge

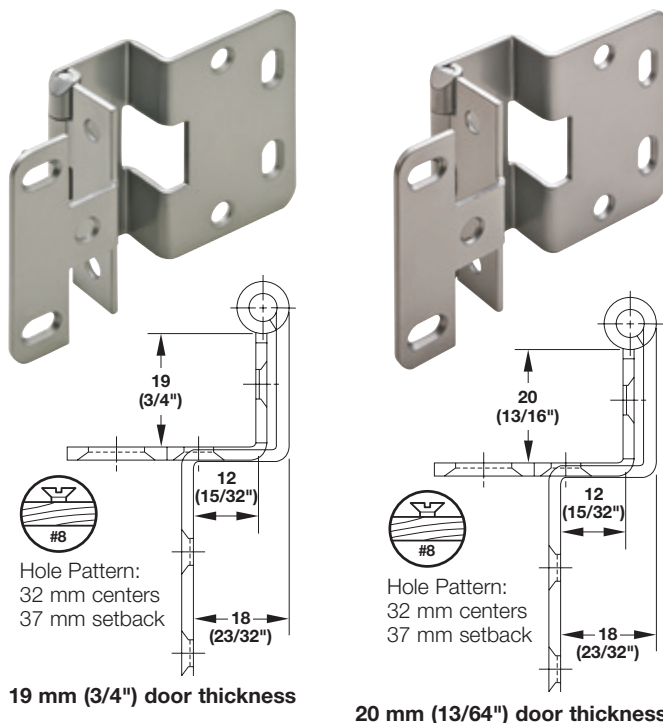

- > Door thickness: 19 mm (3/4")
- > Material: .090" Steel

Finish	Import	Domestic
chrome powder-coated	354.65.220	354.65.435
black powder-coated	354.65.320	-
chrome-plated dull 26D	354.65.420	354.65.430

- > Door thickness: 20 mm (13/16")
- > Material: Steel


Finish	Import	Domestic
chrome powder-coated	354.65.221	-
black powder-coated	354.65.321	-
chrome-plated dull 26D	354.65.421	354.65.440
stainless steel	354.65.021	354.66.000

Note

Screws not included. Hinges require #8 wood screws or 5 mm with 7.8 mm head euro screws. For use with point to point drilling equipment or if color match is critical, we recommend using the domestically manufactured hinges.

Flat head wood screws	page 12.13
Pan head screws	pages 12.9-12.10


→ Elbow Catch

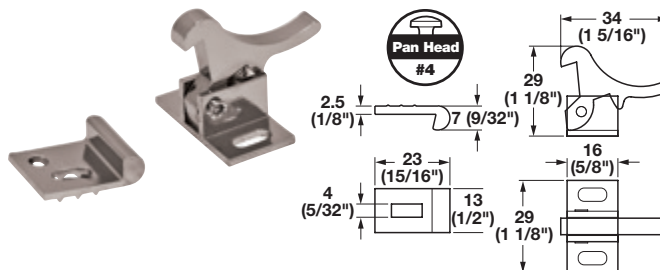

- > With oblong holes
- > Material: Brass

Finish	Item No.
chrome-plated	245.74.201

→ Magnetic Catch

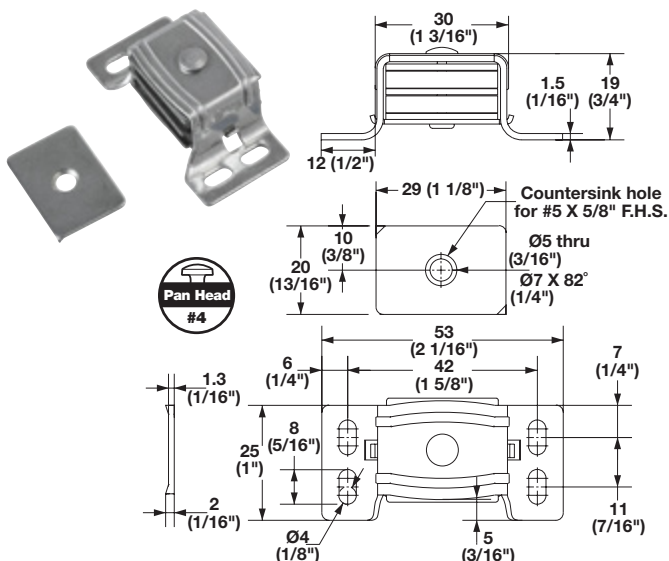

- > Screw mounted
- > Holding power: 6.8 kg (15 lbs.)
- > Material: Catch: Aluminum; Strike: Steel

Item No.
246.92.002