


Minifix® System

ixconnect

- > Connecting bolts with M6 thread for screw-attachment into dowels for single-sided installations
- > Dowels can be selected for 8 or 10 mm diameter holes

→ M200 Connecting Bolt/cold-formed

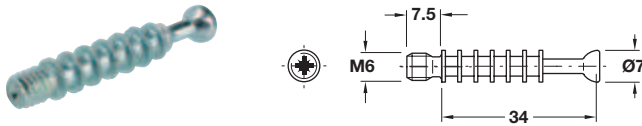

- > Drive: Pozi 2 or Phillips 2
- > Material: Steel, galvanized

	Item No.
	262.28.642

→ S100 Connecting Bolt/turned




- > Material: Steel, galvanized

B	Item No.
24	262.27.949
34	262.28.946

The connecting bolts above can be used with the following parts:


→ Spreading Dowel

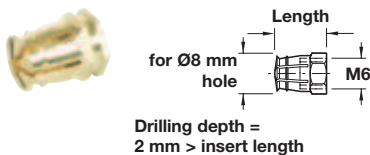

- > With M6 internal thread
- > Material: Brass, bright

Length	Item No.
9	039.00.267
12 w/nylon ball	039.00.061

→ Glue-in Dowel



- > With M6 internal thread
- > Length: 11 mm
- > Material: Nylon; Color: natural

Drilled hole Ø	Item No.
8	039.33.462
10	039.33.266

The connecting bolt on left can be used with the following parts:


→ S100 Connecting Bolt/turned



- > Connecting bolt, with M4 thread for screw attachment into dowels or sleeves for single or double-sided installations
- > Sleeves or dowels can be selected for holes between Ø5, 8, or 10 mm
- > Drive: Cross-slot 2 or flat blade
- > Material: Steel, galvanized

B	Item No.
24	262.27.930
34	262.28.937

→ Glued Dowel



- > With M4 internal thread
- > Material: Nylon

Color	Item No.
natural	039.33.042


→ Spreading Dowel




- > With M4 internal thread
- > Material: Brass, bright

	Item No.
	051.45.004

→ Trim Cap

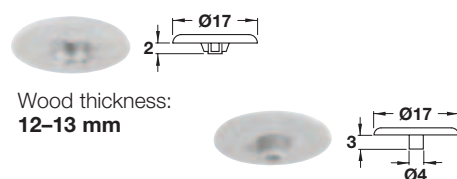

Wood thickness:
12-13 mm



Wood thickness:
16, 19, 23, & 29 mm

- > For Minifix® cams without flanged rims.
- > Material: Plastic

Wood thickness	white	pine	brown	gray	black
12-13	-	-	262.24.162	-	-
16, 19, 23, & 29	262.24.751	262.24.055	262.24.153	262.24.525	262.24.359