



**Häfele Minifix® System**

ixconnect

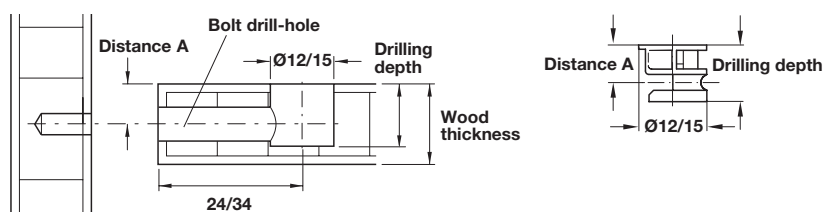

→ **Minifix® 12 Cam**

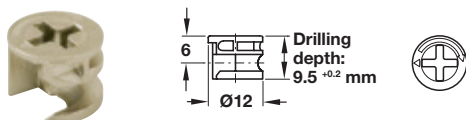

- > Can be locked only with a cross-slot screwdriver size 2
- > Without flanged rim
- > Wood thickness: from 12 mm
- > Material: Zinc, die-cast

| Wood thickness | Distance A<br>Center locking position | Drive                      | Drilling depth | unfinished | nickel-plated |
|----------------|---------------------------------------|----------------------------|----------------|------------|---------------|
| From 12        | 6.0                                   | PZ2 cross slot, flat blade | 9.5+0.2        | 262.17.020 | 262.17.620    |

→ **Minifix® 15 Cam**



- > Without flanged rim
- > Material: Zinc die-cast

| Wood thickness | Distance A<br>Center locking position | Drive      | Drilling depth | unfinished | nickel-plated | black      |
|----------------|---------------------------------------|------------|----------------|------------|---------------|------------|
| 12             | 6.0                                   | PZ2 cross  | 9.5+0.2        | 262.26.070 | 262.26.570    | -          |
| 13             | 6.5                                   | slot, flat | 11.0+0.2       | 262.26.031 | 262.26.531    | 262.26.351 |
| 16             | 8.0                                   | blade      | 12.5+0.5       | 262.26.033 | 262.26.533    | 262.26.353 |
| 19             | 9.5                                   | or SW4     | 14.0+0.5       | 262.26.035 | 262.26.535    | 262.26.355 |
| 23             | 11.5                                  | hexagon    | 16.5+0.5       | 262.26.036 | -             | 262.26.356 |
| 29             | 14.5                                  | socket     | 19.5+0.5       | 262.26.038 | -             | 262.26.358 |

→ **Minifix® 15 Cam**



- > With flanged rim
- > Material: Zinc die-cast

| Wood thickness | Distance A<br>Center locking position | Drive                      | Drilling depth | unfinished | nickel-plated | black      |
|----------------|---------------------------------------|----------------------------|----------------|------------|---------------|------------|
| 16             | 8.0                                   | PZ2 cross slot, flat blade | 12.5+0.5       | -          | 262.25.533    | -          |
| 19             | 9.5                                   | or SW4 hexagon socket      | 14.5+0.5       | 262.25.035 | 262.25.535    | 262.25.355 |

**Note** All the connecting bolts shown on pages 11.21-11.22 can be used with these zinc die-cast cams.