

Minifix® System

ixconnect

→ S100 Connecting Bolt



> Material: Steel

Thread length L	Drilling distance B	unfinished	galvanized
8	24	-	262.27.920
8	34	-	262.28.920
15	24	-	262.27.832
15	34	-	262.28.839
11	24	262.27.029	-
11	34	262.28.026	-
11	24	-	262.27.921
11	34	-	262.28.928


→ S100 Connecting Bolt/turned



> Drilling distance: 34 mm
> Material: Steel, unfinished

	Item No.
	262.28.188

→ End Screw




> With M4 thread
> Can be used as end bolt
> Material: Steel

Finish	Item No.
nickel-plated	020.92.711

Supplied With
2000 pcs.

→ S200 Econo S Bolt/cold-formed

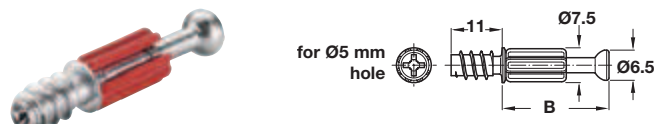

> Drive: Pozi 2 or Phillips 2
> Polystyrene sleeve prevents sagging and allows bolt to revolve freely during installation
> Material: Steel, galvanized

Drilling distance B	unfinished	zinc-plated
24	262.27.670	262.27.679
34	262.28.670	262.28.679


→ M200 Connecting Bolt/cold-formed



> Thread length 11 mm standard
> Drive: Pozi 2 or Phillips 2
> Material: Steel, galvanized

B	Item No.
24	262.27.627
34	262.28.624

→ Sleeve, smooth



> With M4 internal thread
> Suitable for double-sided installations
> Material: Steel, galvanized

Length	Item No.
15	267.00.911
18	267.00.912
22	267.00.913

