


Minifix® System

ixconnect


→ Capped Bolt/cold-formed

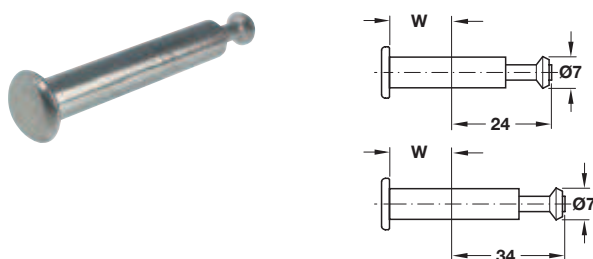

- > For Ø8 mm holes
- > Material: Steel

Panel thickness W	Drilling distance	nickel-plated	bronzed
16	24	-	262.27.154
	34	262.28.755	-
19	24	262.27.765	262.27.163
	34	262.28.765	262.28.160


→ Double-Ended Bolt/turned

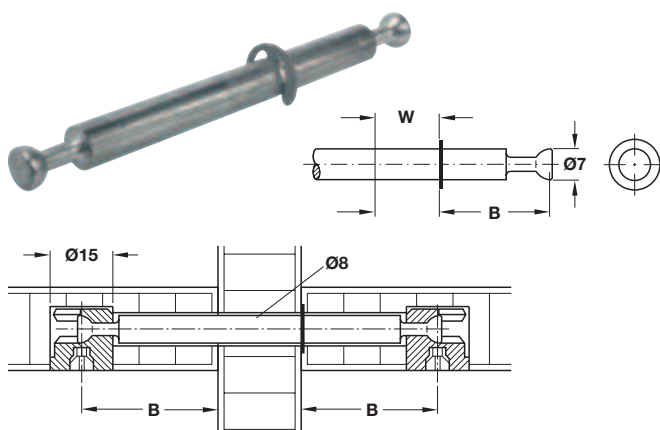

- > With snap ring
- > For Ø8 mm holes
- > Material: Steel; Finish: zinc-plated

Panel thickness W	Drilling distance B	Item No.
16	34	262.28.802
19	24	262.27.814
	34	262.28.811

→ Double-Ended Bolt/turned

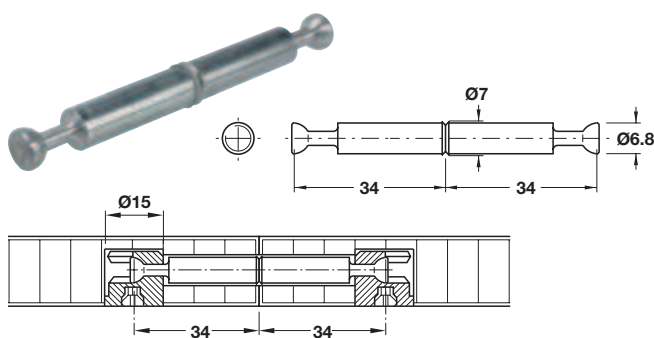

- > With center ring
- > For butt joints using Ø7 mm holes
- > To eliminate up and down movements, 7 mm pilot holes are recommended
- > Drilling distance: 34 mm
- > Material: Steel

Finish	Item No.
zinc-plated	262.28.786