



Häfele Rafx System

ixconnect

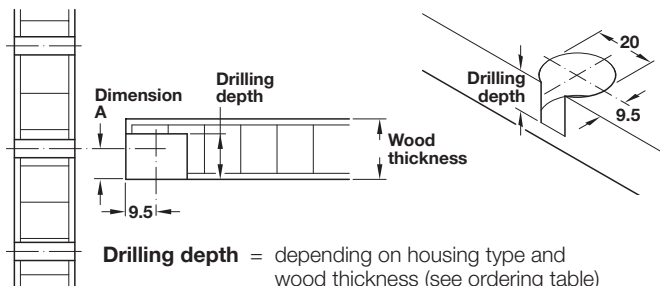


Drilling depth = depending on housing type and wood thickness (see ordering table)

Dimension A = 1/2 of the wood thickness (see ordering table)

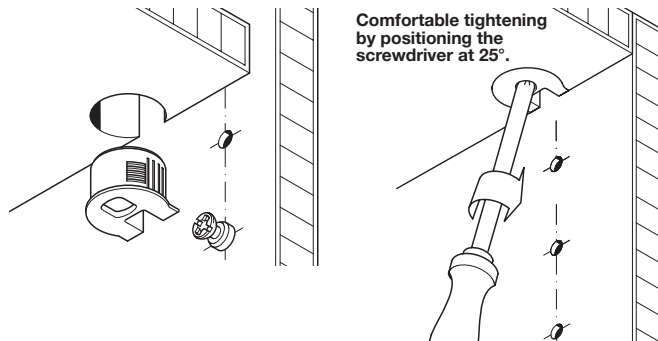

For wood thickness	Dim. A mounting center	Drilling depth
16	8.0	12.7+0.2 mm
19	9.5	14.2+0.2 mm

→ Rafx 20 Housing

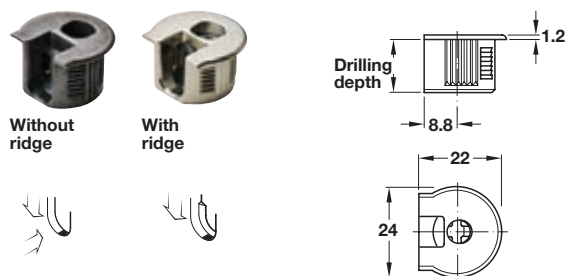


Without ridge

With ridge

- > With tightening element
- > Drive: Pozi #2
- > Material: Zinc Alloy

For wood thickness	Finish	Without ridge	With ridge
16	nickel-plated	263.11.703	263.15.703
19	nickel-plated	263.11.705	263.15.705
	bronzed	263.11.105	263.15.105

→ Rafx 20 Housing

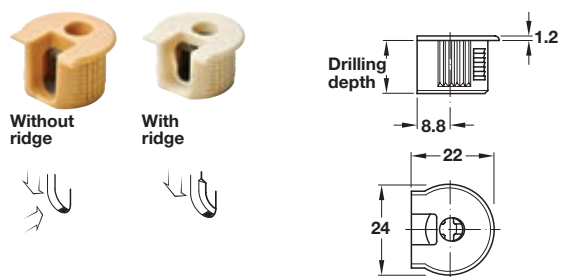


Without ridge

With ridge

- > With tightening element
- > Drive: Pozi #2
- > Material: Plastic; Tightening element: Zinc Alloy

For wood thickness	Color	Without ridge	With ridge
16	white	263.10.703	263.14.703
	beige	263.10.403	263.14.403
	brown	263.10.103	263.14.103
	black	263.10.303	263.14.303
19	white	263.10.705	263.14.705
	beige	263.10.405	263.14.405
	maple	263.10.165	263.14.106
	candlelight	263.10.125	263.14.605
	cognac	263.10.185	263.14.107
	brown	263.10.105	263.14.105
	black	263.10.305	263.14.305
	gray	263.10.205	263.14.205
	taupe gray	263.10.615	263.14.615
	stone gray	263.10.815	263.14.815
	classic gray	263.10.915	263.14.915

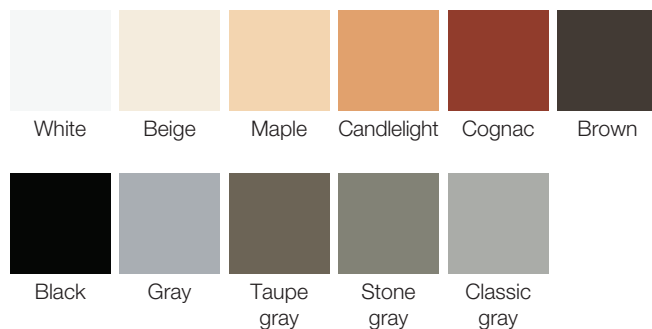

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.