


Shelf Supports

→ Support for Glass Shelves



- > Distance between supports: max. 700 mm (27 9/16")
- > For wall thickness: 1.5 mm (1/16")
- > Weight capacity: up to 85 kg (187 lbs.) per m² by evenly distributed loading on the shelf
- > Material: Support and base: Stainless Steel
Countersunk screw: Steel, galvanized
Wall anchor: Plastic
O-ring: Rubber; Color: black

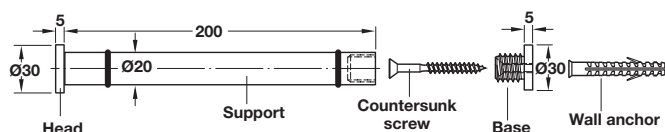

Finish

matt, brushed

Item No.

283.38.020


Supplied With

Support, Ø20 mm; Base
2 O-rings
Countersunk screw M6 x 60 mm
Wall anchor
Assembly instructions


Note

2 sets needed for one shelf.

→ 12 mm Support for Wood Shelves

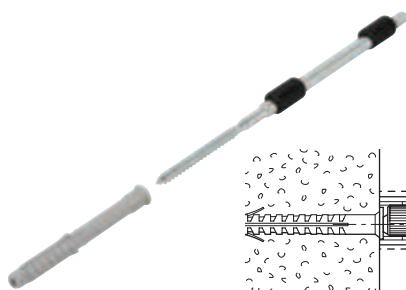

Height and level adjustment possible as shown on the right

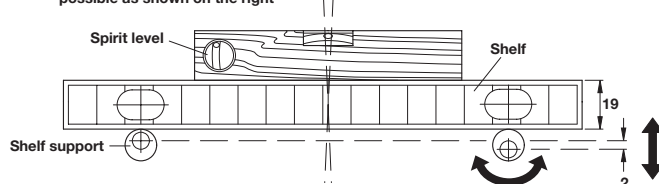

- > For invisible fastening of shelves with a 19 mm (3/4") thickness or greater
- > Adjustment without tools by turning the plastic sleeve
- > The hexagonal end on the shelf support permits installation with 6 mm (1/4") bit using a cordless drill or a 6 mm (1/4") open end or box-end wrench
- > Can be installed directly into masonry walls or woodwork
- > To make adjustments possible, the insertion hole must be laterally elongated, with a slot drilling machine or a chain mill
- > Adjust height and level, set the shelf on the shelf supports mounted in the wall and then adjust by turning the plastic sleeves
- > Press-fit type
- > Material: Steel, galvanized; Sleeves: Plastic/Polyamide

Item No.

283.32.014

Supplied With

Support bolt with wood thread
2 Sleeves, pre-mounted
Washer
Fischer structural wall anchor S 8H 80 R

