


Salice




- > For frameless cabinets
- > Can not be used with Logica or Rapido hinges

→ Mounting Plate Adapter for Smoveholder



→ Smoveholder with integrated SMOVE

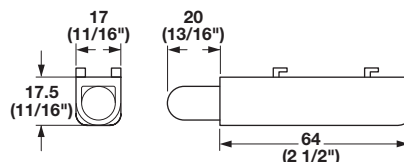


- > Soft tip prevents door marring
- > Adjustable piston and adapter thicknesses accommodate various door sizes and overlays
- > Use with most euro-style mounting plates with wings: installation requires 5 mm (3/16'') or #8 x 5/8'' screws
- > Quick and simple installation and adjustment
- > Adjust by rotating screw +/firm -/soft
- > Material: Zinc die-cast; Piston: Plastic

- > For full overlay hinges
- > Material: Zinc die-cast

For mounting plate	Model	Item No.
BAV steel	D2VX09	329.45.910
BAR die-cast	DARX09	329.45.911

→ Mounting Plate Adapter for Smoveholder




Color	For doors	Model	Item No.
black	with 2 - 3 hinges	D0SHSNG	329.45.330
orange	with 3+ hinges	D0S8SNG	329.45.501

- > For half overlay hinges
- > With steel mounting plate for wood screw mounting
- > Material: Zinc die-cast

For mounting plate	Model	Item No.
BAV Steel	D2VX99	329.45.914

→ Super SMOVE

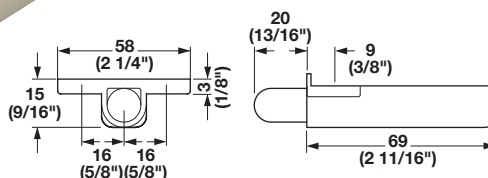

- > For use on frameless or face frame applications
- > Unhanded
- > Material: Zinc/Plastic; Color: beige

For Doors	Model	Item No.
with 2 - 3 hinges	D0LHSNG	329.45.510
with 3+ hinges	D0L8SNG	329.45.511

Note

Use on heavy doors such as pantry doors.



Loosen one screw on the mounting plate



Insert the adapter for the Smoveholder



Re-tighten the screw for the mounting plate



Apply the Smoveholder to the adapter



Rotate the screw toward the plus sign to decrease closing speed, or to the minus sign to increase closing speed