



Salice

Opening angle: **270°**

- > With height 2 mounting plate
- > Side adjustment: -3 mm – +3 mm (-1/8" – +1/8")
- > Height adjustment: + 2 mm (1/16")
- > Depth adjustment: +2.8 mm (1/8") with a height 2 mounting plate
- > Door thickness: max. 20 mm (13/16")
- > Hinges have built-in catch to stay closed
- > Magnetic catches are not required
- > Tested in accordance with ANSI/BHMA Grade 1 standards

→ Single Pivot Hinge

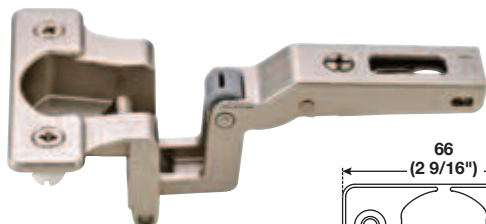

> Material: Steel; Finish: nickel-plated

Mounting	Model	Item No.
Screw	CMP3A99	329.58.600
Dowel	CMR3A99	329.58.610







Full overlay with recessed knuckle application



Partial overlay with external knuckle application



Application with inset door

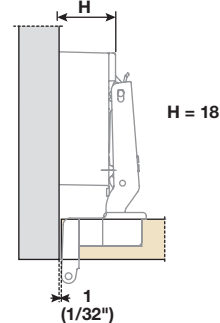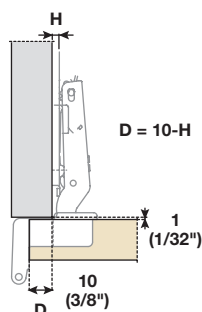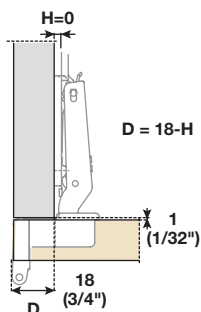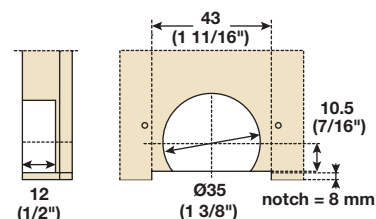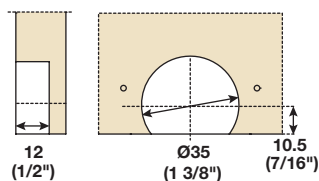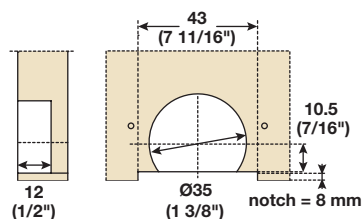

Formula to determine baseplate:
D = overlay
H = baseplate