


Salice



- > Developed for use with metal profiles
- > A Ø3.5 x 9.5 mm (#6 x 3/8") countersunk sheet metal screw to attach hinge to frame is recommended
- > To be used with aluminum doors on pages **9.181-9.182**


→ Wing Mounting Plates



- > Screw mounted
- > Spring lever
- > With independent vertical and depth adjustment
- > Material: Steel; Finish: nickel-plated

→ Hinge

Opening angle: **105°**




- > For use with profiles: 563.55.931, 563.55.031, 563.55.911
- > Screw mounted
- > Self-closing
- > Material: Steel; Finish: nickel-plated

Mounting	Hinge arm	Model	Item No.
Full overlay		C2Z6A99	329.23.610
Half overlay		C2Z6G99	329.23.630

Height	Model	Item No.
0	BAR3R09	329.71.500
2	BAR3R29	329.71.502
3	BAR3R39	329.71.503
6	BAR3R69	329.71.506
9	BAR3R99	329.71.508
12	BAR3RC9	329.71.509

→ Wing Mounting Plates

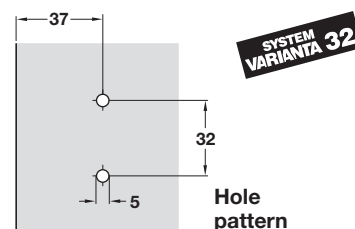

- > Screw mounted
- > Spring lever
- > With independent vertical and depth adjustment
- > with pre-installed 11 mm euro screws
- > Material: Steel; Finish: nickel-plated

Height	Model	Item No.
0	BARGR09/16	329.71.510
2	BARGR29/16	329.71.512
3	BARGR39/16	329.71.513
6	BARGR69/16	329.71.516
9	BARGR99/16	329.71.518
12	BARGRC9/16	329.71.519

→ Trim Caps



- > For hinge arm
- > Material: Plastic

Color	Model	Item No.
white	S2XX83A1	329.18.700
black	S2XX83A3	329.18.308

→ Mounting Screws



- > Self-tapping sheet metal screw for attaching hardware to aluminum frame doors
- > Phillips #7 x 1/2", CSK with undercut head
- > Material: Steel

Finish	Item No.
zinc-plated	010.94.902


Supplied With 50 pcs.

→ Wing Mounting Plates

- > For center/common panels
- > With pre-installed 7.5 mm euro screws
- > Material: Steel; Finish: nickel-plated


Height	Model	Item No.
0	BARGR09/20	329.71.530
3	BARGR39/20	329.71.533

Salice

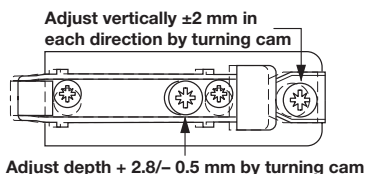

- > Automatic Adjustment Response feature: a slight turn of the depth adjustment cam or vertical cam quickly positions hinge eliminating need for manual positioning by loosening screws.


→ Clip Mounting Plate

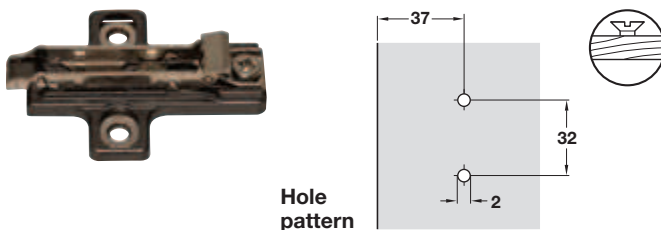

- > Screw mounted
- > Spring lever
- > With independent vertical and depth adjustment with cam
- > Material: Steel/Zinc

Height	Model	titanium	Model	nickel-plated
0	BAR3R06	329.71.507	BAR3R09	329.71.500
2	BAR3R26	329.71.582	BAR3R29	329.71.502
3	-	-	BAR3R39	329.71.503
6	-	-	BAR3R69	329.71.506
9	-	-	BAR3R99	329.71.508
12	BAR3RC6	329.71.622	BAR3RC9	329.71.509
18*	BAR3RV6	329.71.623	BAR3RV9	329.71.579
21*	-	-	BAR3RZ9	329.71.573
24*	-	-	BAR3RY9	329.71.576
27*	-	-	BAR3RU9	329.71.577
30*	-	-	BAR3RM9	329.71.578

→ Clip Mounting Plate

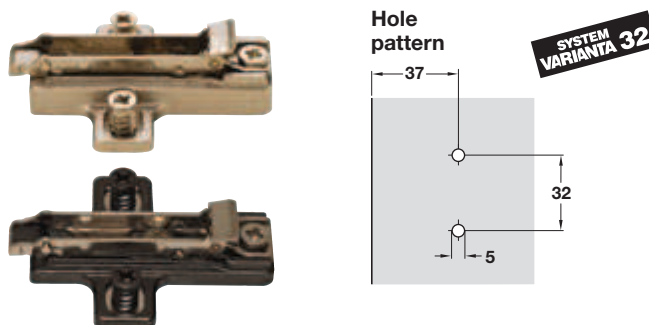

- > Screw mounted in system holes
- > Spring lever
- > Pre-installed 11 mm (7/16") euro screws
- > With independent vertical and depth adjustment with cam
- > Material: Steel/Zinc


Height	Model	titanium	Model	nickel-plated
0	-	-	BARGR09/16	329.71.510
2	BARGR26/16	329.71.562	BARGR29/16	329.71.512
3	-	-	BARGR39/16	329.71.513
6	-	-	BARGR69/16	329.71.516
9	-	-	BARGR99/16	329.71.518
12	-	-	BARGRC9/16	329.71.519
18*	-	-	BARGRV9/16	329.71.559
21*	-	-	BARGRZ9/16	329.71.553
27*	-	-	BARGRU9/16	329.71.557
30*	-	-	BARGRM9/16	329.71.558

- > For center/common panels
- > Pre-installed 7.5 mm (5/16") euro screws
- > Material: Steel/Zinc; Finish: nickel-plated

Height	Model	Item No.
0	BARGR09/20	329.71.530
3	BARGR39/20	329.71.533

Note

*Require 3rd screw #7 x 16 mm (5/8)

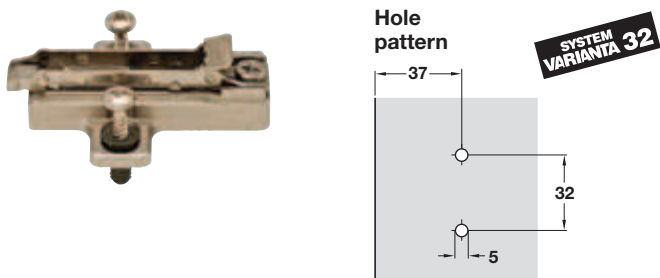

- > Mounted in system holes with expandable 5 mm (3/16") dowels
- > Spring lever
- > With independent vertical and depth adjustment with cam
- > Material: Steel/Zinc; Finish: nickel-plated

Height	Model	Item No.
0	BAR4R09/16	329.71.520
2	BAR4R29/16	329.71.522
3	BAR4R39/16	329.71.523
6	BAR4R69/16	329.71.526

Note Vertical & depth adjustments made with Pozi drive #2.

Flat head wood screws

page 12.13




Concertina



- > Door width: max. 610 mm (24") for 2 doors
- > Height adjustment: +/- 2 mm (3/32")
- > Depth adjustment: +2.5 mm (1/8")
- > Doors can be mounted to the left or right cabinet side
- > Provides excellent access to the cabinet interior
- > Concealed hinges are required; 329.17.507 (hinge) and 329.71.502 (mounting plate) are recommended
- > Minimal space of approximately 80 mm (3 1/8") is taken up by the door in the maximum open position



Note
Weight capacity depends on the number of hinges.
See chart on next page.

→ Hardware

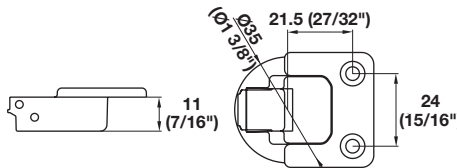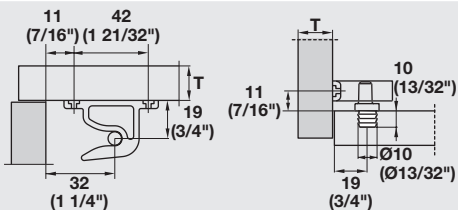	Description	Item No.
 	Hinge for sliding block	409.95.710
	Sliding block	409.95.720
	Locating device	409.95.750
 	Central hinge	354.07.710

→ Tracks

> Length: 1180 mm (46 7/16")

	Finish	Item No.
 	white	409.96.712
 	black	409.96.312

329.17.507 hinge page 9.20
329.71.502 mounting plate page 9.38