



Zysa Hinges




Opening angle: **180°**

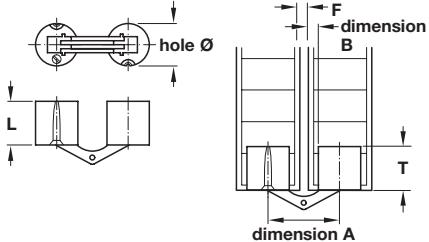


- > Can be used left or right
- > Tighten the tensioning screw to ensure a secure grip in wood
- > Additional holding power for exceptionally high loads is achieved by installing a wood screw through exposed end
- > Drilling must be extremely accurate
- > Material: Brass, matt

Wood thickness	Screw Ø	L	Hole Ø	T	A	B	F	Item No.
17-22 (11/16"-7/8")	3	13.5 (17/32")	12 (1/2")	13.5 (17/32")	20 (25/32")	2.2 (1/16")	3.5 (21/64")	341.21.520
22-28 (7/8"-1")	3.5	16.5 (5/8")	16 (5/8")	16.5 (5/8")	25 (1")	3 (1/8")	3 (1/8")	341.21.540


Butting, inset door:

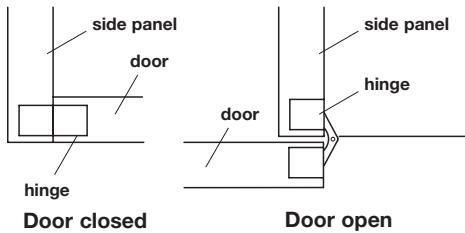


Joining two panels:

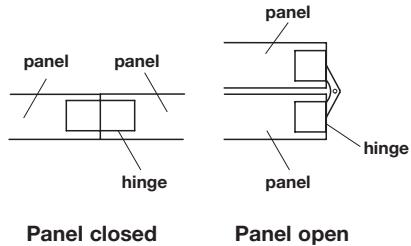


Typical folding door installation:

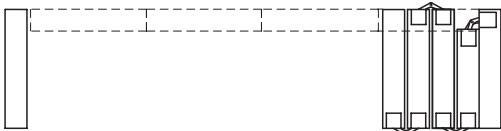

Butting, overlay door:

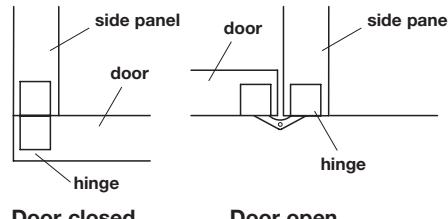

Butting overlay doors:

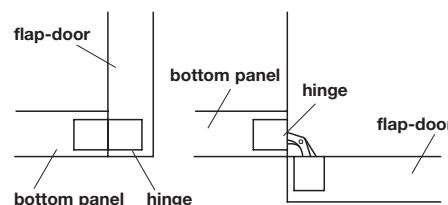

Flap-door closed Flap-door open

Hole pattern, Zysa hinges

