


Aximat® 300 Single Pivot Hinge




3D adjustment



Drilling pattern for side panel




Drilling pattern for cup

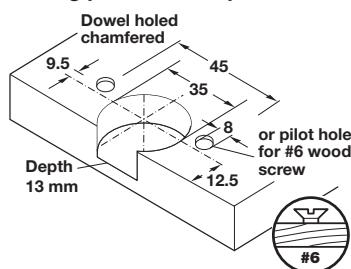


- > Sleek sophisticated design, only 5 mm (3/16") of knuckle is visible
- > Hinge arm component available with pre-installed expanding dowels for 5 mm (3/16") holes, or for screw attachment
- > Hinge cup component available in screw mount or dowel mount
- > Arm and cup clip together, no tools required
- > For side panel thickness: 19 mm (3/4")
- > For door thickness: up to 21 mm (13/16")
- > Integrated catch keeps doors closed, no additional magnetic catches required
- > For single cabinets and storage walls
- > Available in twin mounted version, 2 doors can be mounted on a single hinge on a single side panel

Note #6 wood screws for hinge attachment are not included.

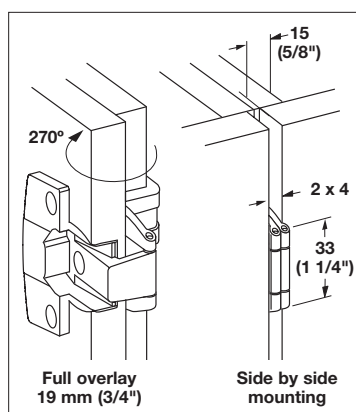


Door overlay 15 mm + knuckle 4 mm = 19 mm (3/4")

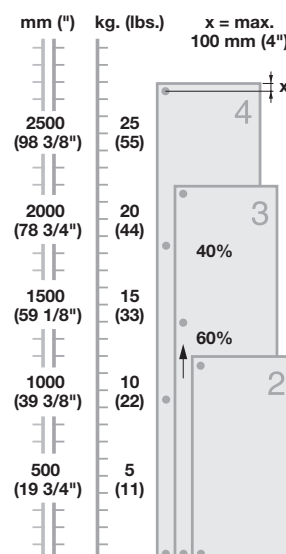

Recommended number of hinges

- > Door widths up to 600 mm (23 5/8")
- > Door width should not exceed height

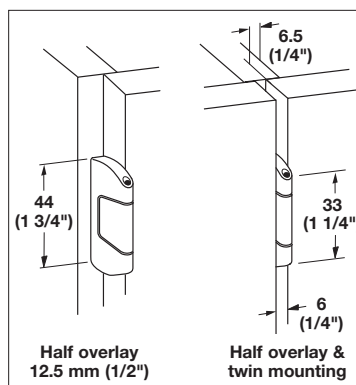

Door overlay 6.5 mm + knuckle 6 mm = 12.5 mm (1/2")

→ Cup



- > Screw mounted
- > Material: Zinc

Finish	Item No.
matt nickel	344.06.800
black	344.06.850

→ Cup for 8 mm holes



- > Dowel mounted
- > Material: Zinc

Finish	Item No.
matt nickel	344.06.810
black	344.06.860

→ Arm



- > Full overlay
- > Without screws
- > Material: Zinc

Opening angle: **270°**

Finish	Item No.
matt nickel	344.06.930
black	344.06.980

→ Arm



- > With pre-mounted expanding dowels for 5 mm (3/16") holes
- > Material: Zinc

Finish	Overlay	Opening angle	Item No.
matt nickel	full	270°	344.06.920
black	full	270°	344.06.320
	half	240°	344.06.921
matt nickel	twin	180°	344.06.902
	inset	180°	344.06.903

Note

Twin mounted version requires 2 cups.