

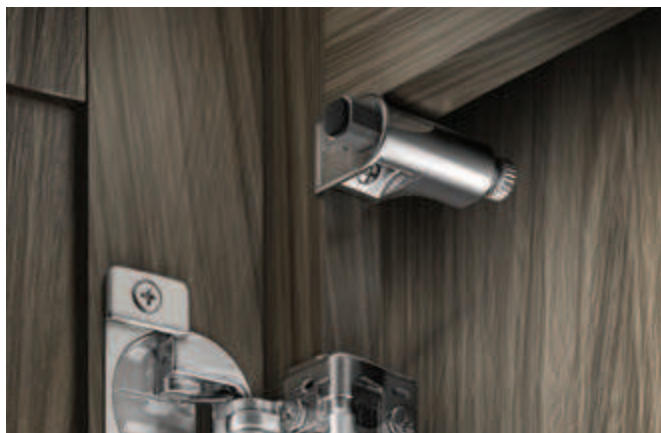


Grass Unisoft

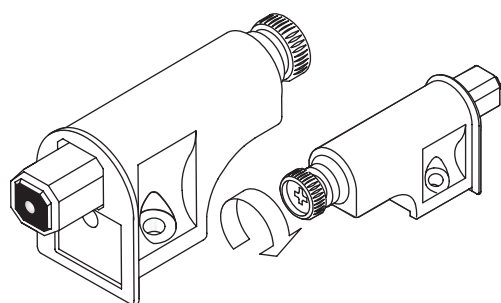

- > For face frame cabinets on all door overlays
- > For frameless cabinets on full overlay doors
- > Blends in well with hinge finish
- > Non-handed with a low profile design
- > Manually adjustable to desired closing speed
- > Easy to mount by locating in the corner
- > Has scratch protector and front bumper with cushion for a quiet close

→ Soft Close for Doors

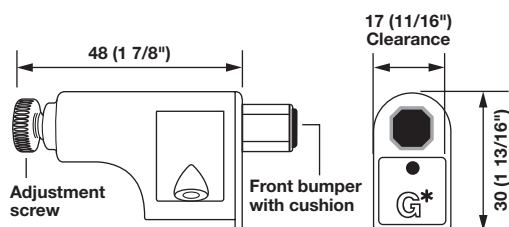

Adjustment



Turn adjustment screw to move damper in and out. Adjust in for heavier doors or out for light doors. Use Phillips or Pozi drive screwdriver or adjust manually.

Item No.	Packing
356.15.650	1
356.15.652	25

Supplied With


#6 x 3/4" Pan head screw

Mounting

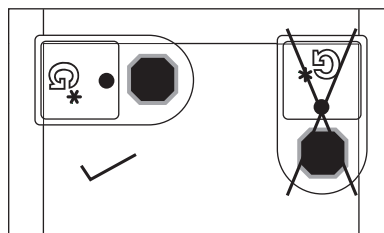

Number per door

Use one UniSoft for most applications. For heavier doors use two or more. Trial mount recommended.

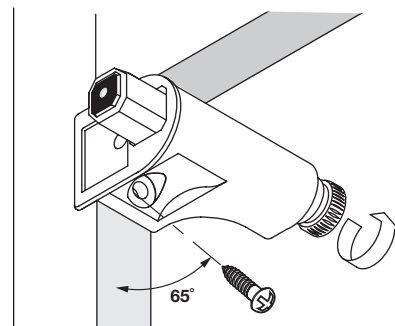

Important: Use a 65° angle for best mounting results. Pilot drill Ø2.3 mm (3/32") and 1/4" deep for a #6 x 3/4". Mount in upper corner on hinge side.