


Miniwinch




- > For wood doors; with adjustable opening angle and braking effect and soft open and soft closing mechanism
- > No time-consuming cabinet processing required
- > For horizontal or vertical installation (extremely little space required inside the cabinet)
- > Suitable for left or right hand use
- > Internal cabinet depth: min. 196 mm (7 11/16") (horizontally), min. 110 mm (4 5/16") (vertically)
- > Door height: 200–480 mm (7 7/8"–18 7/8")
- > Door weight: max. 12 kg (26 lbs.)
- > For screw mounting with euro screws
- > W x L x D: 89 x 23 x 163 mm (3 1/2" x 15/16" x 6 7/16") when installed horizontally
- > Material: Front Fixing Brackets: Zinc Alloy; Finish: nickel-plated; Cover Caps: Plastic; Fitting; Plastic; Color: gray

→ Flap Stay

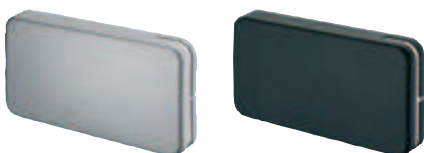

Adjustment

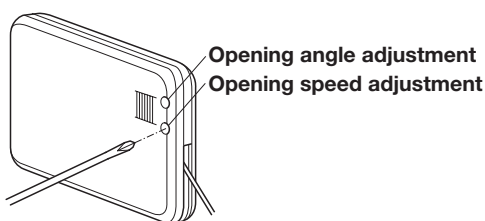


Note

Lower door weight during adjustment.

Planning and installation

Horizontal installation




U	V	W	X
200–330 (7 7/8"–13")	194 (7 5/8")	102 (4")	137 (5 3/8") + Z
330–430 (13"–17")	218 (8 9/16")	126 (5")	161 (6 5/16") + Z
430–480 (17"–18 7/8")	228 (9")	136 (5 3/8")	171 (6 11/16") + Z

Model	silver colored matt cover caps	black cover caps
A	365.47.931	365.47.331
B	365.47.932	365.47.332
C	365.47.933	365.47.333
D	365.47.934	365.47.334
E	365.47.935	365.47.335
F	365.47.936	365.47.336

Supplied With


Front fixing bracket
Cover cap
Mounting material

Vertical installation

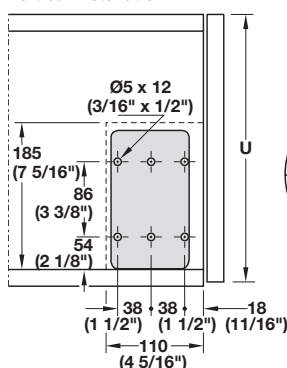

U	X
200–400 (7 7/8"–15 3/4")	161 (6 5/16") + Z

Front fixing

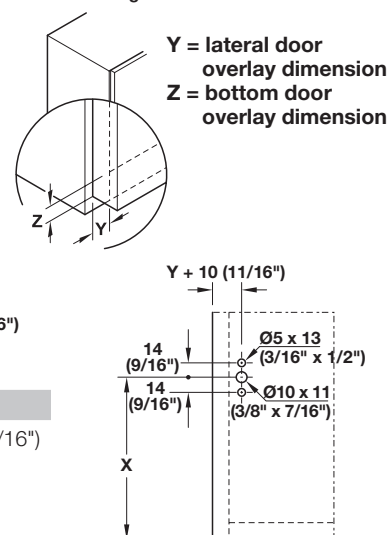

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.