


Microwinch




- > For wood doors; with adjustable opening angle and soft open and soft closing mechanism
- > No time-consuming cabinet processing required
- > For horizontal or vertical installation (extremely little space required inside the cabinet)
- > Suitable for left or right hand use
- > Internal cabinet depth: min. 180 mm (7") (horizontally), min. 82 mm (3 1/4") (vertically)
- > Door height: 210–480 mm (8 1/4"–18 7/8")
- > Door weight: max. 9 kg (19.8 lbs.)
- > For screw mounting with euro screws
- > W x L x D: 26 x 68 x 160 mm (1 1/16" x 11 1/16" x 6 5/16") when installed horizontally
- > Material: Housing: Plastic; Front Fixing Brackets: Zinc Alloy Finish: nickel-plated


→ Flap Stay

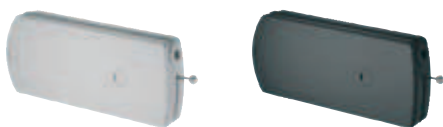

Adjustment

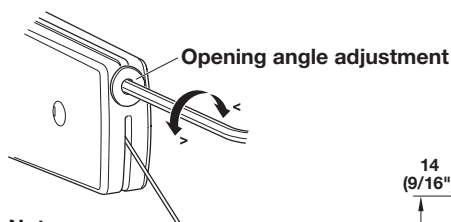

Note
Ease door weight during adjustment.




Model	gray	black
A	365.48.510	365.48.310
B	365.48.511	365.48.311
C	365.48.512	365.48.312
D	365.48.513	365.48.313

Supplied With

Front fixing bracket
Mounting material


Front fixing




U = door height
V = internal cabinet height
W = drill hole height
X = center of front fixing
Y = lateral door overlay dimension
Z = bottom door overlay dimension

Planning and installation

Horizontal installation



Vertical installation

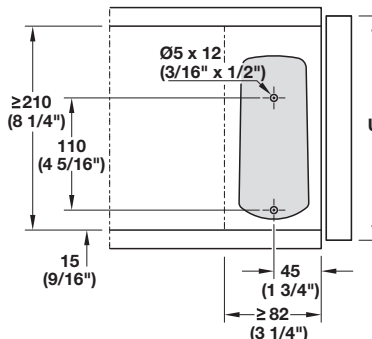

U	V	W	X
210–270 (8 1/4"–10 5/8")	≥173 (6 13/16")	135 (5 5/16")	123 (4 13/16") + Z
270–480 (10 5/8"–18 7/8")	≥186 (7 5/16")	148 (5 13/16")	144 (5 11/16") + Z

U	X
230–480 (9 1/16"–18 7/8")	123 (4 13/16") + Z

Sample measurements table for choosing the correct model.