



Planning and installation


Horizontal installation

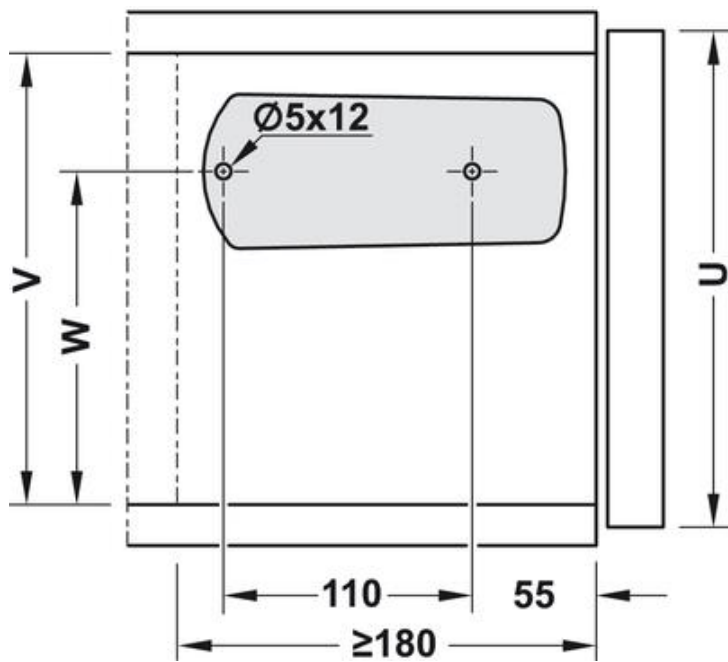

Vertical installation

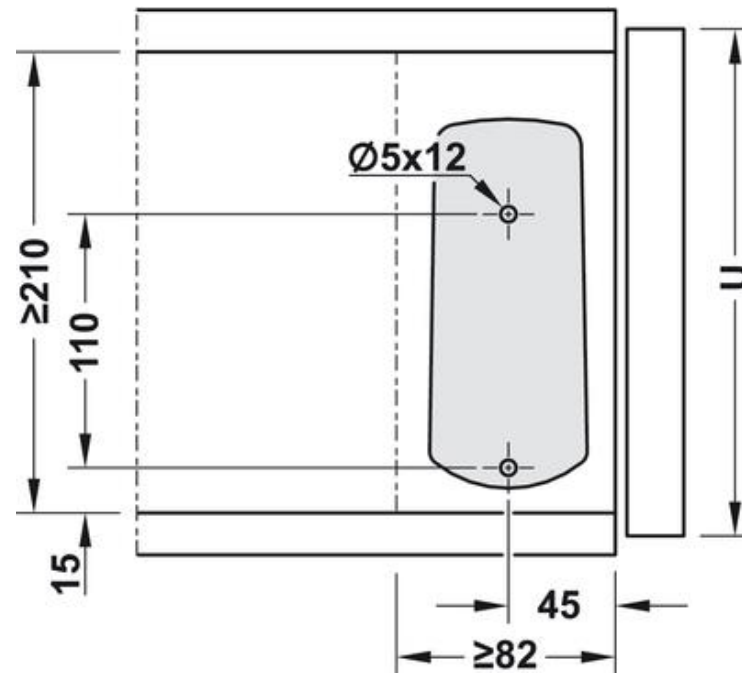

Front fixing

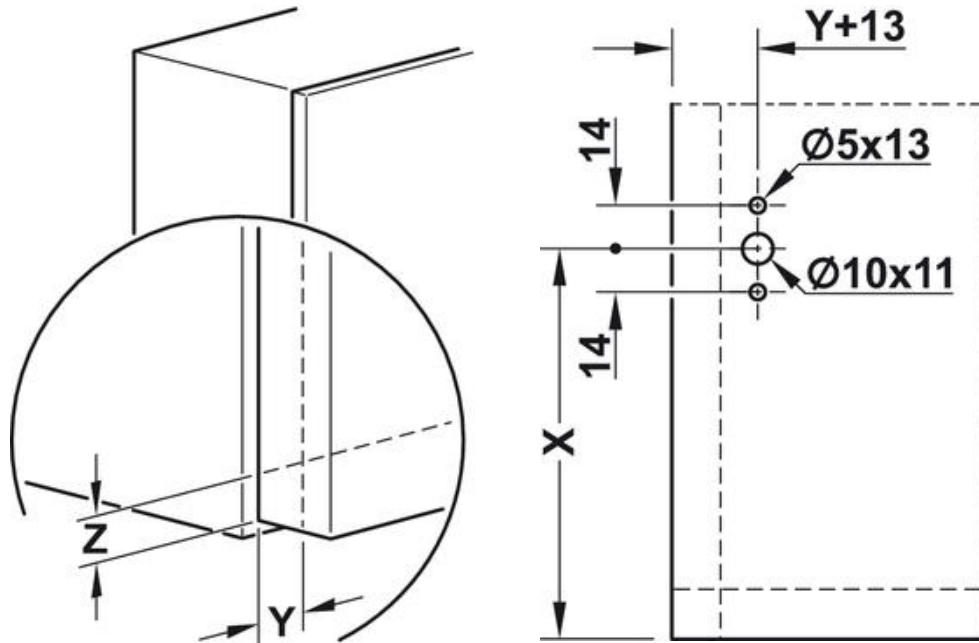

U	V	W	X
210–270	≥ 173	135	$127 + Z$
270–480	≥ 186	148	$144 + Z$

U	X
230–480	$123 + Z$

U = flap height

V = internal cabinet height


W = drill hole height

X = centre of front fixing

Y = lateral flap overlay dim.

Z = bottom flap overlay dim.

Adjustment facility

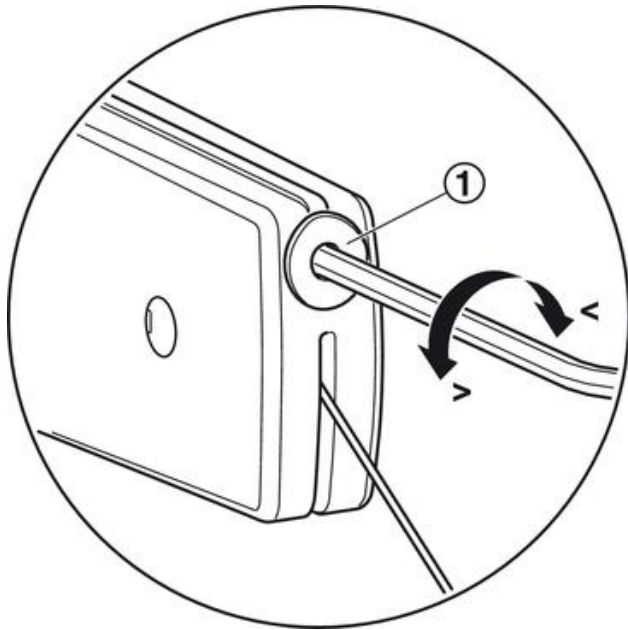


(1) Opening angle adjustment

Note


Ease flap weight during adjustment.

Sample measurements tables for choosing the correct model

Horizontal installation

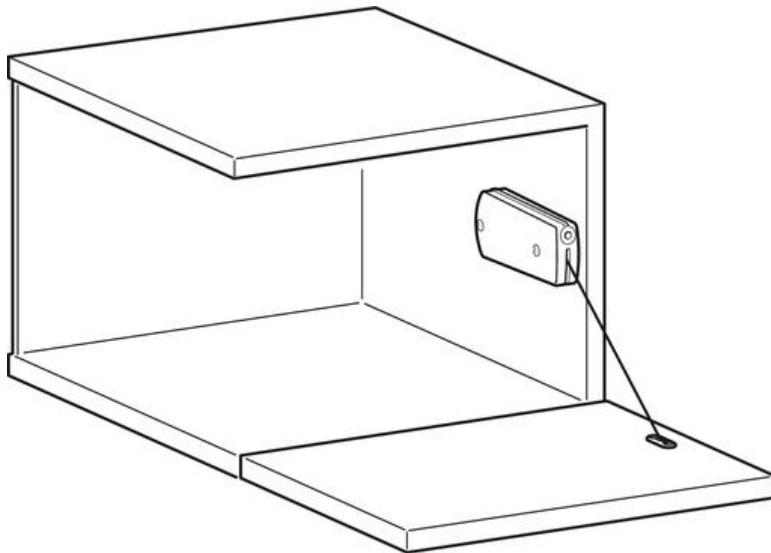

Vertical installation

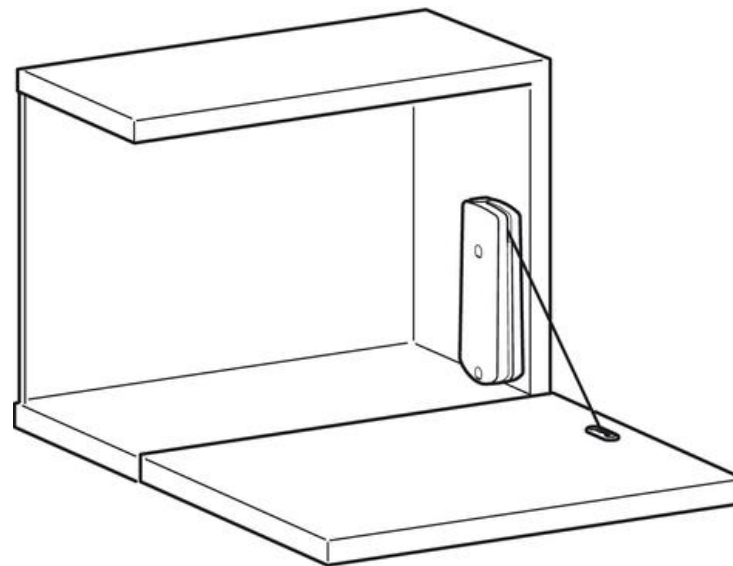

Flap height mm (inches)	Flap hinge					Concealed hinge				
	Flap weight lb	Model*				Flap weight lb	Model*			
		A	B	C	D		A	B	C	D
210–270 (8 1/4 - 10 5/8")	3.7–6.6	1				8.6–9.9	2			
	6.8–8.8		1			16.5–17.6		2		
	10.1–11.7			1		17.6–18.7			2	
	11.2–13.2				1	–				–
270–330 (10 5/8 - 13")	3.7–6.6	1				7.3–9.9	2			
	6.8–8.8		1			13.4–16.3		2		
	8.8–11.2			1		16.5–18.1			2	

Flap height mm (inches)	Flap hinge					Concealed hinge				
	Flap weight lb	Model*				Flap weight lb	Model*			
		A	B	C	D		A	B	C	D
210–270 (8 1/4 - 10 5/8")	5.5–8.4	1				9.5–12.3	2			
	8.6–10.8		1			–		2		
	12.6–14.3			1		–			–	
	–				–	–				–
270–330 (10 5/8 - 13")	5.1–6.8	1				9.3–11	2			
	7.1–9		1			15.4–16.5		2		
	9.3–12.1			1		16.8–19.8			2	

	9.7– 13.2				1	16.5– 18.7				2
330–380 (13 - 15")	3.7– 4.2	1				7.1– 7.7	2			
	6.4– 7.7		1			11.2– 15		2		
	7.9– 9.5			1		15– 16.5			2	
	8.8– 12.1				1	16.5– 17.6				2
380–430 (15 - 17")	3.3–4	1				6–7.3	2			
	5.5– 7.3		1			10.6– 14.6		2		
	7.3– 8.4			1		15– 15.9			2	
	7.9– 10.4				1	16.1– 17.6				2
	2.6– 3.7	1				5.5– 6.8	2			

	12.1– 13				1	–				–
330–380 (13 - 15")	4–5.7	1				7.5– 8.6	2			
	6.6– 8.4		1			12.3– 14.3		2		
	8.4– 10.4			1		16.5– 18.3			2	
	9.7– 12.1				1	18.3– 19.8				2
380–430 (15 - 17")	3.7– 5.1	1				6.4– 9.3	2			
	6.2– 7.7		1			10.4– 13.7		2		
	7.7– 9.5			1		15.9– 17			2	
	9.5– 10.1				1	16.1– 18.7				2
	3.3– 4.4	1				6.8– 8.8	2			

430–460 (17 - 18 1/8")	5.1– 7.3		1			10.1– 13.2		2		
	7.1– 7.7			1		13.4– 15.4			2	
	7.7– 9.9				1	15.7– 17.6				2
460–480 (18 1/8 - 18 7/8")	–	–				–	–			
	4.84– 6.16		1			9.68– 11.66		2		
	6.16– 7.04			1		12.1– 14.3			2	
	7.26– 9.46				1	14.52– 16.5				2

430–460 (17 - 18 1/8")	5.5– 7.1		1			9.7– 13.4		2		
	7.3– 8.8			1		13.7– 16.5			2	
	7.9– 9.5				1	15– 18.3				2
460–480 (18 1/8 - 18 7/8")	–	–				6.2– 8.4	2			
	5.1– 5.7		1			9–12.8		2		
	7.1– 7.9			1		13.2– 15.9			2	
	7.3– 8.8				1	13.9– 16.5				2

* The specified number refers to the number of required flap stays with pull cable.