


Häfele Free Space

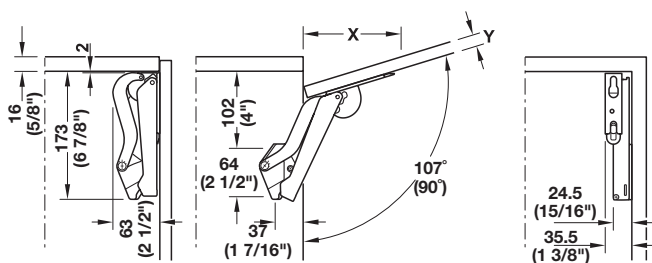

Front panel thickness Y	16 (5/8")	19 (3/4")	22 (7/8")	26 (1")
Distance X (with cabinet top panel thickness 16 mm (5/8"))	117 (4 5/8")	107 (4 1/4")	96 (3 7/8")	83 (3 1/4")

Note Dim X helps calculate space required when raised panels or crown moldings are used.

Measurements table for selecting the right model based on cabinet height and door weight including weight of handle
We recommend ordering the stronger fitting model if in doubt.

Model	Door Weight Ranges in Pounds									
	B		C		D		E		F	
Door Height	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
225 (9")	5.1	9.5	8.4	15.6	14.1	20.5	20.2	29.5	29.5	42.0
250 (10")	4.2	8.6	7.5	14.1	12.8	20.0	18.3	27.7	26.6	37.8
275 (11")	4.2	7.7	6.8	12.8	11.7	18.0	16.5	26.4	24.2	34.3
300 (12")	3.7	7.0	6.2	11.7	10.6	16.5	15.2	24.2	22.2	31.5
325 (13")	3.5	6.6	5.7	10.8	9.7	15.4	14.1	22.4	20.5	29.0
350 (14")	3.3	6.2	5.3	10.1	9.0	14.3	13.0	20.9	18.9	27.1
375 (15")	2.9	5.7	4.8	9.5	8.4	13.2	12.1	19.4	17.8	25.1
400 (16")	2.6	5.3	4.6	8.8	7.9	12.3	11.4	18.3	16.7	23.5
425 (17")	2.4	5.1	4.4	8.4	7.5	11.7	10.8	17.2	15.6	22.2
450 (18")	2.2	4.6	4.2	7.7	7.0	11.0	10.1	16.1	14.7	20.9
475 (19")	2.2	4.4	4.0	7.5	6.6	10.3	9.5	15.4	14.1	19.8
500 (20")	2.0	4.2	3.7	7.0	6.4	9.9	9.0	14.5	13.2	18.9
525 (21")	2.0	4.0	3.5	6.6	5.9	9.5	8.6	13.9	12.5	18.0
550 (22")	1.8	3.7	3.3	6.4	5.7	9.0	8.1	13.2	12.1	17.2
575 (23")	1.8	3.7	3.1	6.2	5.5	8.6	7.9	12.5	11.4	16.3
600 (24")	1.8	3.5	3.1	5.9	5.3	8.1	7.5	12.1	11.0	15.6
625 (25")	1.5	3.3	2.9	5.5	5.1	7.9	7.3	11.7	10.6	15.0
650 (26")	1.5	3.3	2.9	5.3	4.8	7.7	7.0	11.2	10.1	14.5

Order suitable screw set for aluminum frame doors, to the right.

→ Free Space 1.11

- > For standard applications with handle
- > For front height up to 650 mm (26")
- > Height/side/tilting angle and holding power
- > Screw mounts with pre-mounted Euro screw, front panel mounts without tools or slides onto pre-mounted screws
- > Max. door overlay: 90° opening: 37 mm (1 1/4")
107° opening: 22 mm (7/8")
- > Material: Housing: Plastic; Mounting Bracket and Support Lever: Steel; Finish: nickel-plated

Model	light gray	white	anthracite
B	372.27.500	372.27.700	372.27.350
C	372.27.501	372.27.701	372.27.351
D	372.27.502	372.27.702	372.27.352
E	372.27.503	372.27.703	372.27.353
F	372.27.504	372.27.704	372.27.354


Supplied With

- 2 Fittings (right/left)
- 4 Mounting screws for front panel
- 1 Set mounting instructions and drilling template

Note

The choice of fitting depends on the cabinet height and door weight to include weight of handle.

→ Screw for aluminum frame doors

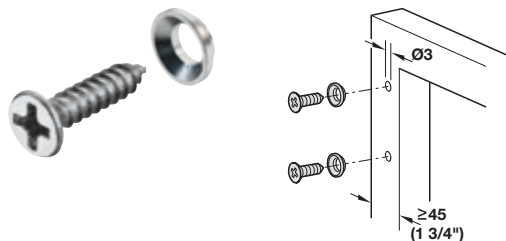

- > For connecting aluminum frame front panels with frame widths from 45 mm (1 3/4")
- > Material: Steel

Finish	Item No.
nickel-plated	372.27.600

Supplied With

- 4 screws and collar rings

→ Free Space Drilling Jig

- > For pilot drilling the cabinet side panels and door panel
- > Material: Plastic; Drilling Sleeves: Steel

Item No.
372.27.602

Note

For drilling patterns, please see Free Space installation instructions.