


Häfele Free Flap 3.15



- > For large one-piece wood or aluminum doors from frame width 45 mm (1 3/4")
- > Door height: 350–650 mm (14"–26")
- > Opening angle 90° or 107°, adjustable on fitting
- > Adjustments: Height/side/tilting angle of front +/- 1.5 mm (1/16"), holding power
- > Material: Steel; Finish: nickel-plated
Cover Cap: Plastic; Color: gray RAL 7035

Note Fitting is visible with clear and acid-etch glass, back painted glass should be considered.

→ 3.15 Set

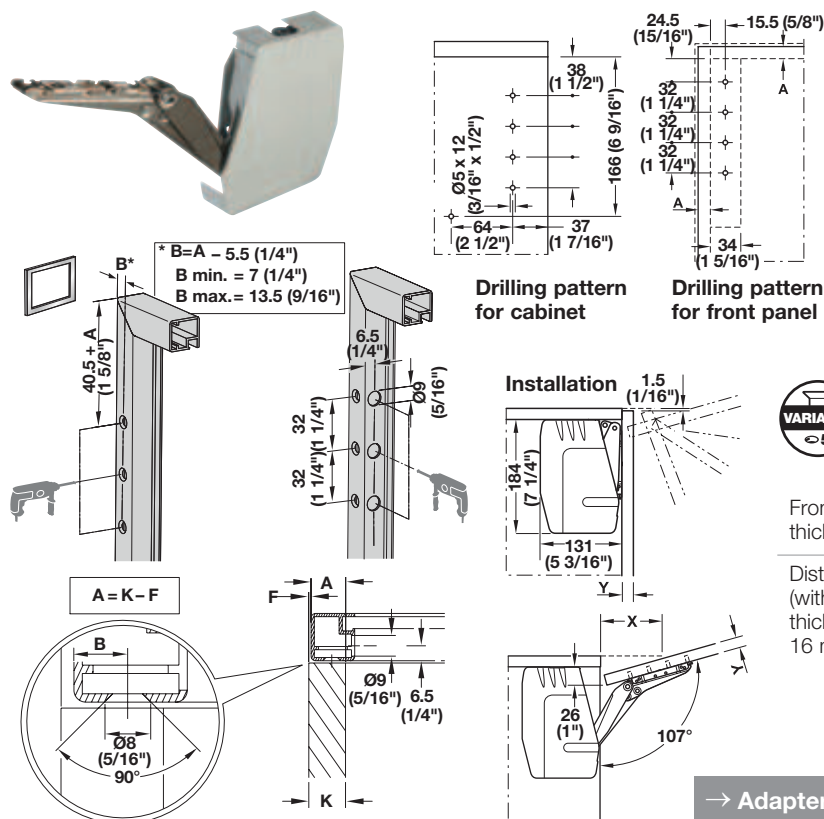

Model	Item No.
D	372.91.330
E	372.91.331
F	372.91.332
G	372.91.333

Supplied With

- 2 Fittings (right/left)
- 2 Cover caps for fitting (right/left)
- 2 Screw-on brackets
- Installation instructions
- Paper drilling template



Front panel thickness Y	16 (5/8")	19 (3/4")	22 (7/8")	26 (1")	28 (1 1/8")
Distance X (with top panel thickness 16 mm (5/8"))	83 (3 1/4")	74 (2 15/16")	64 (2 1/2")	52 (2 1/16")	46 (1 13/16")

→ Adapter



- > For aluminum doors 20 mm (13/16") or less
- > For left or right hand use
- > Material: Zinc Alloy

Finish	Item No.
nickel-plated	372.91.599

Supplied With Screws (M4x10 mm)

Sample measurements table for max. door weight in lbs.

Model/ Door Height	D		E		F		G	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
350 (14")	11.4	24.2	14.7	31.4	22.2	47.0	29.7	60.0
375 (15")	10.7	22.4	13.8	28.8	20.6	43.5	27.5	55.4
400 (16")	10.3	21.1	13.0	27.3	19.6	40.9	26.0	51.3
425 (17")	9.7	19.8	12.3	25.5	18.3	38.3	24.2	48.0
450 (18")	9.0	18.5	11.4	24.0	17.2	35.9	22.9	45.1
475 (19")	8.6	17.6	10.8	22.7	16.3	33.9	21.6	42.5
500 (20")	8.1	16.5	10.3	21.3	15.4	32.1	20.2	40.3
525 (21")	7.7	15.6	9.7	20.2	14.5	30.6	19.4	38.1
550 (22")	7.3	15.0	9.2	19.4	13.9	29.0	18.3	36.3
575 (23")	7.0	14.3	8.8	18.5	13.2	27.5	17.6	34.3
600 (24")	6.6	13.6	8.4	17.6	12.5	26.4	16.7	33.0
625 (25")	6.1	12.9	7.9	16.7	11.8	25.3	15.8	31.6
650 (26")	5.7	12.3	7.4	16.0	11.6	24.2	15.1	30.8

Varianta screws

page 12.16