


Häfele Free Up/Free Swing Accessories

→ Cross Bar

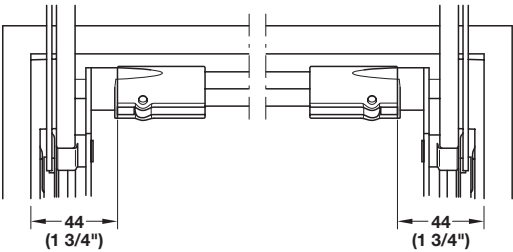


- > For synchronizing both fitting parts
- > Can be cut-to-size
- > Cutting dimension = internal cabinet width - 88 mm (3 7/16")
- > Material: Aluminum; Finish: brushed anodized

Cabinet width	Length	Item No.
600 (23 5/8")	474 (18 11/16")	372.33.692
900 (35 7/16")	774 (30 1/2")	372.33.694
1200 (47 1/4")	1074 (42 5/16")	372.33.696
1800 (70 7/8")	1674 (65 7/8")	372.33.698

Note
Cross bar is prepared for side panel thicknesses 16–19 mm (5/8"–3/4").

→ Adapter - For Aluminum Framed Doors

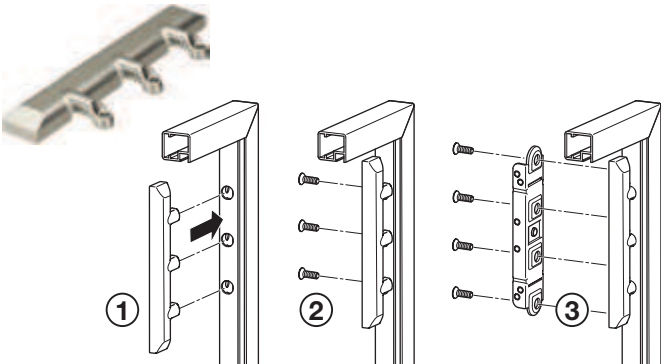

- > For doors with 20 mm (13/16") aluminum frame
- > For mounting the parallel lift-up front fitting to doors with narrow aluminum frame
- > For left or right hand use
- > Material: Zinc Alloy

Finish	Item No.
nickel-plated	372.91.599

Supplied With
M4 x 10 mm screws

Note
Fitting is visible with float and satin-frosted glass, passe-partout or obscure glass may be used.


Häfele Free Flap 3.15



- > For large one-piece wood or aluminum doors from frame width 45 mm (1 3/4")
- > Door height: 350–650 mm (14"–26")
- > Opening angle 90° or 107°, adjustable on fitting
- > Adjustments: Height/side/tilting angle of front +/- 1.5 mm (1/16"), holding power
- > Material: Steel; Finish: nickel-plated
Cover Cap: Plastic; Color: gray RAL 7035

Note Fitting is visible with clear and acid-etch glass, back painted glass should be considered.

→ 3.15 Set

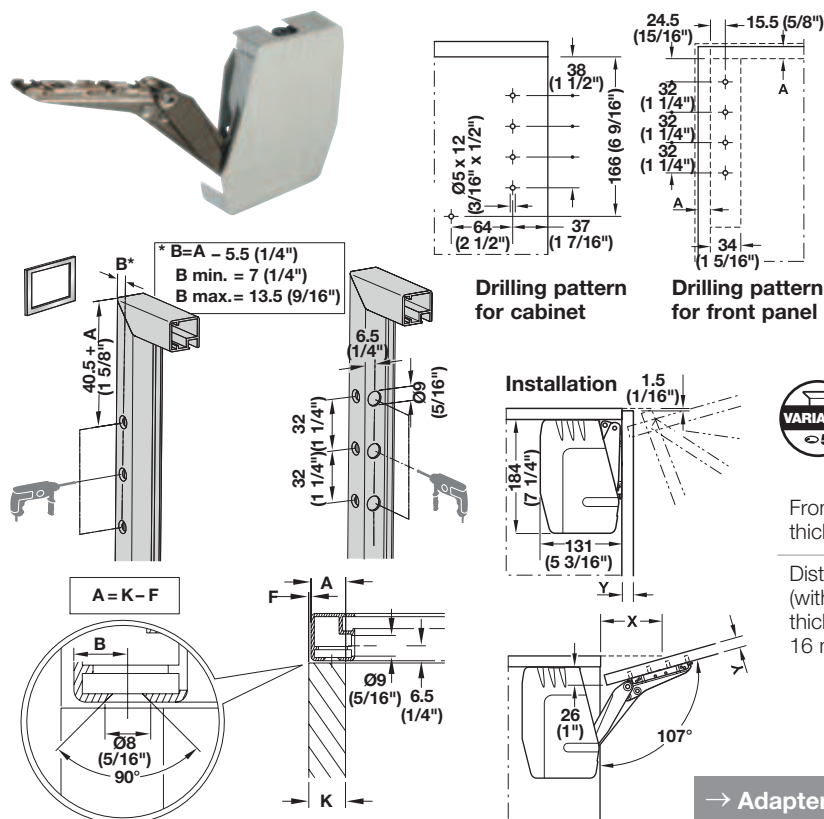

Model	Item No.
D	372.91.330
E	372.91.331
F	372.91.332
G	372.91.333

Supplied With

- 2 Fittings (right/left)
- 2 Cover caps for fitting (right/left)
- 2 Screw-on brackets
- Installation instructions
- Paper drilling template



Front panel thickness Y	16 (5/8")	19 (3/4")	22 (7/8")	26 (1")	28 (1 1/8")
Distance X (with top panel thickness 16 mm (5/8"))	83 (3 1/4")	74 (2 15/16")	64 (2 1/2")	52 (2 1/16")	46 (1 13/16")

→ Adapter



- > For aluminum doors 20 mm (13/16") or less
- > For left or right hand use
- > Material: Zinc Alloy

Finish	Item No.
nickel-plated	372.91.599

Supplied With Screws (M4x10 mm)

Sample measurements table for max. door weight in lbs.

Model/ Door Height	D		E		F		G	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
350 (14")	11.4	24.2	14.7	31.4	22.2	47.0	29.7	60.0
375 (15")	10.7	22.4	13.8	28.8	20.6	43.5	27.5	55.4
400 (16")	10.3	21.1	13.0	27.3	19.6	40.9	26.0	51.3
425 (17")	9.7	19.8	12.3	25.5	18.3	38.3	24.2	48.0
450 (18")	9.0	18.5	11.4	24.0	17.2	35.9	22.9	45.1
475 (19")	8.6	17.6	10.8	22.7	16.3	33.9	21.6	42.5
500 (20")	8.1	16.5	10.3	21.3	15.4	32.1	20.2	40.3
525 (21")	7.7	15.6	9.7	20.2	14.5	30.6	19.4	38.1
550 (22")	7.3	15.0	9.2	19.4	13.9	29.0	18.3	36.3
575 (23")	7.0	14.3	8.8	18.5	13.2	27.5	17.6	34.3
600 (24")	6.6	13.6	8.4	17.6	12.5	26.4	16.7	33.0
625 (25")	6.1	12.9	7.9	16.7	11.8	25.3	15.8	31.6
650 (26")	5.7	12.3	7.4	16.0	11.6	24.2	15.1	30.8

Varianta screws

page 12.16