

Häfele Duo Standard

→ Complete Set



- > For wood or aluminum framed doors
- > Frame width: from 45 mm (1 3/4")
- > Edge distance: 37 mm (1 7/16")
- > Door width: max. 600 mm (25 5/8")
- > Material: Zinc Alloy

Installation	nickel-plated	white	black
Wood screws	373.66.612	373.66.262	373.66.212
Euro screws	373.66.614	373.66.264	373.66.214

For doors with aluminum frame

- > From frame width: 20 mm (13/16")
- > Edge distance: 37 mm (1 7/16")
- > Finish: nickel-plated

Installation	Item No.
Sheet metal screws	373.66.622

Supplied With

Lid stay
Mounting bracket for cabinet
Screw mount bracket for flap

Important Note

Mounting location dimensions below are critical for this fitting to perform properly.

Sample measurements table for max. door weight. Always use two fittings when used as flap stay. Include weight of handles.

Door height	Max. Door Weight in Pounds			
	Stopping function 1 Stay	2 Stays	Braking function 1 Stay	2 Stays

For opening angle 75°

254 (10")	15.4 lbs.	33 lbs.	19.8 lbs.	33 lbs.
305 (12")	13.2 lbs.	26.4 lbs.	16.5 lbs.	33 lbs.
356 (14")	11 lbs.	22 lbs.	14.3 lbs.	28.6 lbs.
406 (16")	9.9 lbs.	19.8 lbs.	13.2 lbs.	25.3 lbs.
457 (18")	8.8 lbs.	17.6 lbs.	11 lbs.	22 lbs.
508 (20")	7.7 lbs.	15.4 lbs.	9.9 lbs.	19.8 lbs.

For opening angle 90° - See 90° Flap Stay for 8"-16"

457 (18")	7.7 lbs.	14.3 lbs.	9.9 lbs.	18.7 lbs.
508 (20")	6.6 lbs.	13.2 lbs.	8.8 lbs.	16.5 lbs.


For opening angle 110°

203 (8")	13.2 lbs.	26.4 lbs.	17.6 lbs.	33 lbs.
254 (10")	11 lbs.	20.9 lbs.	13.2 lbs.	26.4 lbs.
305 (12")	8.8 lbs.	17.6 lbs.	11 lbs.	22 lbs.
356 (14")	7.7 lbs.	15.4 lbs.	8.8 lbs.	19.8 lbs.
406 (16")	6.6 lbs.	13.2 lbs.	8.8 lbs.	16.5 lbs.
457 (18")	5.5 lbs.	12.1 lbs.	7.7 lbs.	15.4 lbs.
508 (20")	4.4 lbs.	11 lbs.	6.6 lbs.	13.2 lbs.


For opening angle 90° as a Flap Stay

305 (12")	11 lbs.	22 lbs.	13.2 lbs.	28.6 lbs.
356 (14")	8.8 lbs.	18.7 lbs.	12.1 lbs.	24.2 lbs.
406 (16")	7.7 lbs.	15.4 lbs.	11 lbs.	22 lbs.



Lid stay

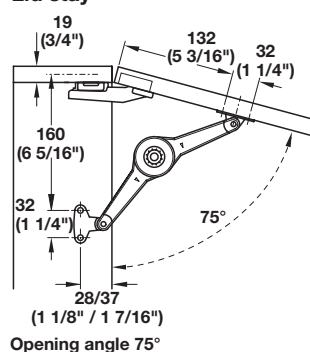


Flap stay

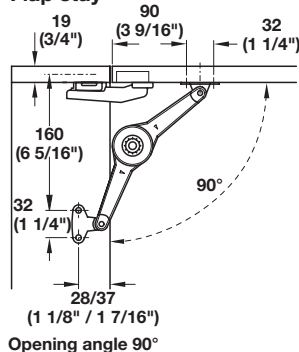


Lateral space requirement/side distance(s) for screw bracket

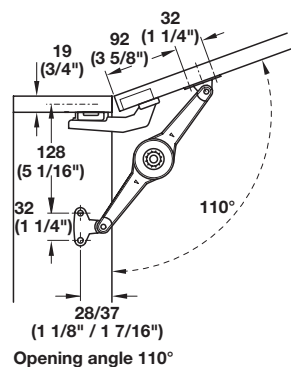

Installation as flap stay

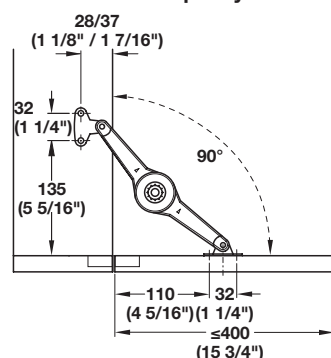

Separate catch required.
Space requirement for fitting inside the cabinet when the door is being closed: 130 mm (5 1/8") from front edge of cabinet

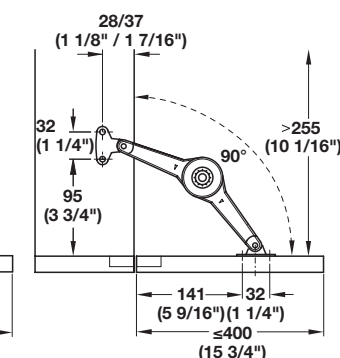

No separate catch required.

Minimum inside cabinet height 255 mm (10 1/16")