



Slido






gilt für Artikel: siehe Tabelle
applies to Cat. No.: see table
valable pour référence : voir table
adecuado para N° de ref.: ver table

		0 	1 	2 
F-Line21 12D	 12 kg	 402.33.032 402.33.034	402.33.038 402.33.039	402.33.037 402.33.039
F-Line21 20D	 20 kg	 402.33.032 402.33.034	402.33.035	402.33.033 402.33.036

i



	0 	1 	2 
b	≥ 250	≥ 350	≥ 530

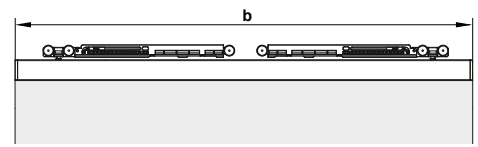



► 1/16



► 3/16



► 6/16



► 7/16





► 8/16





► 12/16 & 16/16



Beispiel 1
Example 1
Ejemplo 1

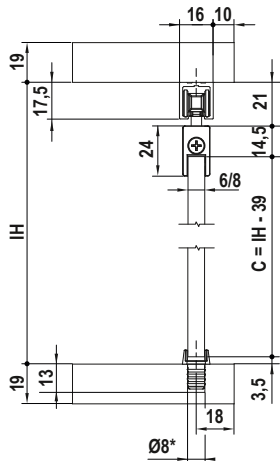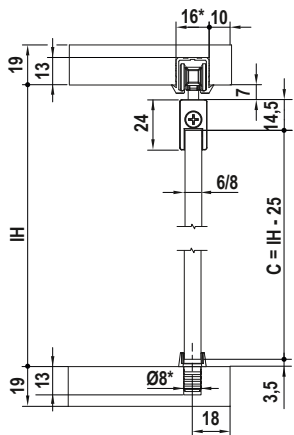

Beispiel 2
Example 2
Ejemplo 2

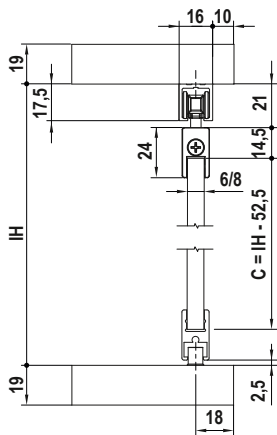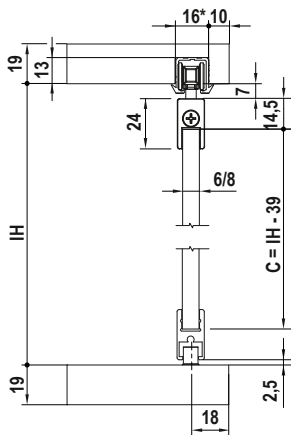

The image contains two sets of technical drawings for cable assemblies, labeled IH and IH-25. Each set includes a side view (top) and a front view (bottom).

Side View Dimensions (Common to IH and IH-25):

- Overall height: 19
- Height from base to top of cable: 13
- Width of top section: 32*
- Width of middle section: 10
- Width of bottom section: 7
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5
- Overall height: 19
- Height from base to top of cable: 13
- Width of top section: 32*
- Width of middle section: 10
- Width of bottom section: 7
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5

Front View Dimensions (Common to IH and IH-25):

- Overall width: 35
- Width of top section: 18
- Width of middle section: 6/8
- Width of bottom section: 18
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5
- Overall width: 35
- Width of top section: 18
- Width of middle section: 6/8
- Width of bottom section: 18
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5

Specific Dimensions for IH:



- Overall height: 19
- Height from base to top of cable: 13
- Width of top section: 32*
- Width of middle section: 10
- Width of bottom section: 7
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5
- Overall height: 19
- Height from base to top of cable: 13
- Width of top section: 32*
- Width of middle section: 10
- Width of bottom section: 7
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5





Specific Dimensions for IH-25:

- Overall height: 19
- Height from base to top of cable: 13
- Width of top section: 32*
- Width of middle section: 10
- Width of bottom section: 7
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5
- Overall height: 19
- Height from base to top of cable: 13
- Width of top section: 32*
- Width of middle section: 10
- Width of bottom section: 7
- Distance from base to top of cable: 14.5
- Distance from base to top of cable: 3.5





[illegible]

***Atención: ¡En MDF y madera dura se deberán someter antes a prueba el ancho de ranura y el diámetro de perforación !**

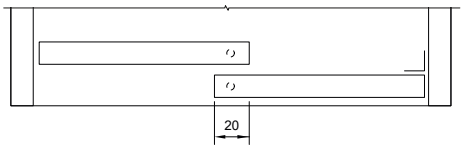
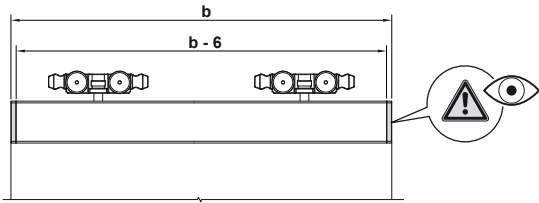


 F-Line21 12D F-Line21 20D				
A  402.30.134	0	2x	4x	
	1	1x	2x	
	2	-	-	
B  402.30.136 ¹ 402.30.135 ²	0	-	-	
	1	1x	2x	
	2	2x	4x	
C  402.30.321	0	-	-	
	1	1x	2x	
	2	2x	4x	
D  402.30.303	0	2x	4x	
	1	1x	2x	
	2	-	-	
E  402.30.204	0	1x	2x	
	1	1x	2x	
	2	1x	2x	
F  402.33.404	0	1x	1x	
	1	1x	1x	
	2	1x	1x	
G  402.30.304	0	-	1x	
	1	-	1x	
	2	-	1x	

¹ 12 kg; ² 20 kg



³ 2,5 m; ⁴ 3,5 m

Achtung: Bereits leichte Beschädigungen an den Rollen können die Laufeigenschaften beeinträchtigen.

Caution: even minor damage to the casters can affect the running properties.

Attention: de légers dommages des roulettes suffisent déjà à affecter les capacités de roulement.

Precaución: Si los rodillos están tan sólo un poco dañados, se pueden ver mermadas las propiedades de rodadura.







+

PZ 1




+

PZ 2



SW 2,5
















003.55.171*


- * Empfohlen: Fugendichtstoff Pattex, Silikon sauervernetzend, transparent
- * Recommended: Joint sealant Pattex, silicone acetous cross-linking, transparent
- * Recommandé : Pattex, réticulé à l'acide silicone, transparent
- * Recomendado: sellador de juntas Pattex, reticulado con ácido de silicona, transparente

1


0

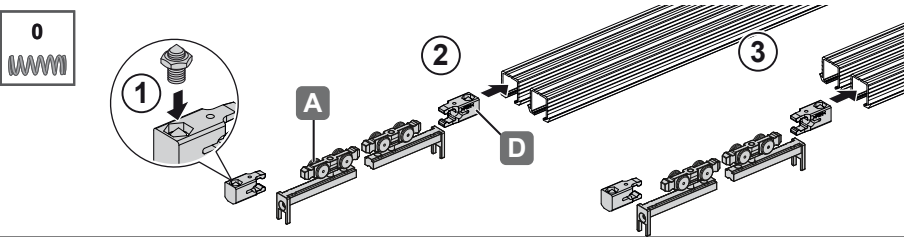








1

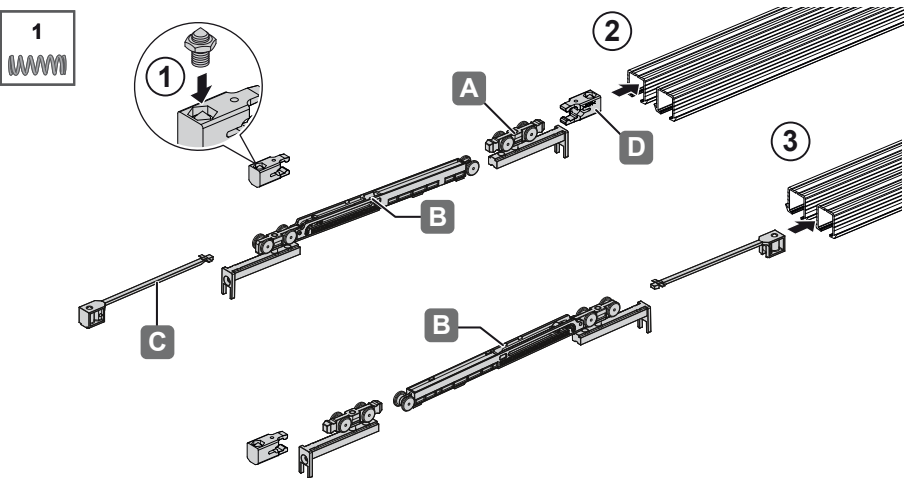

2

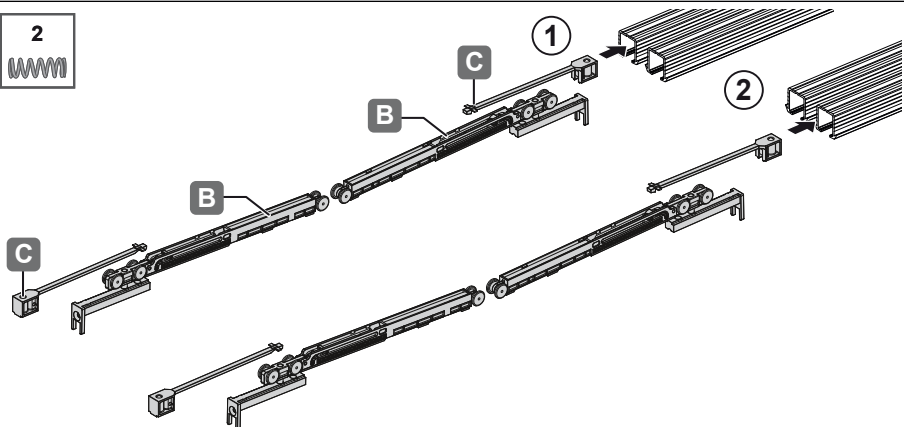









2

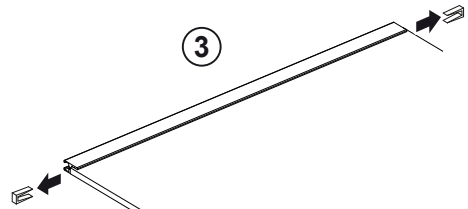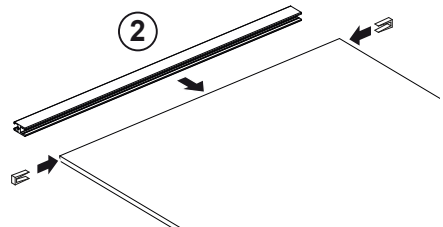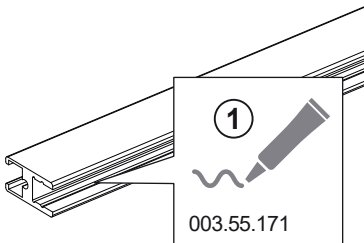



2



Beispiel 2
Example 2
Ejemplo 2

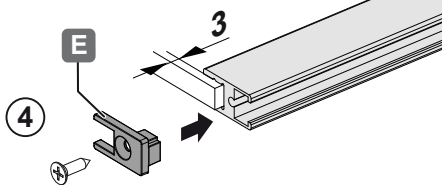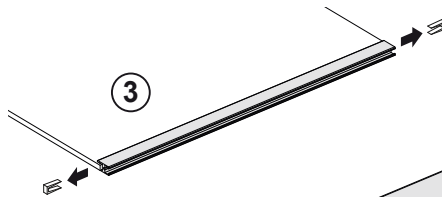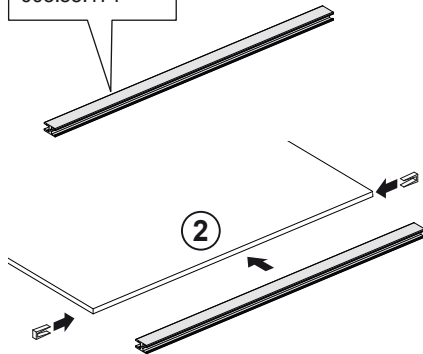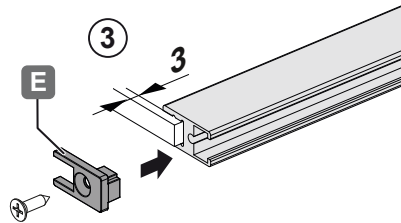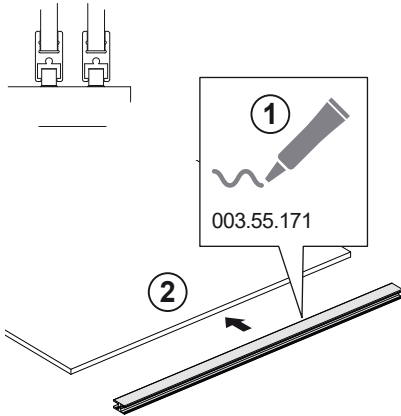


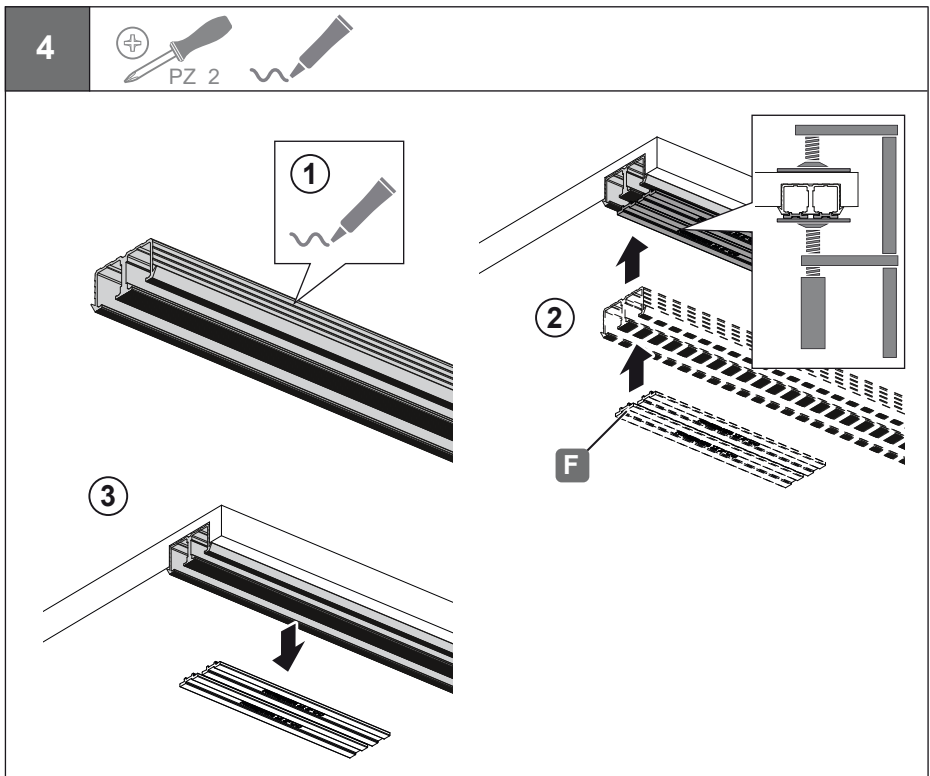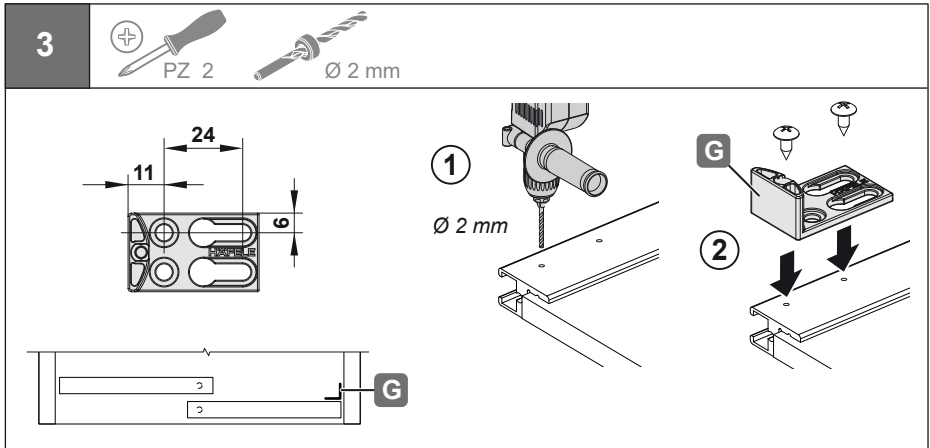






3









Beispiel 1
Example 1
Ejemplo 1

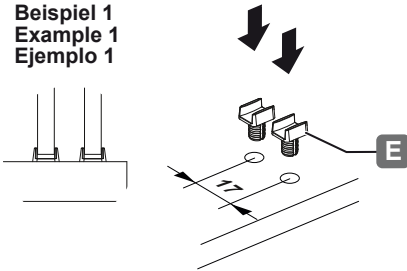







Beispiel 2
Example 2
Ejemplo 2

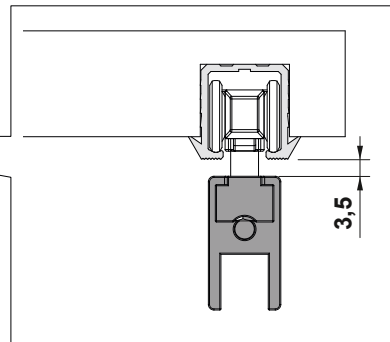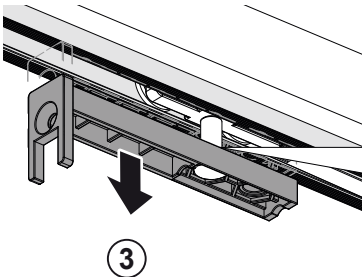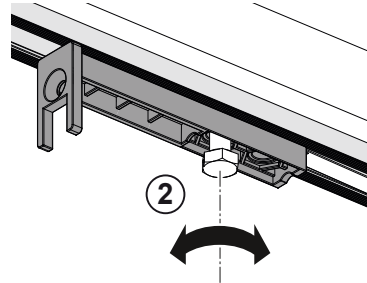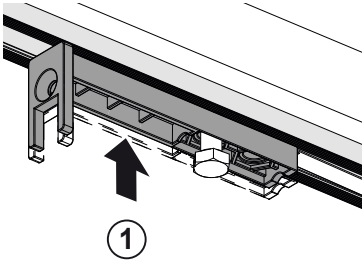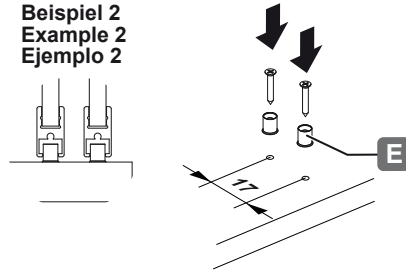

5

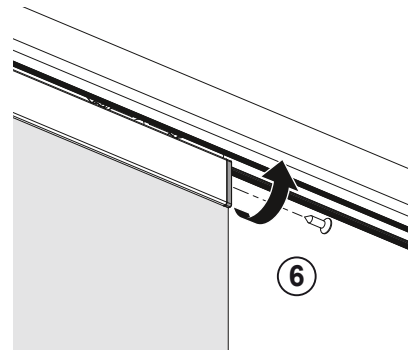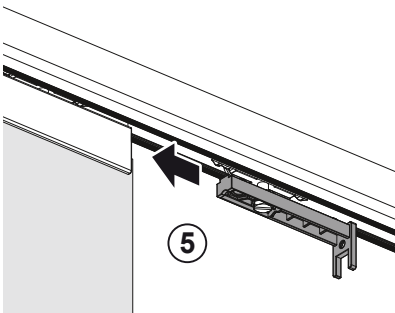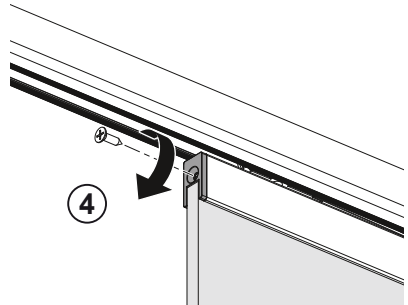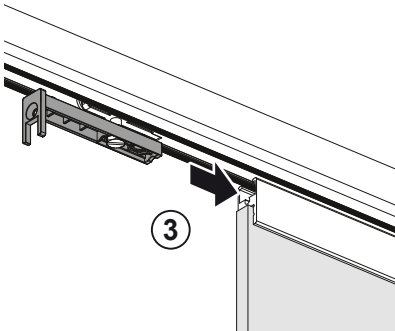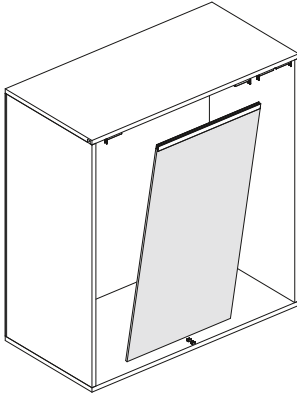



5

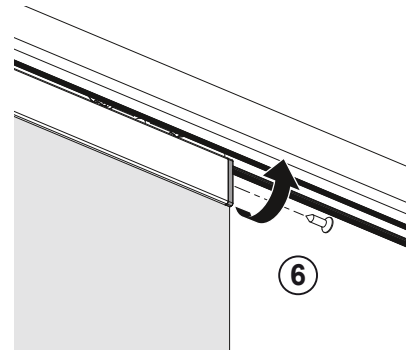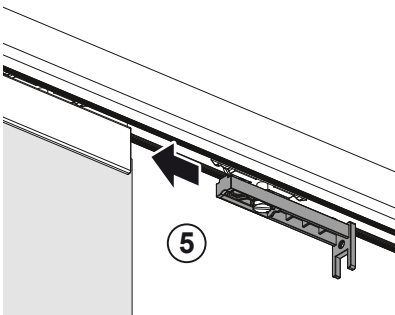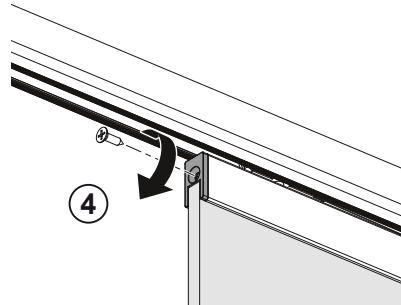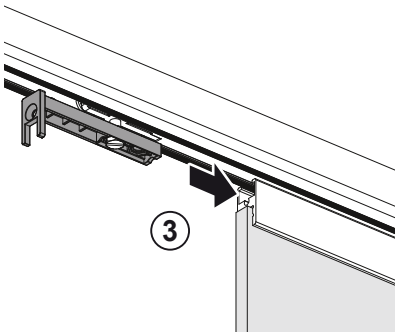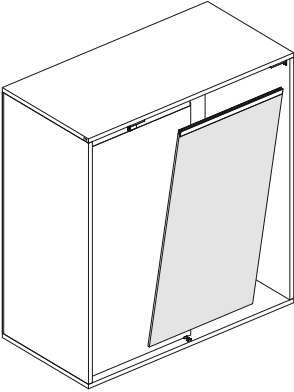



6





0

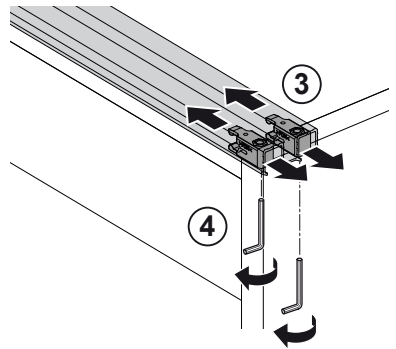

1

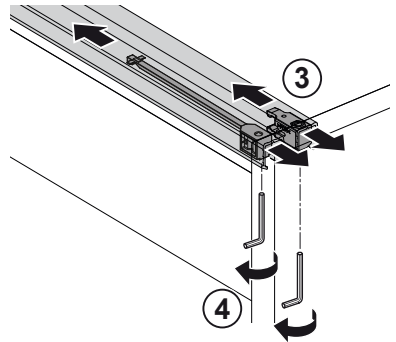

2

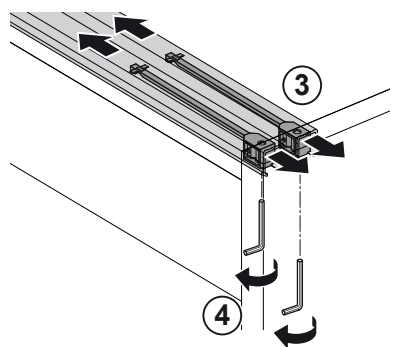



SW 2,5

