
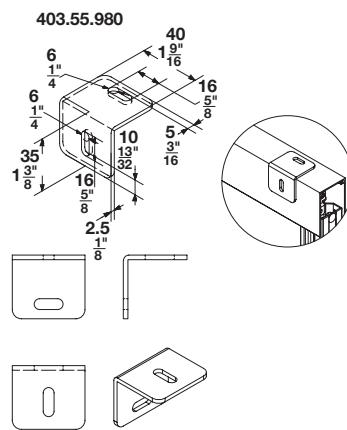
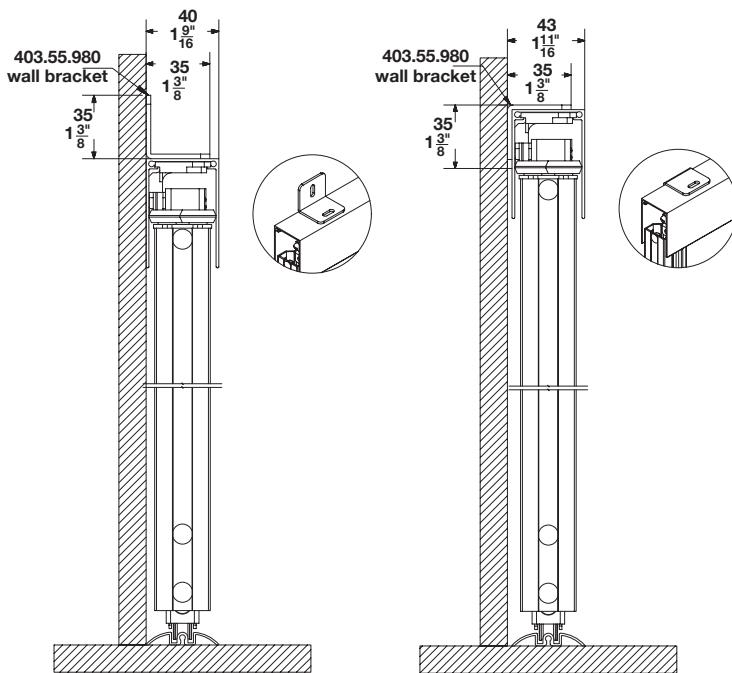
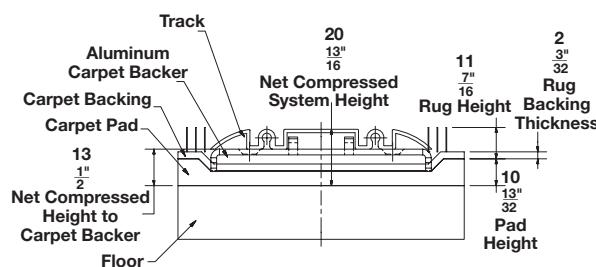


Häfele Slido R-Aluflex 80A

→ Installation of running tracks on carpet

Sliding Door Hardware

Single track with carpet assembly Double track with carpet assembly Triple track with carpet assembly

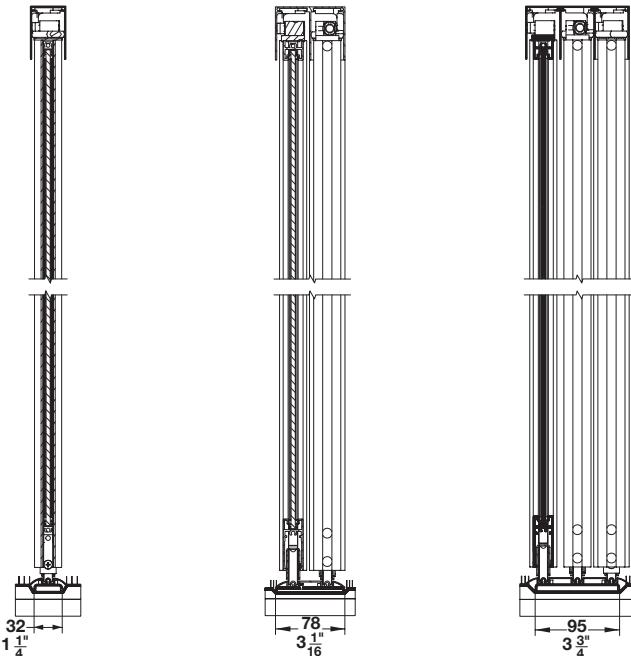

Häfele Slido R-Aluflex 80A

→ Door Components

Description	Image	Material	Finish	Length	Item No.
Gasket, for infill panel thickness 5–6.4 mm (3/16"–1/4")		Plastic	transparent	2.5 m (8' 2 7/16")	403.56.925
Gasket, for infill panel thickness 7.7–8.3 mm (19/64"–21/64")				3.5 m (11' 5 13/16")	403.56.935
Sliding brush set, for cleaning of running tracks, with Häfele logo, (2 pcs.)				6 m (19' 8 1/4")	403.56.960
Sliding brush set, for cleaning of running tracks, without Häfele logo, (2 pcs.)		Aluminum	silver colored	2.5 m (8' 2 7/16")	403.79.925
Brush seal, self-adhesive, mounted onto front edge of the door to create a seal between the door and jamb				3.5 m (11' 5 13/16")	403.79.935
Brush seal, self-adhesive, for protecting the inside from dust, mounted between 2 overlapping vertical frame profiles				6 m (19' 8 1/4")	403.79.960
End bracket for all top guide tracks, for covering ends, screw mounted		Synthetic	gray	10 m (32' 9 11/16")	403.54.531

→ Accessories

Description	Image	Material	Finish	Length	Item No.
Brush seal, self-adhesive, for protecting the inside from dust, mounted between 2 overlapping vertical frame profiles		Synthetic	gray	10 m (32' 9 11/16")	403.54.530
End bracket for all top guide tracks, for covering ends, screw mounted				175 m (574' 1 3/4")	403.54.513
Cover cap, for single bottom running track		Stainless steel	silver colored	—	403.55.991
Wall mounting bracket, for top guide track, includes mounting screw and set nut, mounted every 400 mm (15 3/4")			bronze	—	403.55.100
Center door stop for mounting into the top guide track			black	—	403.55.301
Roller pin for joining top guide tracks and bottom running tracks			white	—	403.55.300
Follower set for door, includes mounting screws, suitable for frame profile 10 and 50		Aluminum	silver colored	—	403.55.060
			bronze	—	403.55.160
			black	—	403.55.401
			white	—	403.55.400
		Steel	silver colored	—	403.55.980
			bronze	—	403.55.101
			black	—	403.55.180
			white	—	403.55.780
	Plastic	gray	—	—	403.50.945
	Steel	—	—	—	403.50.965
	Aluminum	silver colored	—	—	403.50.979
		bronze	—	—	403.50.119
		black	—	—	403.50.401
		white	—	—	403.50.402

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Häfele Slido R-Aluflex 80 W

	Supplied with	Item No.
For 1 door	Running gear with plastic guide rollers	403.50.941

Note

Please order top guide and bottom running tracks, soft closing mechanism and other accessories separately.

→ Top Guide and Bottom Running Tracks

Description	Material	Length	silver	bronze	white	black
Single top guide track	Aluminum	2 m (6' 6 3/4")	403.36.902	403.36.102	–	–
		3 m (9' 10 1/8")	403.36.903	403.36.103	–	–
		6 m (19' 8 1/4")	403.36.906	403.36.106	403.36.810	403.36.813
Double top guide track	Aluminum	2 m (6' 6 3/4")	403.36.912	403.36.112	–	–
		3 m (9' 10 1/8")	403.36.913	403.36.113	–	–
		6 m (19' 8 1/4")	403.36.916	403.36.116	403.36.811	403.36.814
Triple top guide track	Aluminum	6 m (19' 8 1/4")	403.36.926	403.36.126	403.36.812	403.36.815
Single bottom running track	Aluminum	2 m (6' 6 3/4")	403.36.932	403.36.132	–	–
		3 m (9' 10 1/8")	403.36.933	403.36.133	–	–
		6 m (19' 8 1/4")	403.36.936	403.36.136	403.36.600	403.36.603
Double bottom running track	Aluminum	2 m (6' 6 3/4")	403.36.942	403.36.142	–	–
		3 m (9' 10 1/8")	403.36.943	403.36.143	–	–
		6 m (19' 8 1/4")	403.36.946	403.36.146	403.36.601	403.36.604
Triple bottom running track	Aluminum	6 m (19' 8 1/4")	403.36.956	403.36.156	403.36.602	403.36.605

→ Accessories

Description	Material	Finish	Item No.
End bracket for all guide tracks, for covering the sides, screw mounted	Steel	gray	403.55.991
		white	403.55.300
		bronze	403.55.100
		black	403.55.301
Center door stopper for mounting into the top guide track	Plastic	gray	403.50.945
Cover cap, for single running bottom track	Stainless steel	gray	403.55.060
		white	403.55.400
		bronze	403.55.160
		black	403.55.401
Wall mounting bracket, for top guide track, required every 400 mm (15 3/4")	Steel	gray	403.55.980
		white	403.55.780
		bronze	403.55.101
		black	403.55.180
Soft and self-closing mechanism, for door weights up to 15 kg (33 lbs.)		black/gray	403.50.988
Soft and self-closing mechanism, for door weights up to 40 kg (88 lbs.)	Plastic	black/green	403.50.999
Soft and self-closing mechanism, for door weights up to 80 kg (176 lbs.)		black/yellow	403.50.989

Note

Minimum door width with one soft and self-closing mechanism is 500 mm (19 5/8") and 830 mm (36 5/8") with 2.