



**Straightaway 115**

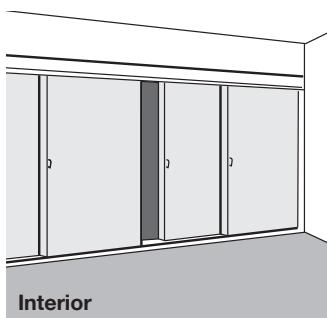


Interior

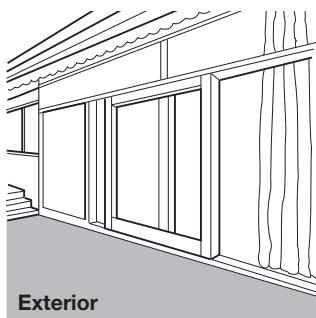


Exterior

- > For single and multiple interior and exterior sliding doors
- > Door weight: max. 115 kg (250 lbs.)
- > Door height: max. 2400 mm (7' 10 1/2")
- > Door thickness: 30–60 mm (1 3/16"–2 3/8")
- > Rattle-free upper guide
- > Simple installation
- > Recommended width of door should be a minimum 1/3 of door height
- > Mortise for lower running gear must fit tight around the running gear's casing
- > Weight of sliding door must be carried on top of casing above the wheel

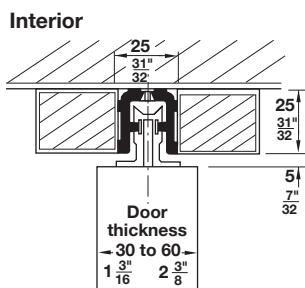


Door thickness  
30 to 60  
1 3/16 2 3/8

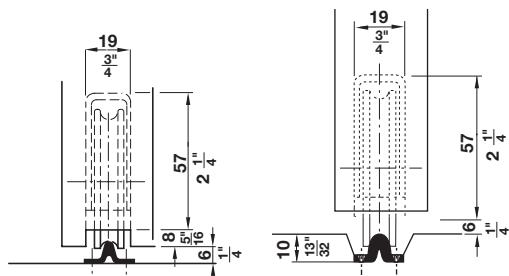


Door height  
19 3/4

Track height  
57 2 1/4

**Exterior**

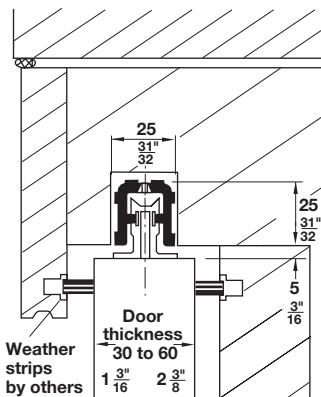

Door thickness  
30 to 60  
1 3/16 2 3/8

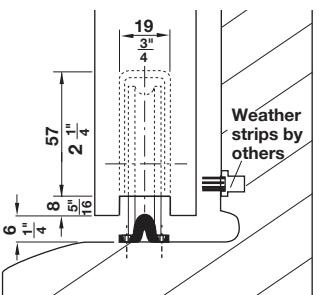

Door height  
19 3/4

Track height  
57 2 1/4



→ Individual Components

Description	Image	Material	Finish	Length	Item No.
Lower track, pre-drilled, 10 x 21 mm (3/8" x 7/8"), interior application only		Steel	galvanized	3 m (9' 10 1/8")	404.39.921
Lower track, pre-drilled 10 x 21 mm (3/8" x 7/8")		Stainless Steel	–	3 m (9' 10 1/8")	941.80.631
				2.1 m (6' 10 11/16")	941.80.622
Upper guide channel 25 x 25 mm (1" x 1")		Aluminum	–	3 m (9' 10 1/8")	942.51.730
				2.1 m (6' 10 11/16")	942.51.721
Lower running gear, wheel with needle bearing, for 115 kg (250 lbs.) doors		Casing: Die-cast Wheel: Nylon	–	–	404.36.020
Lower running gear, wheel with needle bearing, for 55 kg (120 lbs.) doors, interior application only		Casing: Die-cast Wheel: Nylon	–	–	404.36.011
Upper guide, rattle-free with brush strip		Aluminum	–	–	404.36.904
Buffer		Rubber	black	–	941.80.050

**Order specifications**

Number of running gears and upper guides; Lower track and upper guide channel lengths; Door weight, height and width; Type of stopper