



HAWA Clipo 16 H IF




- > Door weight: max. 16 kg (35 lbs.)
- > Door height: max. 1,400 mm (55 1/8")
- > Door width: max. 1,000 mm (39 3/8")
- > Door thickness: 16–19 mm (5/8"-3/4")
- > Height adjustment: +2/-1 mm (+1/16"-/-1/32")
- > Running gears with clip-mounting, plastic rollers with metal axles
- > Quick door mounting
- > No guide rails in the cabinet bottom
- > A wood cover panel is not needed
- > Optional soft closing mechanism

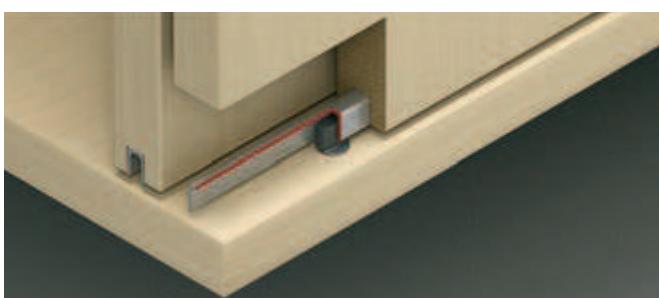


Soft close mounting





Door with one soft closing mechanism

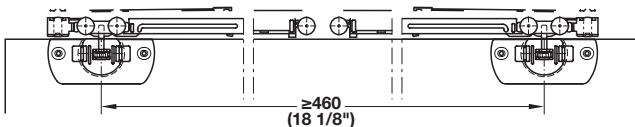


Door with two soft closing mechanisms

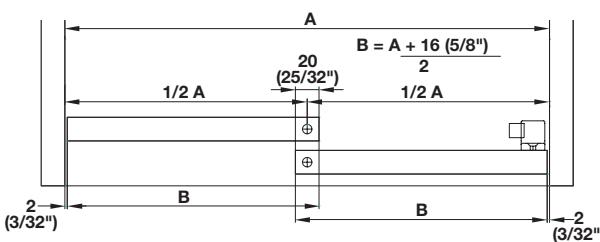


Drilling pattern

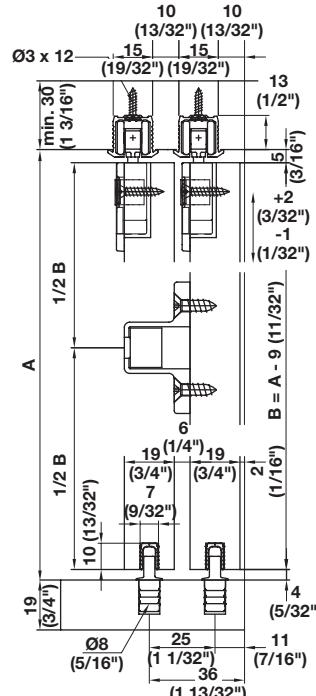


**Mounting example
with 19 mm (3/4")
door and track 405.87.082.**




Upper track,
screw mounted




Upper track,
for gluing into groove

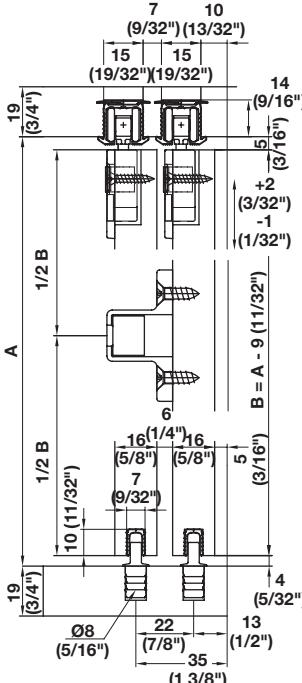

**Mounting example
with 16 mm (5/8")
door and track 405.87.092**



Double upper track
screw mounted



Upper track,
with rotating fasteners

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

→ HAWA Clipo 16 H IF Set

	Version	Supplied with	Item No.
For 2 doors	With clip-in door stopper	4 running gears with housings 1 door follower 2 door stoppers with clip-in door stopper 2 floor guides	405.82.216

Supplied With

1 set

Note

Please order running and guide tracks separately. Soft closing mechanism on one side is possible from pitch length of min. 260 mm (10 1/4"), both sides from 460 mm (18 1/8"). Please order soft closing mechanism set for soft closing on both sides separately.

→ Tracks and Accessories

Description		Min. cabinet top thickness	Material	Finish	Length/Door weight	Item No.
Upper track, for gluing into groove (polyurethane glue recommended)		19 (3/4")	Aluminum	bright	2.5 m (8' 2 7/16")	405.87.042
					3.5 m (11' 5 13/16")	405.87.043
Upper track, with rotating fasteners (not suitable for hard wood)		19 (3/4")	Aluminum	bright	2.5 m (8' 2 7/16")	405.87.092
					3.5 m (11' 5 13/16")	405.87.093
Upper track, pre-drilled, for screw mounting		30 (1 3/16")	Aluminum	bright	2.5 m (8' 2 7/16")	405.87.082
					3.5 m (11' 5 13/16")	405.87.083
Double upper track, pre-drilled, for screw mounting		19 (3/4")	Aluminum	bright	2.5 m (8' 2 7/16")	405.90.032
					3.5 m (11' 5 13/16")	405.90.033
Lower guide channel, with harpoon ribs		–	Plastic	anthracite	2.5 m (8' 2 7/16")	405.98.517
Soft closing mechanism, optional for screw mounting to housing One set includes two mechanisms. Two sets are required for dual soft closing of two doors.		–	Plastic	gray	<8 kg (17.6 lbs.)	405.10.077
					8 kg–16 kg (17.6–35 lbs.)	405.10.075
Service port, for upper track with rotating fasteners (access running gear after installation)		–	Plastic	gray	–	405.83.180
Service port, for upper track for screw mounting (access running gear after installation)		–	Plastic	gray	–	405.83.181

HAWA Clipo 16 H MF




- > Door weight: max. 16 kg (35 lbs.)
- > Door height: max. 1,400 mm (55 1/8")
- > Door width: max. 1,000 mm (39 3/8")
- > Door thickness: 16-19 mm (5/8"-3/4")
- > Height adjustment: +2/-1 mm (+3/32"/-1/32")
- > Running gears with clip-mounting, plastic rollers with metal axles
- > Quick door mounting
- > No guide rails in the cabinet bottom
- > A wood cover panel is not needed
- > Optional soft closing mechanism




7


Soft close mounting





Door with one soft closing mechanism.



Door with two soft closing mechanisms.

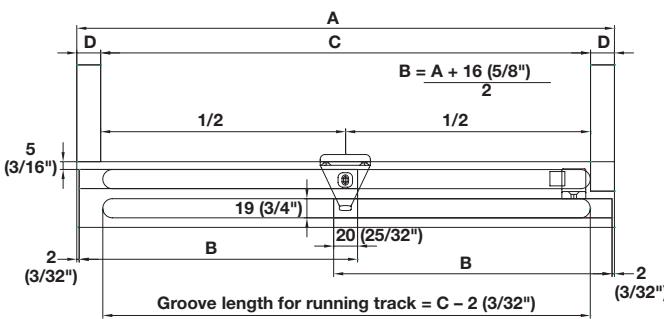


Drilling pattern

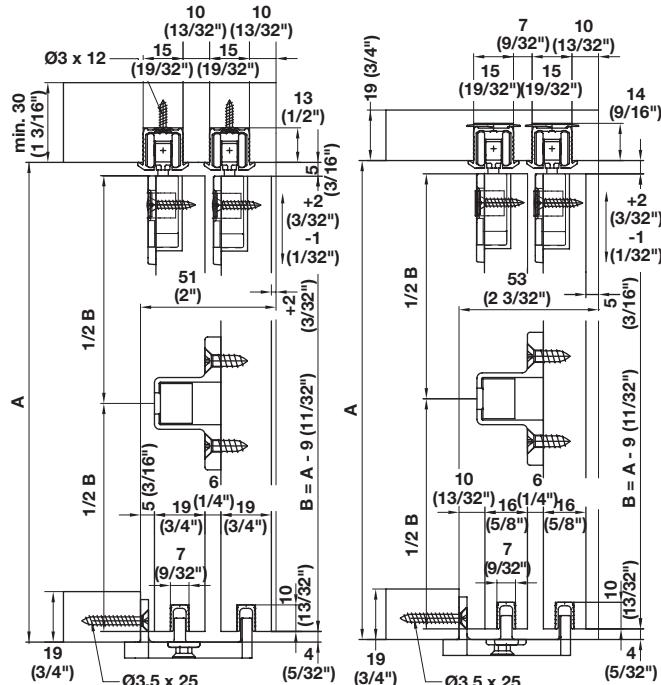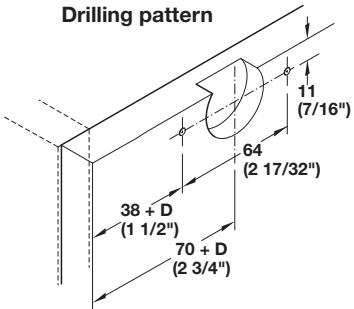


Mounting example
with 19 mm (3/4")
door and track 405.87.082.


Mounting example
with 16 mm (5/8")
door and track 405.87.092.




Upper track,
screw mounted



Double upper track,
screw mounted



Upper track,
for gluing into groove



Upper track,
with rotating fasteners

→ HAWA Clipo 16 H MF Set

	Version	Supplied with	Item No.
For 2 doors	With clip-in door stopper	4 running gears with housings 1 door follower 2 door stoppers with clip-in door stopper 1 guide Mounting material	405.82.118

Supplied With

1 set

Note

Please order running and guide tracks separately. Soft closing mechanism on one side is possible from pitch length of min. 260 mm (10 1/4"), both sides from 460 mm (18 1/8"). Please order soft closing mechanism set for soft closing on both sides separately.


→ Tracks and Accessories

Description		Min. cabinet top thickness	Material	Finish	Length/Door weight	Item No.
Upper track, for gluing into groove (polyurethane glue recommended)		19 (3/4")	Aluminum	mill	2.5 m (8' 2 7/16")	405.87.042
					3.5 m (11' 5 13/16")	405.87.043
Upper track, with rotating fasteners (not suitable for hard wood)		19 (3/4")	Aluminum	mill	2.5 m (8' 2 7/16")	405.87.092
					3.5 m (11' 5 13/16")	405.87.093
Upper track, pre-drilled, for screw mounting		30 (1 3/16")	Aluminum	mill	2.5 m (8' 2 7/16")	405.87.082
					3.5 m (11' 5 13/16")	405.87.083
Double upper track, pre-drilled, for screw mounting		19 (3/4")	Aluminum	mill	2.5 m (8' 2 7/16")	405.90.032
					3.5 m (11' 5 13/16")	405.90.033
Lower guide channel, with harpoon ribs		–	Plastic	anthracite	2.5 m (8' 2 7/16")	405.98.517
Soft closing mechanism, optional for screw mounting to housing					<8 kg (17.6 lbs.)	405.10.077
One set includes two mechanisms. Two sets are required for dual soft closing of two doors.		–	Plastic	–	8–16 kg (17.6–35 lbs.)	405.10.075
Service port, for upper track with rotating fasteners (access running gear after installation)					–	405.83.180
Service port, for upper track for screw mounting (access running gear after installation)		–	Plastic	gray	–	405.83.181


HAWA Clipo 16 HM IF




- > Door weight: max. 16 kg (35 lbs.)
- > Door height: max. 1,400 mm (55 1/8")
- > Door width: max. 1,000 mm (39 3/8")
- > Door thickness: 19 mm (3/4")
- > Height adjustment: +2/-1 mm (+3/32"/-1/32")
- > Running gears for insertion, plastic rollers with metal axles
- > Quick door mounting
- > No guide rails in the cabinet bottom
- > Optional soft closing mechanism

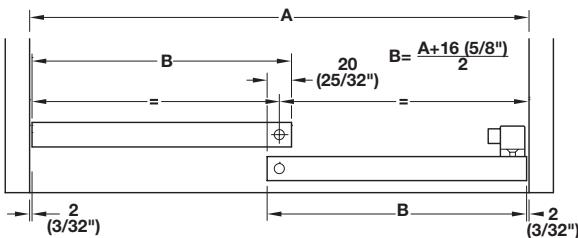



Soft close mounting



Door with one soft closing mechanism.



Door with two soft closing mechanisms.

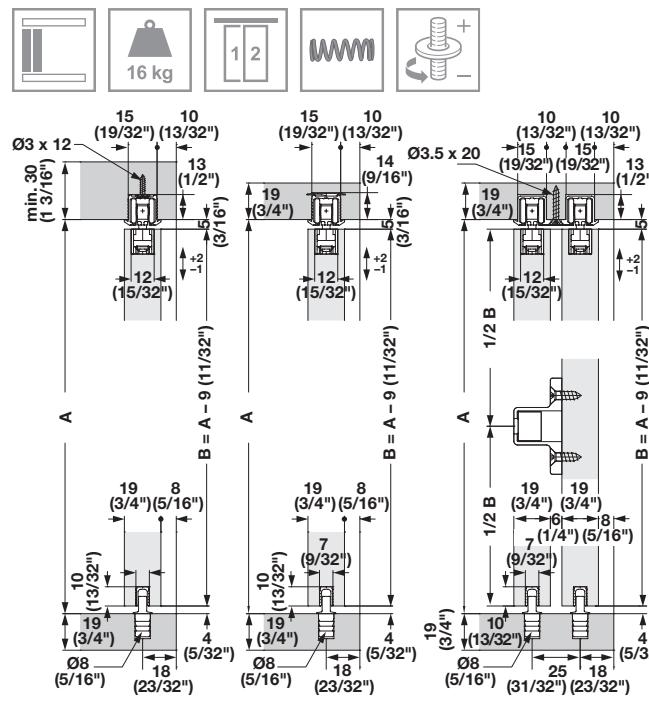
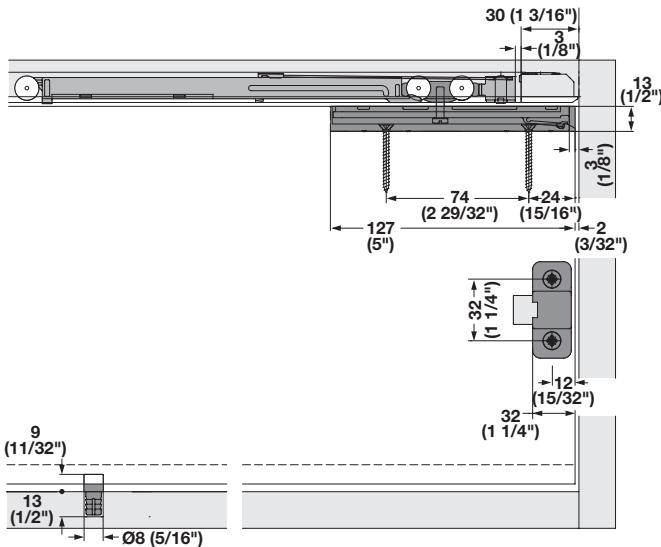


Mounting
example with
19 mm (3/4")
door and track
405.87.082.


**Mounting
example with
19 mm (3/4")
door and track
405.87.092.**

Mounting
example with
19 mm (3/4")
doors and tracks
405.90.032.


Running gear installation

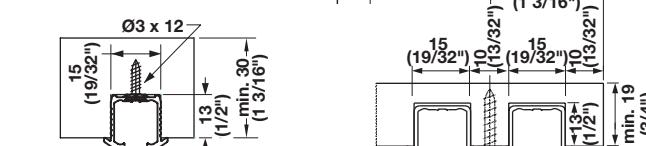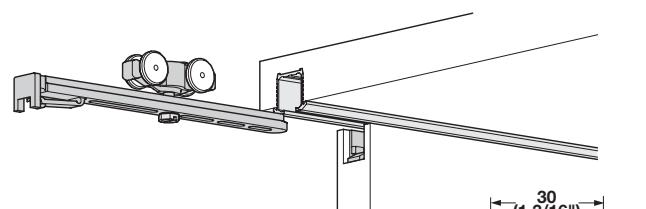


Upper track,
screw mounted



Upper track,
for gluing into groove



Double upper track
screw mounted



Upper track,
with rotating fasteners

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

→ HAWA Clipo 16 HM IF Set

	Version	Supplied with	Item No.
For 1 door	With clip-in door stopper	2 running gears with housings 2 door stoppers with clip-in door stopper 1 floor guide	405.82.220

Supplied With

1 set

Note

Please order running and guide tracks separately. Soft closing mechanism on one side is possible from pitch length of min. 260 mm (10 1/4"), both sides from 460 mm (18 1/8"). Please order soft closing mechanism set for soft closing on both sides separately.

→ Tracks and Accessories

Description		Min. cabinet top thickness	Material	Finish	Length/Door weight	Item No.
Upper track, for gluing into groove (polyurethane glue recommended)		19 (3/4")	Aluminum	mill	2.5 m (8' 2 7/16")	405.87.042
					3.5 m (11' 5 13/16")	405.87.043
Upper track, with rotating fasteners (not suitable for hard wood)		19 (3/4")	Aluminum	mill	2.5 m (8' 2 7/16")	405.87.092
					3.5 m (11' 5 13/16")	405.87.093
Upper track, pre-drilled, for screw mounting		30 (1 3/16")	Aluminum	mill	2.5 m (8' 2 7/16")	405.87.082
					3.5 m (11' 5 13/16")	405.87.083
Double upper track, pre-drilled, for screw mounting		19 (3/4")	Aluminum	mill	2.5 m (8' 2 7/16")	405.90.032
					3.5 m (11' 5 13/16")	405.90.033
Lower guide channel, with harpoon ribs		–	Plastic	anthracite	2.5 m (8' 2 7/16")	405.98.517
Soft closing mechanism, optional for screw mounting to housing		–	Plastic	–	<8 kg (17.6 lbs.)	405.10.077
One set includes two mechanisms. Two sets are required for dual soft closing of two doors.		–	Plastic	–	8–16 kg (17.6–35 lbs.)	405.10.075
Service port, for upper track with rotating fasteners (access running gear after installation)		–	Plastic	gray	–	405.83.180
Service port, for upper track for screw mounting (access running gear after installation)		–	Plastic	gray	–	405.83.181