

Straightening Fitting

→ Straightening Fitting



- > For hinged doors and sliding doors
- > Prevents doors warping in either direction or straightens doors which have become warped
- > Door height: 2,000–2,650 mm (78 3/4"–104 5/16")
- > Door thickness: min. 16 mm (5/8")
- > Recess mounted with screws
- > Adjusts via pre-mounted hexagonal nut, with SW 8 open-ended spanner
- > Material: Threaded bar: Steel; Tensioner: Zinc Alloy; Trim strip: Plastic Finish: Tensioner: nickel-plated; Trim strip: gray

Door height max.	Dim. A	Item No.
2250 (88 9/16")	1838 (72 3/8")	406.99.613
2450 (96 7/16")	1988 (78 1/4")	406.99.614
2650 (104 5/16")	2248 (88 1/2")	406.99.615

Supplied With

1 set (2 straightening fittings including all individual components and open-ended spanner)


Note

2 straightening fittings recommended per door leaf.

Not suitable for hard wood!

Please note when using this product in combination with lacquered panels, a pattern of the routed recesses may emerge on the front.

Installation

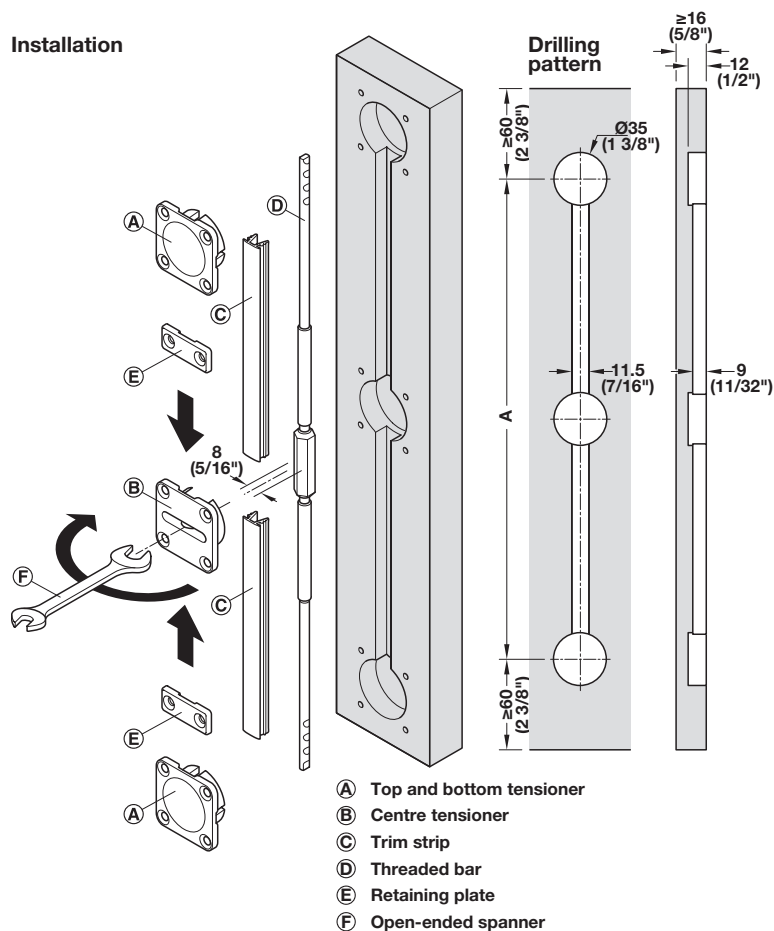

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.