


Accuride

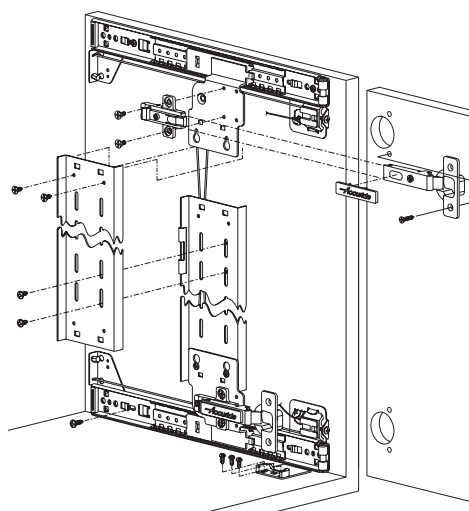

- > Weight capacity: max. 34 kg (75 lbs.)
- > Door thickness: 19–32 mm (3/4"–1 1/4")
- > Door height: up to 1981 mm (78")
(for doors 914–1981 mm (36"–78") tall, see below for additional hinges required)
- > Door width: max. 660 mm (26")
- > Pocket width: 51–64 mm (2"–2 1/2") depending on door thickness
- > Vertically mounted concealed doors
- > Entertainment centers, audio-visual conference centers
- > Anti-Rak Cable System
- > Detent-out, silenced open and close
- > Material: Steel; Finish: black

Note


For doors 21 mm (13/16") or thicker, please order 1432 and the optional 40 mm hinge kit.



→ 1332/1432

7

Sliding and Roller Shutter Systems

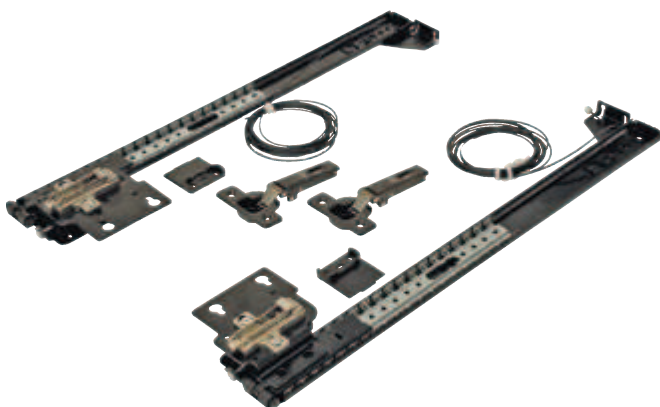

Slide length	Slide travel	1332 with 35 mm hinges	1432 without hinges
305 (12")	8 1/4" (210)	408.24.430	408.24.530
356 (14")	10 1/4" (261)	408.24.435	408.24.535
406 (16")	12 5/16" (312)	408.24.441	408.24.541
457 (18")	13 1/2" (343)	408.24.446	408.24.546
508 (20")	15 1/2" (394)	408.24.451	408.24.551
559 (22")	17 1/2" (445)	408.24.456	408.24.556
610 (24")	19 1/2" (496)	408.24.461	408.24.561
660 (26")	21 1/2" (546)	408.24.466	408.24.566
711 (28")	23 1/2" (597)	408.24.471	408.24.571
762 (30")	25 1/2" (648)	408.24.476	408.24.576
813 (32")	27 1/2" (699)	408.24.481	408.24.581

1332 Supplied With

Hinge kit, Slide mounting hardware kit, Mounting instructions

1432 Supplied With


Slide mounting hardware kit, Mounting instructions

Note


Maximum 19 mm (3/4") door thickness.

Requires 0 mm mounting plate - 329.71.500 (order separately).

1432 Overlay Application

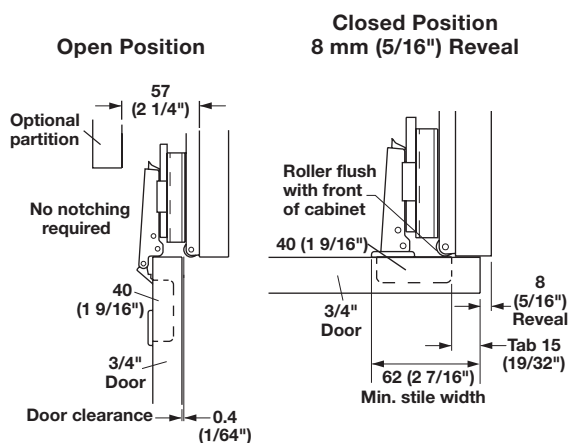

Flush Inset Application

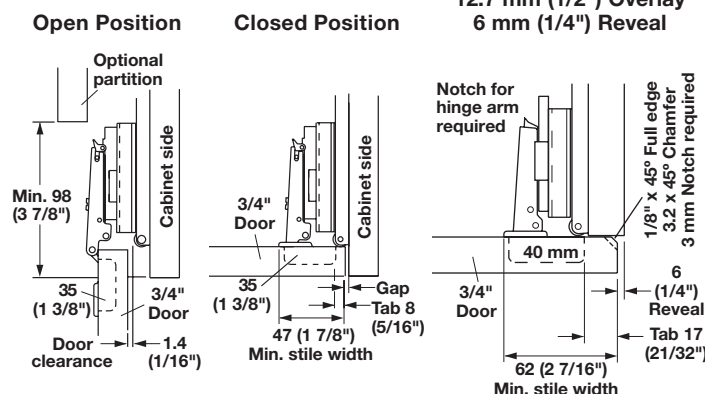

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.