

- > Door width: max. 610 mm (24") for 2 doors
- > Height adjustment: +/- 2 mm (3/32")
- > Depth adjustment: +2.5 mm (1/8")
- > Doors can be mounted to the left or right cabinet side
- > Provides excellent access to the cabinet interior
- > Concealed hinges are required; 329.17.507 (hinge) and 329.71.502 (mounting plate) are recommended
- > Minimal space of approximately 80 mm (3 1/8") is taken up by the door in the maximum open position

Note


Weight capacity depends on the number of hinges. See chart on next page.

→ Hardware

	Description	Item No.
21.5 (27/32")	Hinge for sliding block	409.95.710
	Sliding block	409.95.720
3-3	Locating device	409.95.750
11 42 (7/16") (1 21/32") 10 (13/32") 10 (13/32") 10 (13/32") (0/16") 10 (13/32") (0/16") (0/13/32") (1/1/4") (3/4")	Central hinge	354.07.710

→ Tracks

> Length: 1180 mm (46 7/16")

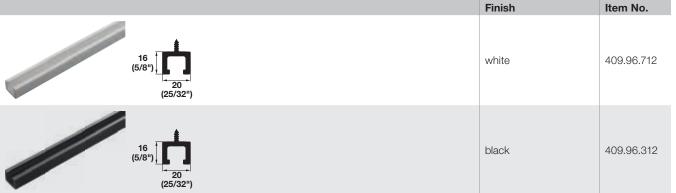

329.17.507 hinge	page 9.20	
329.71.502 mounting plate	page 9.38	

Sliding and Roller Shutter Systems

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to atter specifications without notice.