

→ Häfele Slido F-Line14 25A Set


	For glass thickness	Version	Material	Finish/Color	Item No.
Running gear, for sliding in and tightening	6 (1/4")	–	Steel	zinc-plated, Rollers: plastic coated, white	415.13.104
Mounting aid for running gear	6 (1/4")	–	Plastic	–	415.13.060
Anti-derailment device and clatter prevention for clipping on and screw mounting into the guide track, we recommend using 3 pcs. for each door: 1 each left/right and 1 central	6 (1/4")	–	Plastic	white translucent	415.13.050
End piece closed type, for clipping on and bonding on site	6 (1/4")	–	Plastic	matt chrome-plated	415.13.020
End piece with glass groove, for clipping on and bonding on site	6 (1/4")	–	Plastic	matt chrome-plated	415.13.021
End piece with handle, closed type, for clipping on and tightening	6 (1/4")	–	Plastic	matt chrome-plated	415.13.170
End piece with handle, with glass groove, for clipping on and tightening	6 (1/4")	–	Plastic	matt chrome-plated	415.13.010
End piece with lock and glass groove	6 (1/4")	Keyed alike	Zinc alloy	matt chrome-plated	233.02.420

→ Tracks and Accessories


Description		For glass thickness	Material	Finish/Color	Length	Item No.
Double top guide track, for screw mounting		6 (1/4")	Aluminum	silver colored anodized	2.5 m (8' 2 7/16")	415.10.925
Double top guide track, for screw mounting Note Anti-derailment device cannot be installed.		6 (1/4")	Aluminum	Outside: silver colored anodized, Inside: flocked	2.5 m (8' 2 7/16")	415.10.882
Double bottom running track, for screw mounting		6 (1/4")	Aluminum	silver colored anodized	2.5 m (8' 2 7/16")	415.11.925
Double bottom running track, for screw mounting, suitable for use with Dialock EFL 41		–	Aluminum	silver colored anodized	3.5 m (11' 5 13/16")	415.08.972
Runner housing profile, for mounting the running gear to the glass door		6 (1/4")	Aluminum	silver colored anodized	2.5 m (8' 2 7/16")	415.12.652
Clip-on profile for glass, for sliding into runner housing profile		6 (1/4")	Plastic	gray	2.5 m (8' 2 7/16")	415.13.622
Dust protection profile, for glue mounting		6 (1/4")	Aluminum/ Plastic	silver colored anodized	–	416.13.932

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.

Häfele Slido F-Line14 25A

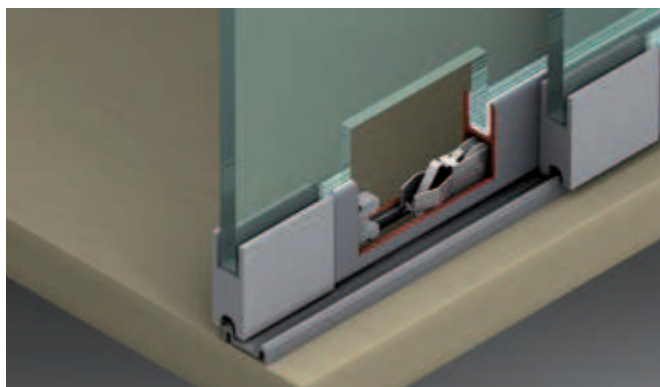

- > Door weight: max. 25 kg (55 lbs.)
- > Door height: max. 1,400 mm (4' 7 1/8")
- > Door width: min. 600 mm (1' 11 5/8")
- > Door width: max. 1,200 mm (3' 11 1/4")
- > For glass thickness: 6 mm (1/4")
- > Running gear with slide-in technology for quick and easy installation
- > Very smooth running action
- > Perfect for interior transaction windows and showcase cabinets



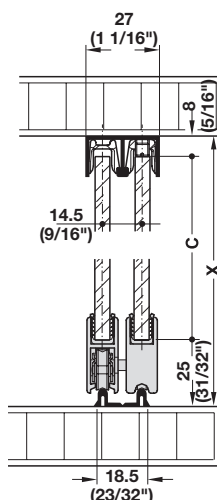


Calculations:

Glass height: $C = X - (25 + 8)$
(31/32" + 5/16")

7

Sliding and Roller Shutter Systems




Glass width calculation D (D1 and D2):

CN = number of doors
IA = internal cabinet width
F = gap
G = door overlap


①, ③ $D1 = \frac{(CN-1) \times G + IA}{CN} - 5 - (2 \times F)$

②, ④, ⑤ $D2 = \frac{(CN-1) \times G + IA}{CN} - (2 \times F)$


① End cap




② End cap




③ Glass profile grip



④ Glass profile grip



⑤ Lock housing and cylinder core



Running gear installation into glass profile

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.