

304 Stainless Steel, Full Extension


→ ESR-3813 Side Mounted



- > Weight capacity: 29–42 kg (64–98 lbs.)/pair
- > 12 mm (1/2") side space required
- > Profile height: 37 mm (1 1/2")
- > Lever disconnect
- > Hold-in detent
- > Not rated for MRI
- > Material: 304 Stainless Steel, passivated

Note

M4 or #8 pan head screws are recommended.

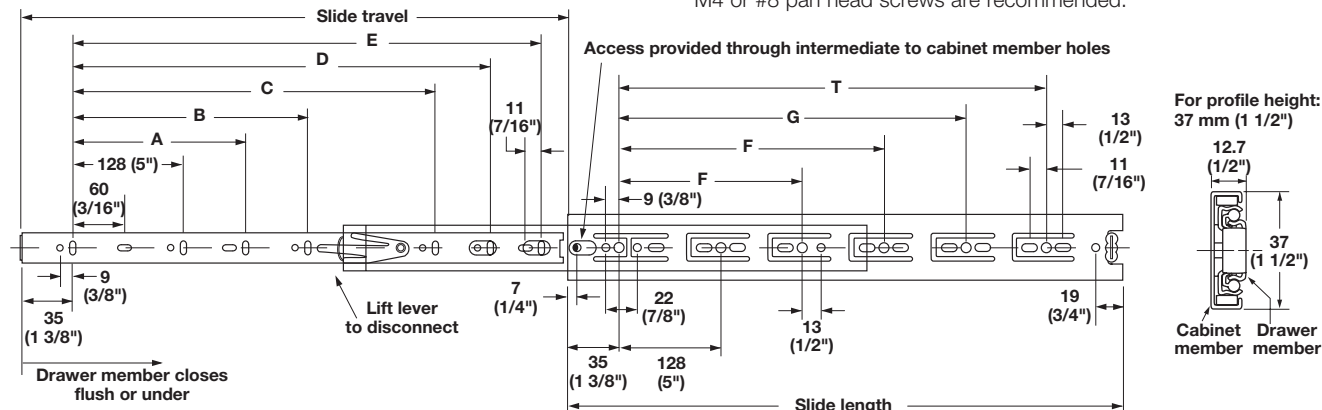

Length	Travel	Weight per/pair	A	B	C	D	E	F	G	T	Item No.
250 (9 7/8")	243 (10")	42 kg (92 lbs.)	-	-	-	-	192 (7 9/16")	-	-	-	420.42.025
300 (11 13/16")	305 (12")	40 kg (88 lbs.)	-	-	-	-	242 (9 1/2")	224 (13/16")	-	-	420.42.030
350 (13 3/4")	355 (14")	38 kg (84 lbs.)	-	-	-	-	292 (11 1/2")	224 (13/16")	-	-	420.42.035
400 (15 3/4")	406 (16")	36 kg (79 lbs.)	-	-	-	-	342 (13 1/2")	224 (13/16")	320 (2 5/8")	-	420.42.040
450 (17 3/4")	457 (18")	34 kg (75 lbs.)	-	-	320 (2 5/8")	-	392 (15 1/2")	224 (13/16")	352 (2 5/8")	-	420.42.045
500 (19 11/16")	508 (20")	33 kg (73 lbs.)	-	-	320 (2 5/8")	-	442 (17 1/2")	224 (13/16")	416 (16 3/8")	-	420.42.050
550 (21 11/16")	559 (22")	31 kg (68 lbs.)	-	-	320 (2 5/8")	416 (16 3/8")	492 (19 1/2")	224 (13/16")	352 (2 5/8")	448 (17 5/8")	420.42.055
600 (23 11/16")	610 (24")	29 kg (64 lbs.)	224 (13/16")	-	416 (16 3/8")	-	542 (21 1/2")	224 (13/16")	352 (2 5/8")	480 (18 7/8")	420.42.060