


Grass Elite Plus Accessories




> Choose from required front locking devices

→ 2D Adjustable Front Locking Device, required

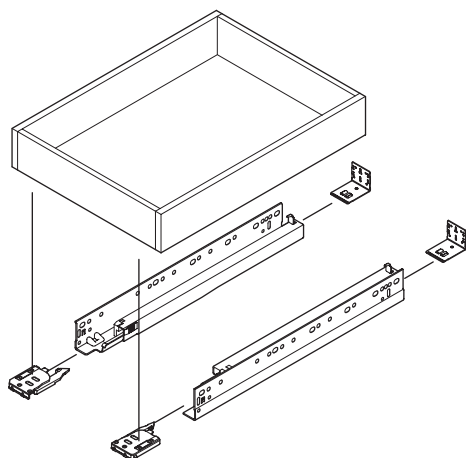

> +/- 1.5 mm (1/16") side
> +/- 2.5 mm (1/8") height
> Material: Plastic

→ 1D Front Locking Device, required

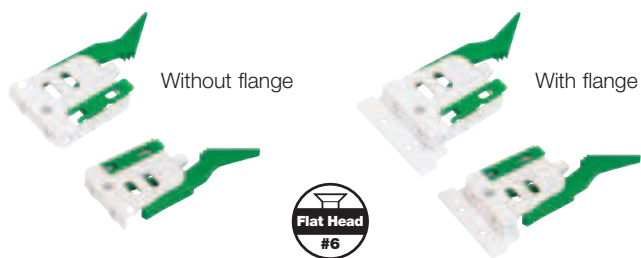

> Material: Plastic

Version	Handing	Pairs	Bulk
Without flange	right	433.30.008	433.30.004
Without flange	left		433.30.005
With flange	right	433.30.011	433.30.009
With flange	left		433.30.010


Version	Handing	Pairs	Bulk
Without flange	right	433.30.008	433.30.004
Without flange	left		433.30.005
With flange	right	433.30.011	433.30.009
With flange	left		433.30.010

Bulk Supplied With
200 pairs

→ Rear Mounting Bracket, optional



Rear Bracket Position

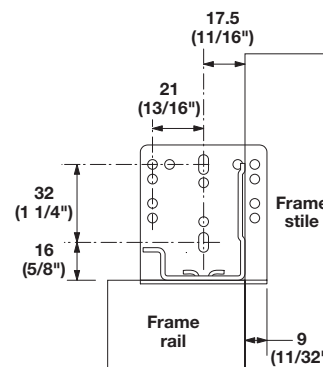

For face frame applications only.
Use minimum of 3 screws per bracket,
#6 x 1/2" truss head screws

Bulk Supplied With
200 pairs

→ Drilling Template



> For use with a standard 6 mm (1/4") drill bit and stop collar


> For use in face frame applications
> Material: Steel

	Item No.
	433.25.996

Finish	Item No.
zinc-plated	433.19.051

Grass Dynapro Accessories

→ Rear Adjustment Adapters, required for 3D

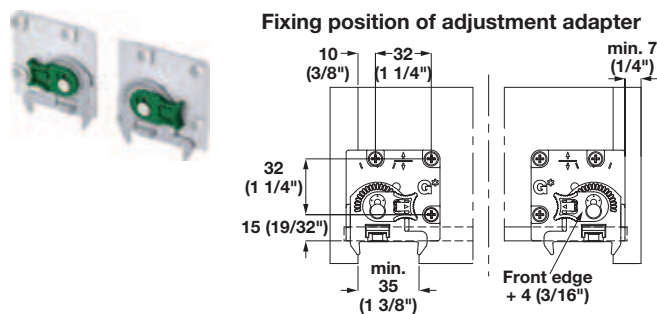

- > Provides tilt adjustment +4 mm (5/32")
- > Material: Plastic; Color: gray

Handing	Bulk	Pairs
Left	433.19.041	433.19.029
Right	433.19.042	

Bulk Supplied With
200 pairs

→ Dynapro Tipmatic Piston



- > Replace the existing soft close mechanism with the Tipmatic piston to convert the slide to a PUSH function
- > L x W x D: 178 x 20 x 5 mm (7" x 13/16" x 3/16")
- > Material: Plastic; Color: gray

Slide length	Handing	Item No.
228–305 (9"–12")	left	433.19.063
	right	433.19.062
381–533 (15"–21")	left	433.19.061
	right	433.19.060


→ Drawer Drilling Template



- > Material: Plastic

Color	Item No.
green	433.19.010

→ Rear Mounting Socket

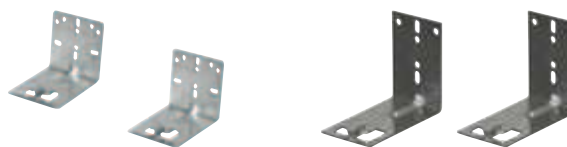

- > Non-handed
- > For 305–533 mm (12"–21") slides
- > Material: Steel; Finish: zinc-plated

Version	Item No.
Standard	433.19.051
Narrow	433.19.057

→ Rear Mounting Socket



- > Non-handed
- > For 228 mm (9") slides
- > Installation depth min. 273–352 mm (10 3/4"–13 7/8")
- > Material: Steel

Finish	Item No.
zinc-plated	433.19.052

Supplied With
Left socket, right socket, 4 M5 x 8 screws

→ Dynapro Depth Adjuster



- > For heavy duty and extended lengths
- > Provides +4.5 mm (3/16") forward adjustment
- > Use with zinc clips
- > Material: Plastic


Color	Item No.
gray	433.19.047

Supplied With
5 left, 5 right

Grass Full Access

Weight capacity: 35 kg (75 lbs.)/pair

- Face frame application
- Integrated soft close liquid damper
- Self latching front locking devices have easy release levers for drawer removal
- Front locking device is height adjustable 2.5 mm (3/32")
- Meets or exceeds ANSI/BHMA Grade 1 testing requirements

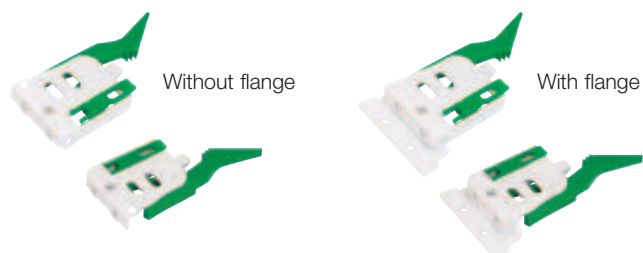

Maxcess

Material: Steel; Finish: zinc-plated

Drawer Length	Min. Installation Depth	5 Pack	Bulk Pack
229 (9")	273 (10 3/4")	433.30.100	-
305 (12")	349 (13 3/4")	433.30.101	-
381 (15")	426 (16 25/32")	433.30.102	433.30.112
457 (18")	502 (19 3/4")	433.30.103	433.30.113
533 (21")	578 (22 3/4")	433.30.104	433.30.114



Elite Plus Front Locking Device, required

- Height adjustable 2.5 mm (3/32")

Material: Plastic; Color: white

Handing	Version	Item No.
right	without flange	433.30.000
left	without flange	433.30.001
right	with flange	433.30.002
left	with flange	433.30.003

Elite Plus Rear Mounting Bracket, required


- For use in face frame applications

Material: Steel

Finish	Item No.
zinc-plated	433.19.051



Rear Bracket Position

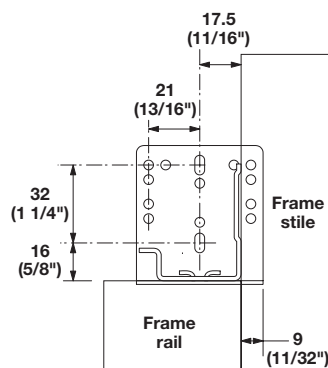

For face frame applications only. Use minimum of 3 screws per bracket, #6 x 1/2" truss head screws

Dimensional data not binding. We reserve the right to alter specifications without notice.

Dimensions in mm
Inches are approximate

Grass Full Extension Accessories



Rear Mounting Socket

- Non-handed
- For 12 – 21" slides

Material: Steel

Finish	Item No.
zinc-plated	433.19.051



Rear Mounting Socket

- Non-handed
- For 9" slides
- Installation depth min. 269 – 299 mm (10 19/32" – 11 3/4")

Material: Steel

Finish	Item No.
zinc-plated	433.19.052

Supplied With

Left socket, Right socket, 4 M5 x 8 screws



Dynapro Tipmatic Piston

- For Dynapro 9" and 12"
 - Replace the existing soft-close mechanism with the Tipmatic piston to convert the slide to a PUSH function
- L x W x D: 178 x 20 x 5 mm (7" x 13/16" x 3/16")

Material: Plastic; Color: gray

Version	Item No.
left	433.19.063
right	433.19.062



Dynapro Depth Adjuster

- For inset drawers
- Provides +4.5 mm (3/16") forward adjustment

Material: Plastic; Color: gray

	Item No.
	433.19.047

Supplied With

5 Left, 5 Right



Dynapro Drawer Drilling Template

Material: Plastic

	Item No.
	433.19.010

Note

Color may vary.

Dimensions in mm
 Inches are approximate