

Casters

Caster Features



With or
without brake



Nylon hood
and wheel




Hard wheel surface



Wheel diameter
40 or 50 mm


- > For light duty applications
- > Well-spaced wheels for exceptionally smooth running action
- > Hard, abrasion-proof surface is particularly suitable for soft floor coverings such as carpets
- > Weight capacity: 35 kg (77 lbs.) per caster

→ Caster

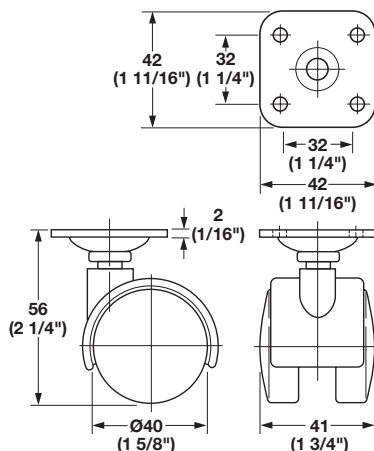

- > With mounting plate
- > Wheel Ø: 40 mm (1 5/8")
- > Material: Nylon, Steel; Finish: black matt

→ Caster

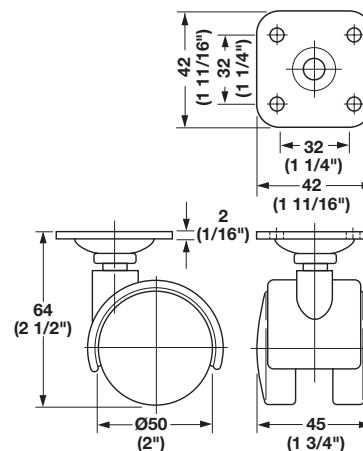


- > With mounting plate
- > Wheel Ø: 50 mm (2")
- > Material: Nylon, Steel; Finish: black matt

Version	Item No.
Without brake	660.04.331
With brake	660.05.331


Version	Item No.
Without brake	660.04.351
With brake	660.05.351

→ Caster

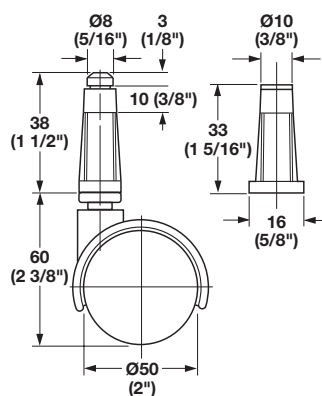

- > With plastic socket
- > For press fitting into a Ø10 mm (3/8") hole
- > Wheel Ø: 50 mm (2")
- > Material: Nylon, Steel; Finish: black matt

→ Caster

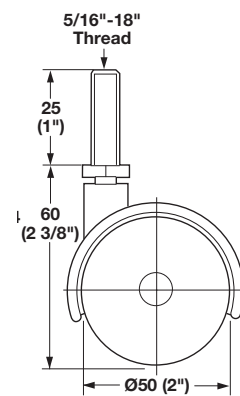

- > With threaded stem
- > Thread: 5/16"-18
- > Wheel Ø: 50 mm (2")
- > Material: Nylon, Steel; Finish: black matt

Version	Item No.
Without brake	660.89.323
With brake	660.86.322

Version	Item No.
Without brake	660.04.353
With brake	660.05.353

Supplied With
4 Casters

Note
Threaded inserts and brackets required.

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.