

# LED 2023

## RECESS MOUNTED LIGHT, SQUARE

0 100%




Water Tolerant

12 V SYSTEM

IP44

- > Protected from water spray as a recess mounted light
- > Can be used as a surface mounted light using optional surface mount rings
- > Degree of Protection: IP44 recess; IP20 surface

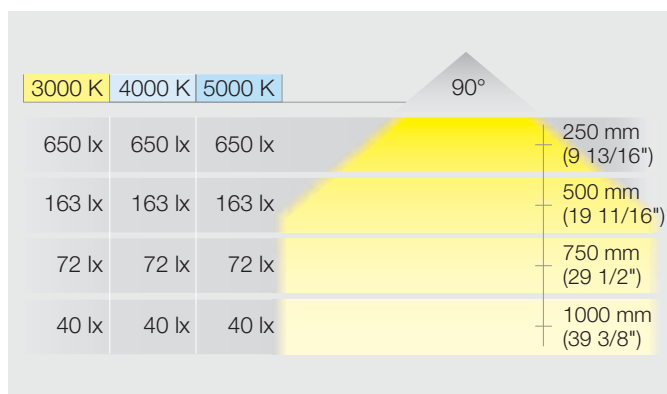



| Item No.                                                                         | 833.72.060                                  | 833.72.064                 | 833.72.061                | 833.72.065                 | 833.72.062                | 833.72.066                 |
|----------------------------------------------------------------------------------|---------------------------------------------|----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| SRP                                                                              | \$20.00                                     | \$20.00                    | \$20.00                   | \$20.00                    | \$20.00                   | \$20.00                    |
| Light Color (K)                                                                  | 3000 (warm white)                           |                            | 4000 (cool white)         |                            | 5000 (cool white)         |                            |
| Drill hole                                                                       | Ø26 mm (1 1/16")                            |                            |                           |                            |                           |                            |
| L x W x H                                                                        | 30 x 30 x 14 mm (1 3/16" x 1 3/16" x 9/16") |                            |                           |                            |                           |                            |
| Wattage                                                                          | 1.5                                         |                            |                           |                            |                           |                            |
| LEDs                                                                             | 3                                           |                            |                           |                            |                           |                            |
| Lumen                                                                            | 105                                         |                            |                           |                            |                           |                            |
| Lumen per watt                                                                   | 70                                          |                            |                           |                            |                           |                            |
| CRI                                                                              | 82                                          |                            |                           |                            |                           |                            |
| Energy Efficiency class                                                          | A+                                          |                            |                           |                            |                           |                            |
| Weighted energy consumption                                                      | 1.65                                        |                            |                           |                            |                           |                            |
| Material                                                                         | Aluminum                                    |                            |                           |                            |                           |                            |
| Finish                                                                           | chrome-plated<br>polished                   | silver colored<br>anodized | chrome-plated<br>polished | silver colored<br>anodized | chrome-plated<br>polished | silver colored<br>anodized |
| Supplied with                                                                    | 2 m (78 3/4") lead                          |                            |                           |                            |                           |                            |
| Note Loox Lights and Drivers are “Suitable for use within Closet Storage Spaces” |                                             |                            |                           |                            |                           |                            |

# Recess/surface mounted lights

Monochrome, drill hole Ø: 26 mm (1")



## Häfele Loox LED 2023

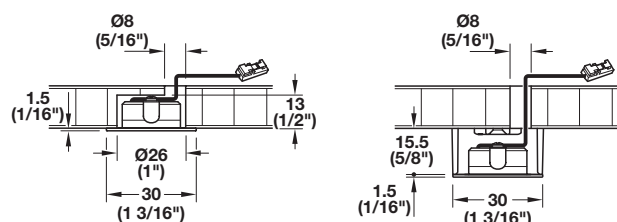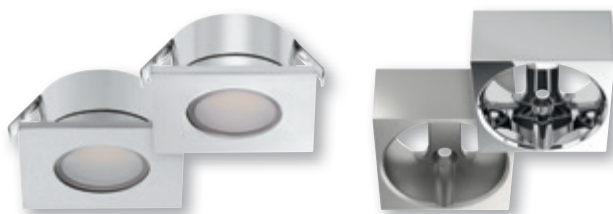

Recess mounting

Surface Mounting

| 3000 K | 4000 K | 5000 K | 90° |                    |
|--------|--------|--------|-----|--------------------|
| 650 lx | 650 lx | 650 lx |     | 250 mm (9 13/16")  |
| 163 lx | 163 lx | 163 lx |     | 500 mm (19 11/16") |
| 72 lx  | 72 lx  | 72 lx  |     | 750 mm (29 1/2")   |
| 40 lx  | 40 lx  | 40 lx  |     | 1000 mm (39 3/8")  |

- > Dimmable: Yes
- > Material: Aluminum
- > L x W: 30 x 30 mm (1 3/16" x 1 3/16")
- > Energy efficiency class: A+
- > Degree of protection: IP44 as recess mounted light  
IP20 as surface mounted light
- > Number of LEDs: 3
- > Mounting: For mounting in drilled hole, for clamp fixing
- > Drill hole Ø: 26 mm (1")
- > Supplied with: 1 light with 2000 mm (78 3/4") lead



12 V 5 12 V

Loox5 12 V driver see page 124  
Please order 6-piece adapter set  
833.95.753 separately, see page 116.



The IP44 degree of protection is reduced to IP20 when surface mounting or recess mounting with through hole.



### Note

Loox lights and drivers are "Suitable for use within closet storage spaces"



> Housing, square, Plastic

| Color          | Item No.   |
|----------------|------------|
| Silver colored | 833.72.834 |
| Chrome-plated  | 833.72.835 |

| Voltage<br>V | Color temperature<br>K | Wattage<br>W | Luminous flux<br>lm | Luminous efficacy<br>lm/W | Color rendering index CRI<br>R <sub>a</sub> | Weighted energy consumpt.<br>kWh/1000 h | Silver colored anodized | Polished chrome-plated |
|--------------|------------------------|--------------|---------------------|---------------------------|---------------------------------------------|-----------------------------------------|-------------------------|------------------------|
| 12 V         | 3000                   | 1.5          | 105                 | 70                        | 82                                          | 1.65                                    | 833.72.064              | 833.72.060             |
|              | 4000                   | 1.5          | 105                 | 70                        | 82                                          | 1.65                                    | 833.72.065              | 833.72.061             |
|              | 5000                   | 1.5          | 105                 | 70                        | 82                                          | 1.65                                    | 833.72.066              | 833.72.062             |