

LED 2025/2026

RECESS/SURFACE MOUNTED LIGHT, MODULAR

0/100%



Water Tolerant

12 V SYSTEM

IP44

- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Compatible with Loox and E-series drivers only
- > Degree of Protection: IP44 recess mounted
IP20 surface mounted

Note

Trim rings and leads sold separately.

LED 2025				LED 2026				80°
2700 K	3000 K	4000 K	5000 K	2700 K	3000 K	4000 K	5000 K	
2600 lx	2650 lx	2700 lx	2800 lx	1400 lx	1800 lx	1850 lx	1950 lx	250 mm (9 13/16")
730 lx	750 lx	780 lx	800 lx	400 lx	500 lx	520 lx	550 lx	500 mm (19 11/16")
320 lx	350 lx	345 lx	350 lx	175 lx	225 lx	235 lx	250 lx	750 mm (29 1/2")
180 lx	185 lx	185 lx	190 lx	100 lx	125 lx	135 lx	140 lx	1000 mm (39 3/8")

	LED 2025				LED 2026			
Item No.	833.72.350	833.72.351	833.72.352	833.72.323	833.72.360	833.72.361	833.72.362	833.72.137
SRP	\$40.00	\$40.00	\$40.00	\$40.00	\$40.00	\$40.00	\$40.00	\$40.00
Light Color (K)	2700 warm white	3000 warm white	4000 cool white	5000 cool white	2700 warm white	3000 warm white	4000 cool white	5000 cool white
Drill hole	Ø58 mm (2 1/4")							
Ø x H	61.2 x 13.5 mm (2 7/16" x 17/32")							
Wattage	3.8				3.0			
LEDs	1 (COB) - chip on board				6			
Lumen	270	300	306	345	185	210	221	260
Lumen per watt	71	78	80	90	62	70	74	87
CRI	90*			83	90*			83
Energy Efficiency class	A+							
Weighted energy consumption	4.18				3.30			
Material	Aluminum							
Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"								

Recess/surface mounted lights


Modular monochrome, drill hole Ø: 58 mm (2 5/16")

Häfele Loox LED 2025, Loox5 2092/3092

Voltage V	Quantity LEDs	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI		Weighted energy consumpt. kWh/1000 h	Item No.
5 12 V	LED 2025 (compatible with Loox5 lead with snap-in connector)								
	1	2700	3.8	270	71	>90	–	4.18	833.72.350
		3000	3.8	300	78	>90	–	4.18	833.72.351
		4000	3.8	306	80	>90	–	4.18	833.72.352
		5000	3.8	345	90	>83	–	4.18	833.72.323
	LED 2092								
	6	2700	3.4	220	65	>90	>55	3.74	833.72.474
		3000	3.4	240	71	>90	>55	3.74	833.72.475
		4000	3.4	250	74	>90	>55	3.74	833.72.476
		5000	3.4	260	76	>90	>55	3.74	833.72.477
5 24 V	LED 3092								
	6	2700	3.4	220	65	>90	>55	3.74	833.75.174
		3000	3.4	240	71	>90	>55	3.74	833.75.175
		4000	3.4	250	74	>90	>55	3.74	833.75.176
		5000	3.4	260	76	>90	>55	3.74	833.75.177




Recess mount housing

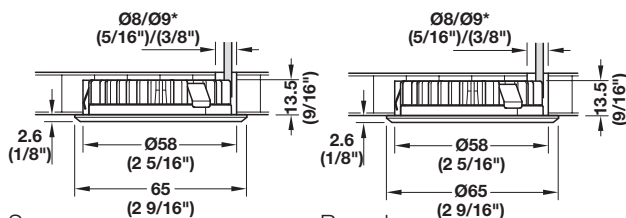


Square

Round



Surface mount housing

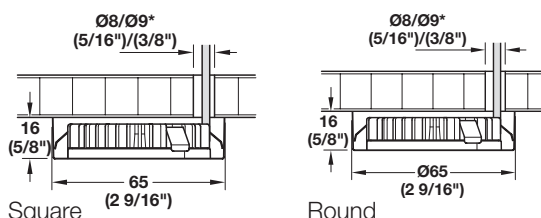


Square

Round

Housings are suitable for monochrome lights and for multi-white lights.

* valid for multi-white plugs.



> Lead, 1.5 A/24 AWG, with snap-in connector

Voltage	Length	Item No.
5 12 V	1000 (39 3/8")	833.95.789
	2000 (78 3/4")	833.95.788
5 24 V	2000 (78 3/4")	833.95.791



> Housing, recess mounted, Plastic

Color	Round	Square
Black	833.72.168	833.72.172
Anthracite	833.72.380	833.72.383
Brown	833.72.381	833.72.384
Matt nickel-plated	833.72.170	833.72.174
Stainless steel colored	833.72.382	833.72.385
Silver colored	833.72.126	833.72.127
White, RAL 9003	833.72.171	833.72.175



> Housing, surface mounted, Plastic

Color	Round	Square
Black	833.72.160	833.72.164
Anthracite	833.72.193	833.72.195
Brown	833.72.192	833.72.196
Matt nickel-plated	833.72.162	833.72.166
Stainless steel colored	833.72.194	833.72.197
Silver colored	833.72.124	833.72.125
White, RAL 9003	833.72.163	833.72.167