

Recess/surface mounted lights


Modular monochrome, drill hole Ø: 58 mm (2 5/16")

Häfele Loox LED 2025, Loox5 2092/3092

Voltage V	Quantity LEDs	Color temperature K	Wattage W	Luminous flux lm	Luminous efficacy lm/W	Color rendering index CRI		Weighted energy consumpt. kWh/1000 h	Item No.
5 12 V	LED 2025 (compatible with Loox5 lead with snap-in connector)								
	1	2700	3.8	270	71	>90	–	4.18	833.72.350
		3000	3.8	300	78	>90	–	4.18	833.72.351
		4000	3.8	306	80	>90	–	4.18	833.72.352
		5000	3.8	345	90	>83	–	4.18	833.72.323
	LED 2092								
	6	2700	3.4	220	65	>90	>55	3.74	833.72.474
		3000	3.4	240	71	>90	>55	3.74	833.72.475
		4000	3.4	250	74	>90	>55	3.74	833.72.476
		5000	3.4	260	76	>90	>55	3.74	833.72.477
5 24 V	LED 3092								
	6	2700	3.4	220	65	>90	>55	3.74	833.75.174
		3000	3.4	240	71	>90	>55	3.74	833.75.175
		4000	3.4	250	74	>90	>55	3.74	833.75.176
		5000	3.4	260	76	>90	>55	3.74	833.75.177




Recess mount housing

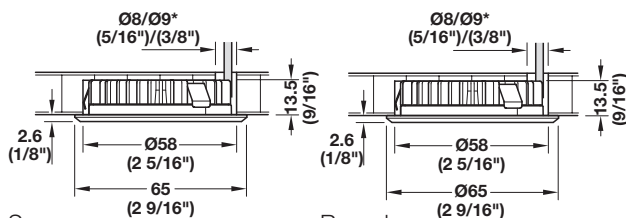


Square

Round



Surface mount housing

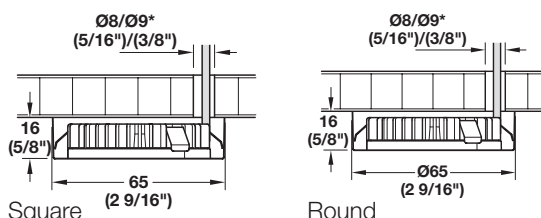


Square

Round

Housings are suitable for monochrome lights and for multi-white lights.

* valid for multi-white plugs.



> Lead, 1.5 A/24 AWG, with snap-in connector

Voltage	Length	Item No.
5 12 V	1000 (39 3/8")	833.95.789
	2000 (78 3/4")	833.95.788
5 24 V	2000 (78 3/4")	833.95.791



> Housing, recess mounted, Plastic

Color	Round	Square
Black	833.72.168	833.72.172
Anthracite	833.72.380	833.72.383
Brown	833.72.381	833.72.384
Matt nickel-plated	833.72.170	833.72.174
Stainless steel colored	833.72.382	833.72.385
Silver colored	833.72.126	833.72.127
White, RAL 9003	833.72.171	833.72.175



> Housing, surface mounted, Plastic

Color	Round	Square
Black	833.72.160	833.72.164
Anthracite	833.72.193	833.72.195
Brown	833.72.192	833.72.196
Matt nickel-plated	833.72.162	833.72.166
Stainless steel colored	833.72.194	833.72.197
Silver colored	833.72.124	833.72.125
White, RAL 9003	833.72.163	833.72.167